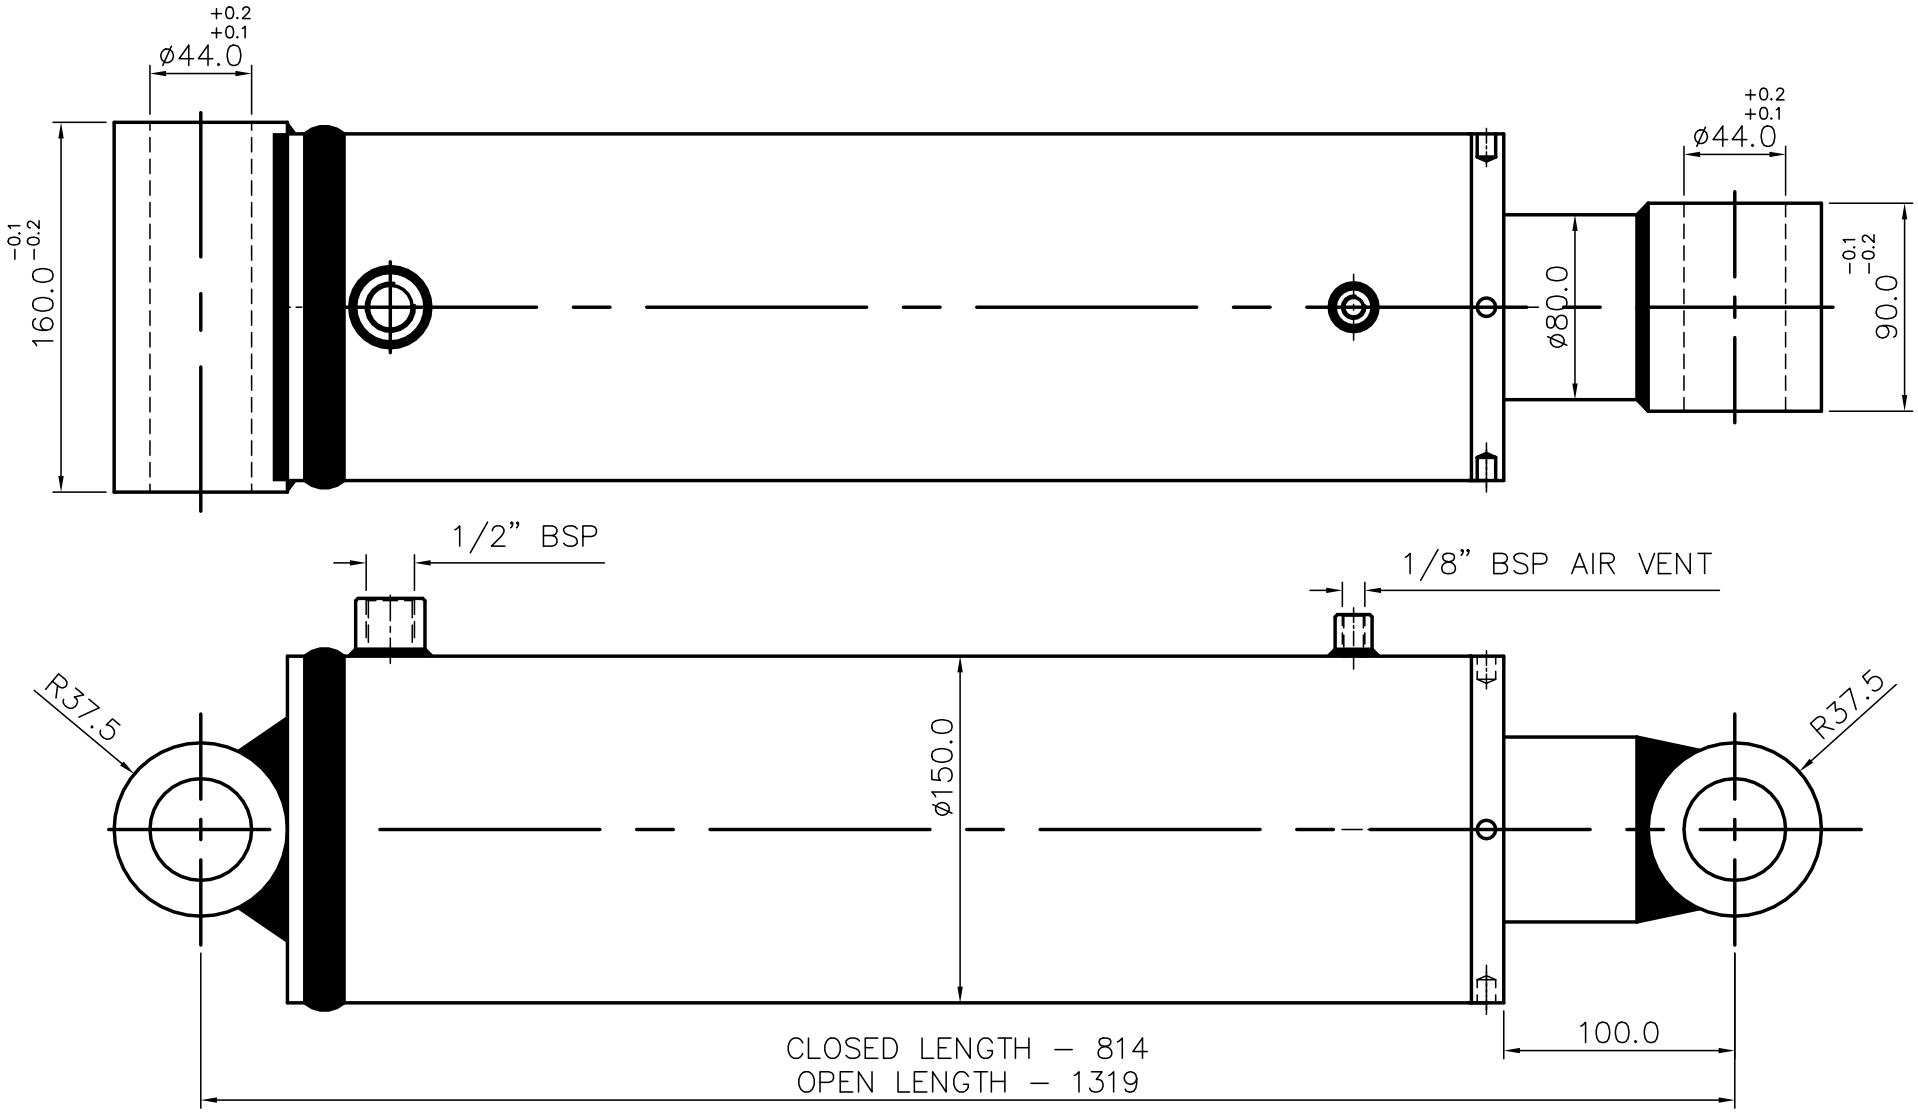


SEAL KIT DETAILS

SR.NO	DISCRIPTION	QTY/SET	SIZE/PART No.	MTRL
1	PISTON SEAL	1	PS008–F–1250–1095–063	VITON
2	WIPER SEAL	1	DS055–F–0800–0880–060080	VITON
3	'O'RING	1	ID54.40X3.10C/S	VITON
4	'B'RING	1	ID55xOD60X1.4TH	PTFE
5	PISTON GUIDE	2	W9.7xT2.5xTL376	TURCITE

SPECIFICATIONS.
SINGLE ACTING HYD.CYL.
WELDED CONSTRUCTION
BORE – ø125mm
PISTON ROD – ø80mm
STROKE – 505mm
MTG – REAR EYE & ROD EYE
WORKING PRESSURE – 200 BAR
TEMP.RANGE– –20° TO +150°C
SEAL- VITON SEAL

PAINT– ONE COAT OF EPOXY PRIMER

CLIENT:– M/S. NIHVA TECHNOLOGIES PVT. LTD.

DUTTA CONTROL
GAT NO.83,JYOTIBANAGAR,
TALWADE,TAL–HAVELI,
PUNE–412114 (INDIA)

	NAME
DGN.	
DRN.	S.N.G.
CHD.	R.S.C.
APPD.	
DATE	17/11/18

ALL DIMENSIONS ARE IN mm.

SCALE–1:1

DRG. NAME
G.A.DRG. FOR ø125x505 STROKE
SINGLE ACTING HYD. CYL.

DRG. NO.
17_11_001_125_505