
Spare part list
RR 3000 R



2013-05 Index 00

Side frame right	RR3000R
Seitenteil rechts	RR3000R

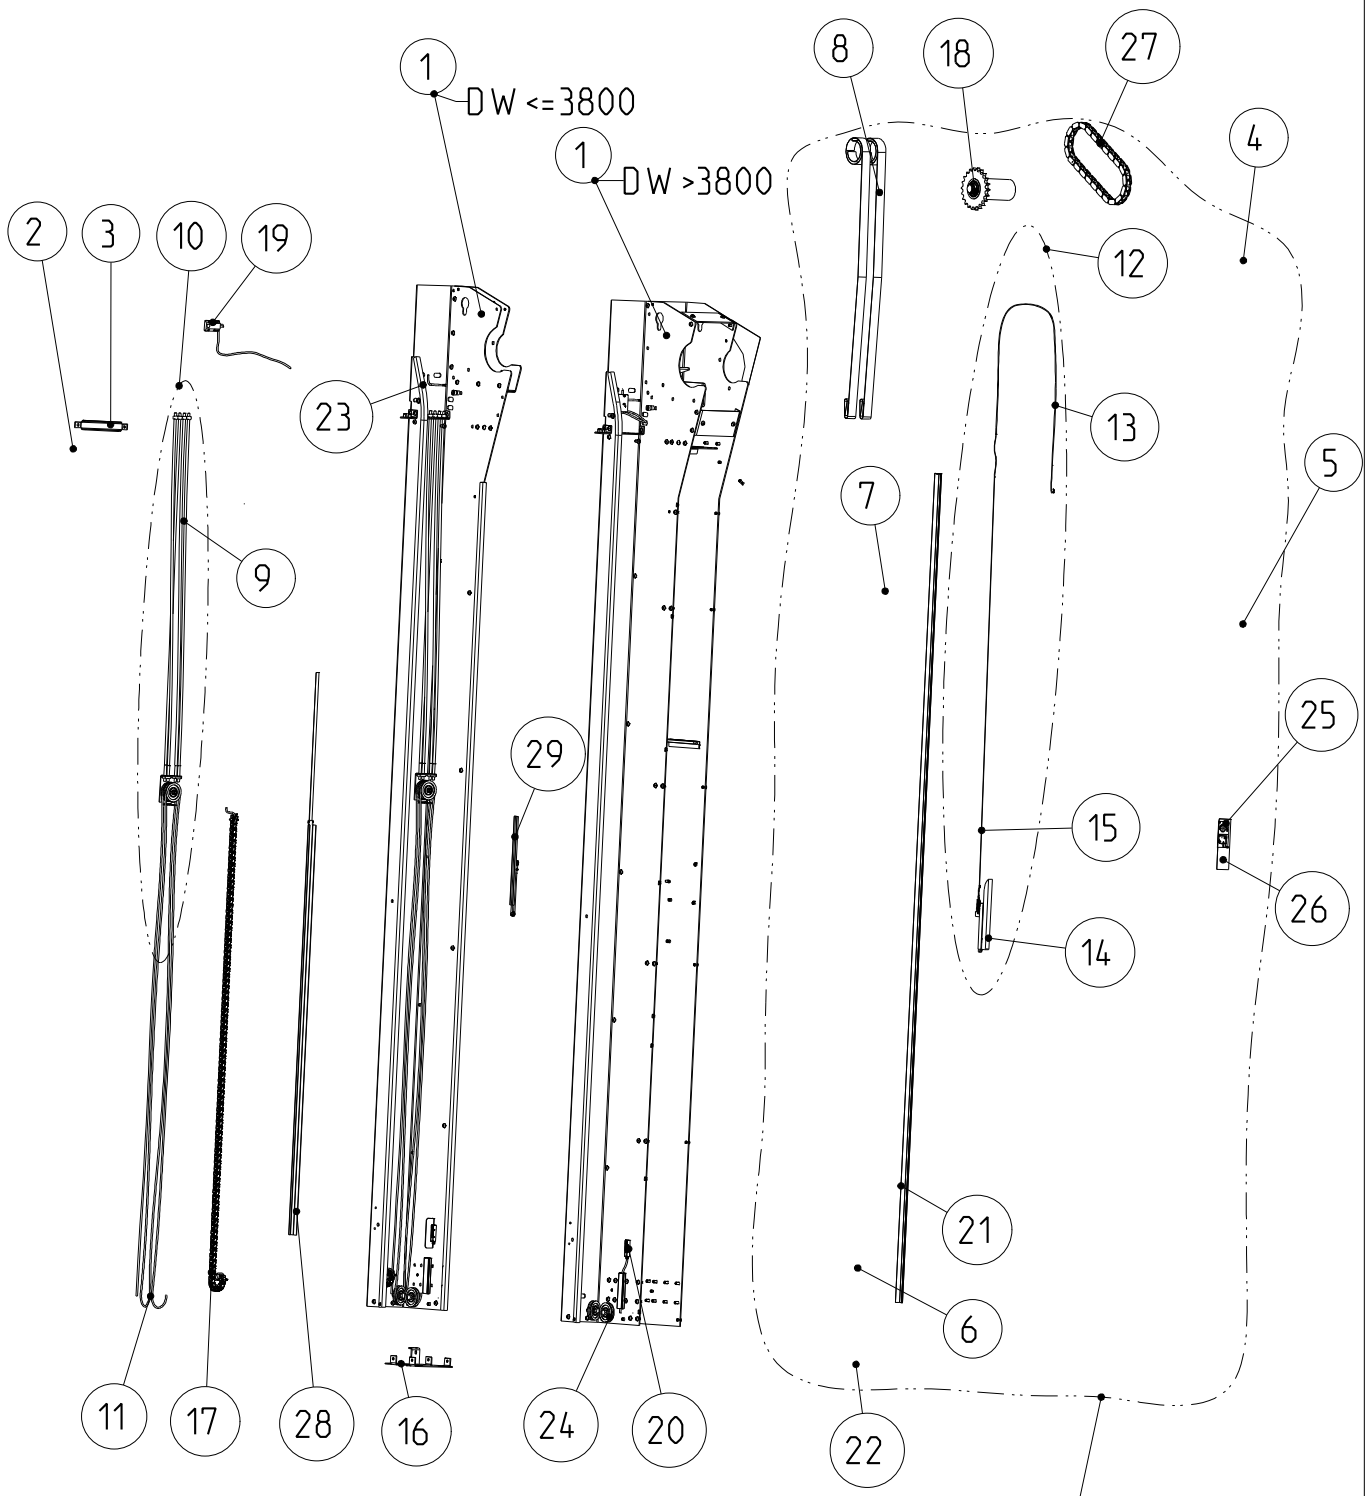

8220RG255	Rev.: g	Sheet: 7 of 7


ALBANY
ASSA ABLOY

RR 3000R, Version 22

Pos. Item	Description	Bemerkung Note	gültig ab ▲ gültig bis ▲ valid from ▲ valid to	Art.-Nr. Item-No	1	Delivery time class	Einheit Unit	Anzahl pro Tor Quantity per door	Verschleißteil Wear part / Slitdetalje
I	**Side frame right Side frame left (mirror image)**								
1	Side frame RH compl.			D8220RG255	G	C	Stck./pc.	1	
	Side frame LH compl.			D8220RG256	G	C	Stck./pc.	1	
2	Guide cover RH			D8220RG261	G	C	Stck./pc.	1	
	Guide cover LH			D8220RG260	G	C	Stck./pc.	1	
3	Stiffener guiding cover			D4521R1323		A	Stck./pc.	2	
4	Spring cover top	W>3800		D4521R1326		C	Stck./pc.	1	
5	Spring cover bottom (side of bearing)			D4521RG213	G	C	Stck./pc.	1	
	Spring cover RH (side of drive unit)			D4521RG214	G	C	Stck./pc.	1	
	Spring cover LH (side of unit)			D4521RG215	G	C	Stck./pc.	1	
6	Tension spring L=600mm	H<=2000		D4802R0010		A	Stck./pc.	max 14	x
	Tension spring L=976mm	2000<H<=2500		D4802R0009		A	Stck./pc.	max 14	x
	Tension spring L=1397mm	2500<=H<3000		D4802R0007		A	Stck./pc.	max 14	x
7	Spring suspension top complete	3-Loch / 3-hole		D8220R0050		A	Stck./pc.	4	
	Spring suspension top complete	4-Loch / 4-hole		D8220R0051		A	Stck./pc.	4	
8	Belt (blue), L=6000			D5105R0081		A	Stck./pc.	4	x
10	Redirection rope with cable			D8120RG046	G	B	Stck./pc.	2	
11	Rope for curtain tension, L=8000			D5105R0031		A	Stck./pc.	2	
12	Emergency lever			D8220RG259	G	B	Stck./pc.	1	
16	Bottomplate RH			D4521R1321		A	Stck./pc.	1	
	Bottomplate LH			D4521R1320		A	Stck./pc.	1	
17	Cable Chain complete drive unit side	(*)		D8520RG013	G	B	Stck./pc.	1	
	Cable Chain complete non drive unit side	(*)		D8520RG014	G	B	Stck./pc.	1	
	Connecting cable 4m	drive side H<=2000		D4907R0024		A	Stck./pc.	1	
	Connecting cable 6m	drive side 2000<H<=4500 non drive side (H+W)<=4000		D4907R0029		A	Stck./pc.	1	
	Connecting cable 8m	non drive side 4000<(H+W)<=6000		D4907R0030		A	Stck./pc.	1	
	Connecting cable 10m	non drive side 6000<(H+W)<=8000		D4907R0032		A	Stck./pc.	1	
	Connecting cable 12m	non drive side 8000<(H+W)<=10000		D4907R0023		A	Stck./pc.	1	
	Connecting cable 14m	non drive side 10000<(H+W)		D4907R0031		A	Stck./pc.	1	
18	Belt shaft compl.			D8120R0057		A	Stck./pc.	2	
19	Proxmity switch M8 10E Plugconnector			D4905R0082		A	Stck./pc.	1	
	Connecting cable 2m with 2 M8 plugs	Drive side		D4907R0082		A	Stck./pc.	1	
20	Photocell transmitter without bracket - blue	RH		D4904R0547		A	Stck./pc.	1	
	Photocell receiver without bracket - black	LH		D4904R0548		A	Stck./pc.	1	
21	Cable Duct complete	L=2000		D8120R0049		A	Stck./pc.	4	
22	Spring Suspension			D4521R1266		A	Stck./pc.	8	
23	Sliding rail 3000 mm long			D4121R0335		A	Stck./pc.	6	x
24	Rope pulley			D5003R0001		A	Stck./pc.	8	
25	Label emergancy lever			D6403R0009		A	Stck./pc.	1	
26	Door label			D6403RG002	G	A	Stck./pc.	1	
27	Roller chain			D8120R0060		A	Stck./pc.	2	x
28	Guide cable chain compl.			D4721RG102	G	B	Stck./pc.	2	x

(*) Data of W, H and drive side is necessary

Panel Door Blade Type R	RR3000R
Paneelbehang Typ R	RR3000R

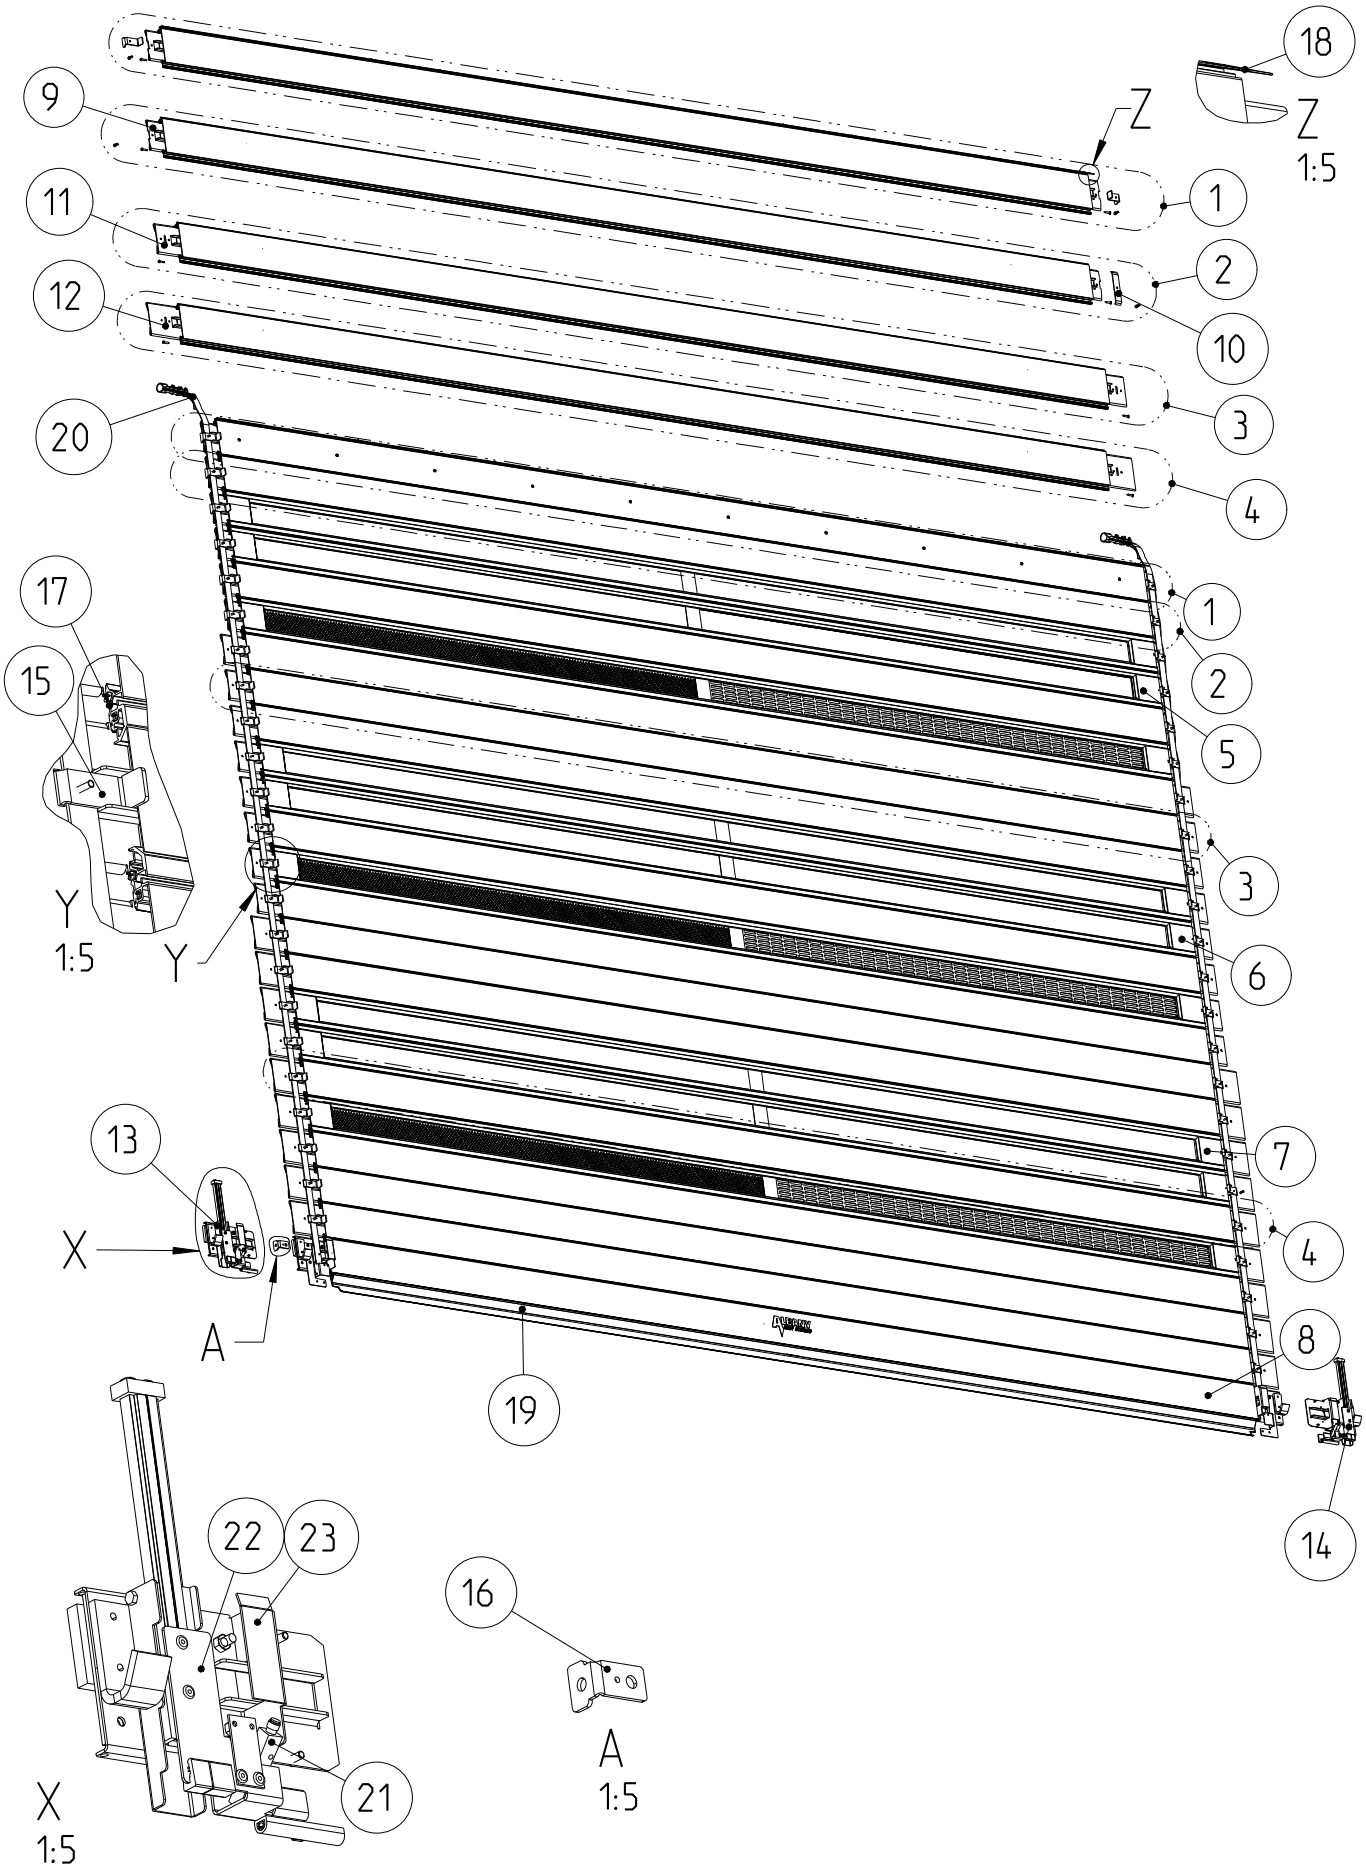


8230RG324	Rev.: C	Sheet: 4 of 4

ALBANY
ASSA ABLOY

RR 3000R, Version 22

Pos. Item	Description	Bemerkung Note	gültig ab ▲ gültig bis ▲ valid from ▲ valid to	Art.-Nr. Item-No	1	Delivery time class	Einheit Unit	Anzahl pro Tor Quantity per door	Verschleißteil Wear part / Slitdetalje
II	**Panel Door Blade R, Type 1**								
1	Top lamella R, with top sealing (*)			D8230RG390	G	B		1	
	without isolation						m		
	isolation with Polystyrol						m		
	isolation with mineral wool						m		
2	Lamella R1 with extension piece 1s R - short (*)			D8230RG388	G	B		max 5	
	without isolation						m		
	isolation with Polystyrol						m		
	isolation with mineral wool						m		
3	Lamella R2 with extension piece 2s R - middle (*)			D8230RG389	G	B		max 8	
	without isolation						m		
	isolation with Polystyrol						m		
	isolation with mineral wool						m		
4	Lamella 3 with extension piece 3s - long (*)			D8230RG386	G	B		max 9	
	without isolation						m		
	isolation with Polystyrol						m		
	isolation with mineral wool						m		
5	Window lamella W1 with extension piece W1 - short (*)			D8230RG440	G	B	m	max 4	
6	Window lamella W2 w. extension piece W2 - middle (*)			D8230RG441	G	B	m	max 8	
7	Window lamella W3 with extension piece W3 - long (*)			D8230RG442	G	B	m	max 8	
8.1	Bottom lamella (with rubber profile without extension piece 4s)	W <= 5000 (pre running photo cell)		D8230RG391	G	B		1	
	without isolation						m		
	isolation with Polystyrol						m		
	isolation with mineral wool						m		
8.2	Lamella bottom type 4a (with rubber profile, without extension piece 4s)	W > 5000 (pre running photo cell)		D8230RG437	G	B		1	
	without isolation						m		
	isolation with Polystyrol						m		
	isolation with mineral wool						m		
8.3	Lamella bottom with electr. safety edge (without extension piece 5s)	electr. safety edge		D8230RG392	G	B		1	
	without isolation						m		
	isolation with Polystyrol						m		
	isolation with mineral wool						m		
8.4	Lamella bottom with electr. safety edge and ext. seal (without extension piece 5s)	electr. safety edge		D8230RG393	G	B		1	
	without isolation						m		
	isolation with Polystyrol						m		
	isolation with mineral wool						m		
9	Extension piece 1s R, short	Standard lamella	2010-02 ►	D4521R1701		A	Stck./pc.	max 12	
	Extension piece W1, short	Window lamella		D4521R1999		A	Stck./pc.	max 8	
10	Support plate 1	W>3800,Std.lamella		D4521R1286		A	Stck./pc.	12	
11	Extension piece 2s R, middle	Standard lamella	2010-02 ►	D4521R1702		A	Stck./pc.	max 16	
	Extension piece W2, middle	Window lamella		D4521R2000		A	Stck./pc.	max 16	
12	Extension piece 3s, long	Standard lamella	2010-02 ►	D4521R1699		A	Stck./pc.	max 18	
	Extension piece W3, long	Window lamella		D4521R2001		A	Stck./pc.	max 16	
13	Extension piece 5s rh, for bottom lamella	el. safety edge, RH		D8150R0103		A	Stck./pc.	1	
	Extension piece 4s re, for bottom lamella	pre running photocell RH (**)	►2011-08 See Pos.21 2011-09 ► also single	D8150R0112		A	Stck./pc.	1	
14	Extension piece 4s li, for bottom lamella	pre running photocell LH (**)		D8150R0113		A	Stck./pc.	1	
	Extension piece 5s lh, for bottom lamella	el. safety edge, LH		D8150R0104		A	Stck./pc.	1	

Panel Door Blade Type R	RR3000R
Paneelbehang Typ R	RR3000R

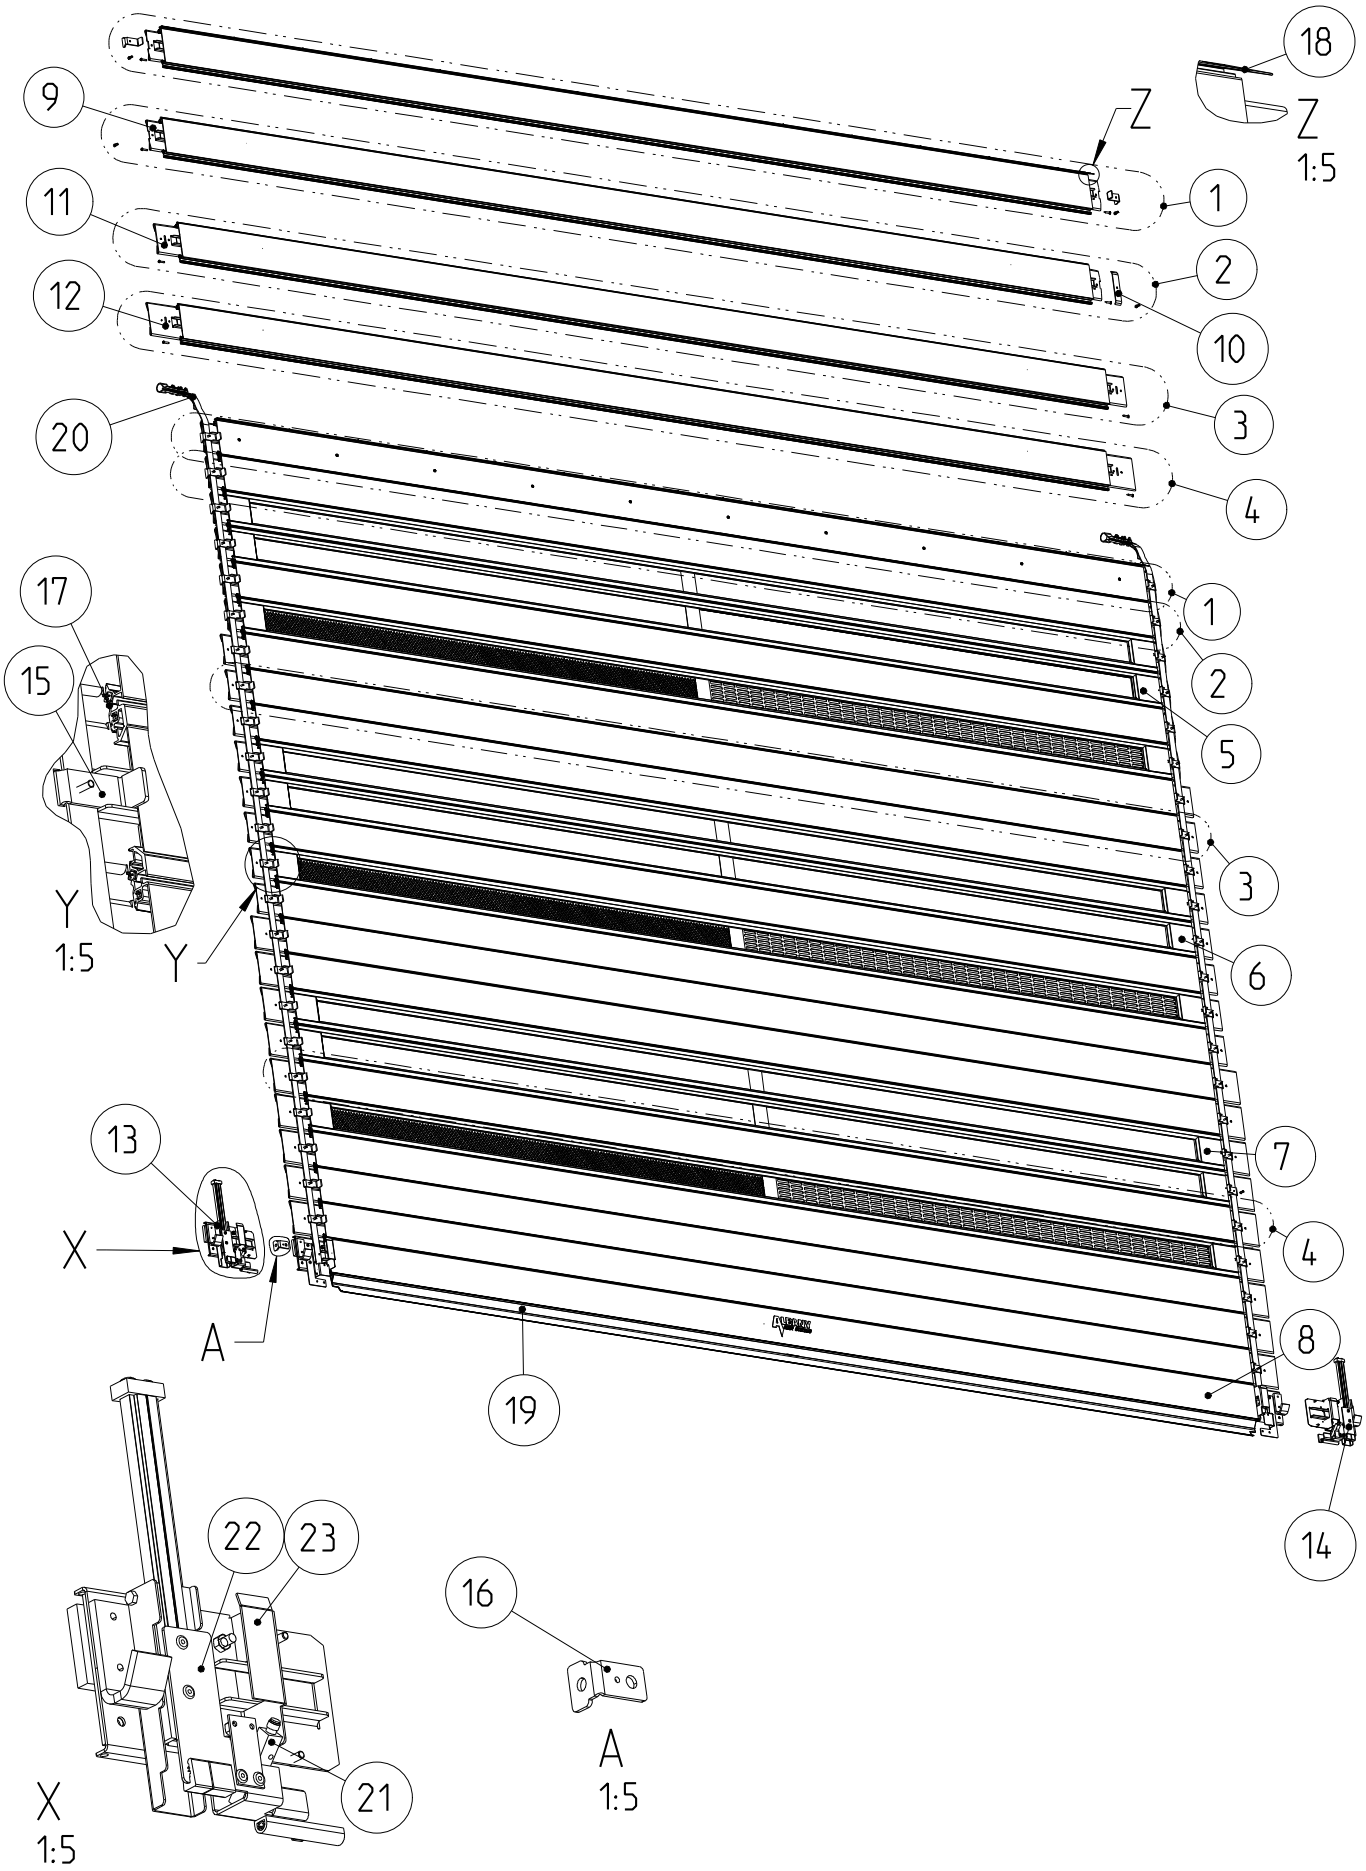

8230RG324	Rev.: C	Sheet: 4 of 4

ALBANY
ASSA ABLOY

RR 3000R, Version 22


Pos. Item	Description	Bemerkung Note	gültig ab ▲ gültig bis ▲ valid from ▲ valid to	Art.-Nr. Item-No	1	Delivery time class	Einheit Unit	Anzahl pro Tor Quantity per door	Verschleißteil Wear part / Slitdetalje
15	Clamping lug standard	Standard lamella		D4521R0966		A	Stck./pc.	max 46	
	Clamping lug Window lamella	Window lamella		D4521R1915		A	Stck./pc.	max 40	
16	Clamping lug extension piece 4	H>3250		D4521R1028		A	Stck./pc.	max 2	
17	Lamella sealing			D4402RG005	G	A	m	140	
18	Sealing top lamella			D4421RG011	G	B	m	6	
19	Bottom rubber profile	pre running photocell		D4402RG006	G	B	m	1	
	Rubber profile extended sealing lip cut-to-size			D4421RG016	G	C	m	1	
	Rubber profile with integrated safety edge	el. safety edge		D4421RG043	G	B	m	1	
	Rubber profile elongated sealing-lilp			D4421RG044	G	C	m	1	
20	Flat belt set 3000R compl.	2 compl. belts (rh / lh) for all door sizes		D8240R0021		A	Stck./pc.	1	x
	Add on belt 3000R set	retrofit old doors	►2010-12	D8240R0025		A	Satz/Set	1	x
	Flat belt L 6000 mm	Not f. compl. belt exchange		D4121R0299		B	Stck./pc.	max 2	x
21	Safety photocell receiver - grey	RH (**)	►2011-08 just in pair 2011-09 ► also single	D4904R0546		A	Stck./pc.	1	
	Safety photocell transmitter - red	LH (**)		D4904R0544		A	Stck./pc.	1	
22	Bracket pre running photocell RH			D4521R0943		A	Stck./pc.	1	
	Bracket pre running photocell LH			D4521R1023		A	Stck./pc.	1	
23	Activator Proximity switch RH			D4521R0981		A	Stck./pc.	1	
	Activator Proximity switch LH			D4521R0982		A	Stck./pc.	1	
24	Edge cover window C	2pc./window lamella		D4721R0291		A	Stck./pc.	max 40	
25	Flat belt repair-kit	2 belts (1000mm) with clamping parts		D8130R0011		A	Stck./pc.		
26	Adapter kit top 3000R			D8130R0042		A	Stck./pc.		

Description RH and/or LH see legend

(*) Inclusive lamella seal (position 17), clamping lug (pos.15) and screws

(**) Doors ordered before end of 2011/08 needs a pair of Transmitter/Receiver (Pos.21)

Barrel R complete	RR3000R
Wickelwelle R komplett	RR3000R
Vals R komplett	RR3000R

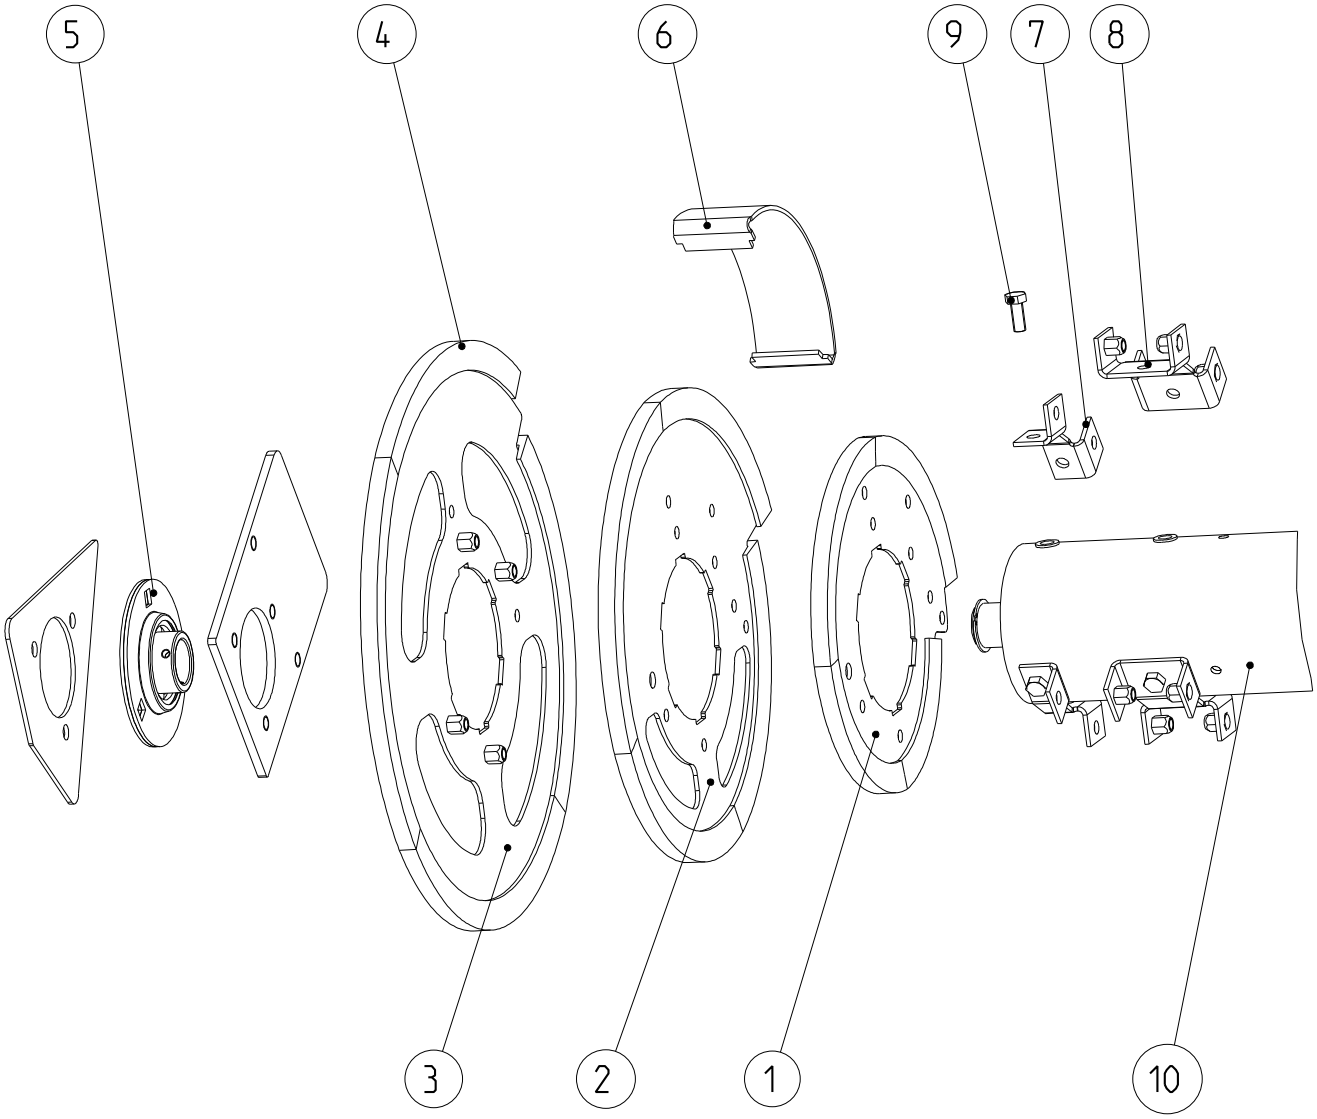

ALBANY
ASSA ABLOY


RR 3000R, Version 22

Pos. Item	Description	Bemerkung Note	gültig ab ▲ gültig bis ▲ valid from ▲ valid to	Art.-Nr. Item-No	1	Delivery time class	Einheit Unit	Anzahl pro Tor Quantity per door	Verschleißteil Wear part / Slitdetalje
III	**Barrel complete with Door blade**								
	Top roll with door blade RR3000R complete (*)	Transport pallet cpl. included		D8240RG170	G	D		1	
		Base price					Stck./pc.		
		Upcharge					m^2		
	Barrel complete			D8240RG113	G	D		1	
		Base price					Stck./pc.		
		Upcharge					m		
1	Spiral disk R1			D4521R1242		A	Stck./pc.	2	
2	Spiral disk R2			D4521R1243		A	Stck./pc.	2	
3	Spiral disk R3 LH	H>1875		D4521R1318		A	Stck./pc.	1	
	Spiral disk R3 RH	H>1875		D4521R1319		A	Stck./pc.	1	
4	Dampener disks, L=2000mm			D8140R0072		A	Stck./pc.	6	X
5	Bearing d 35			D8140R0065		A	Stck./pc.	2	X
6	Winding plate R			D4521R1271		A	Stck./pc.	2	
7	Angel disc 1			D4521R1179		A	Stck./pc.	max 4	
8	Bracket disc 3			D4521R1167		A	Stck./pc.	max 4	
9	Hexagon screw M8x20 Scotch grip			D5402R0378		A	Stck./pc.	max.42	

Description RH and/or LH see legend

(*) Data of W, H and drive side is necessary

Drive unit complete	RR3000R
Antrieb komplett	RR3000R

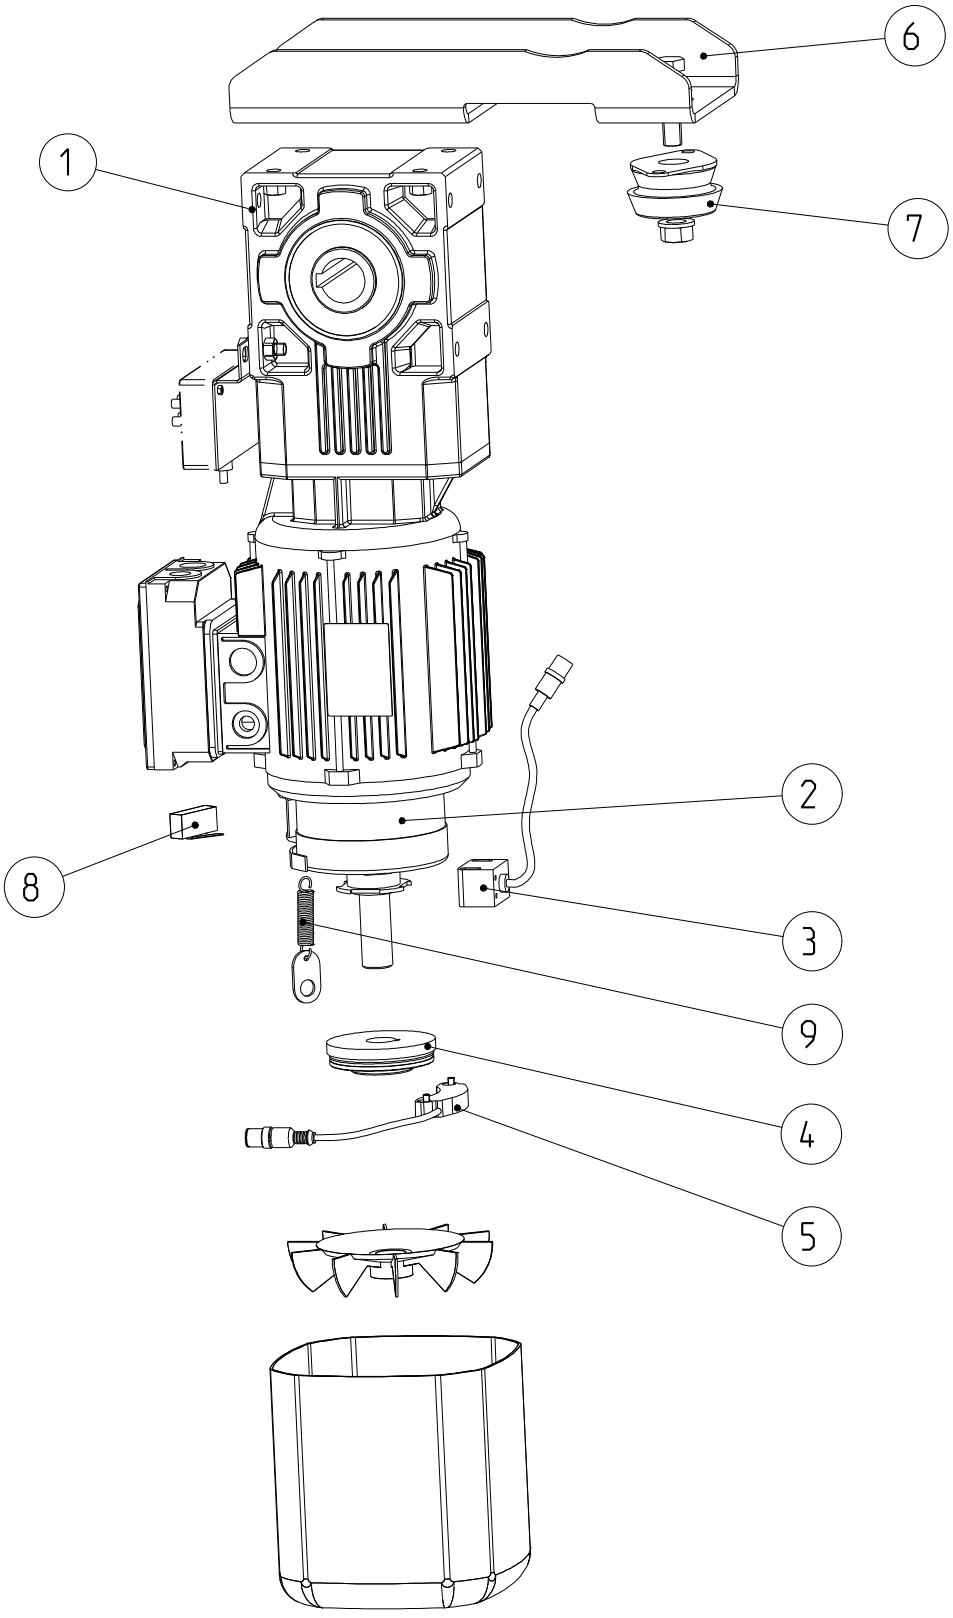


ALBANY
ASSA ABLOY

RR 3000R, Version 22

Pos. Item	Description	Bemerkung Note	gültig ab ▲ gültig bis valid from ▲ valid to	Art.-Nr. Item-No	1	Delivery time class	Einheit Unit	Anzahl pro Tor Quantity per door	Verschleißteil Wear part / Slitdetalje
IV	**Drive unit complete**								
1	Gear motor 220-230 / 400-415 V, ACS80			D8910R0054		B	Stck./pc.	1	
	Gear motor 220-230 / 400-415 V, MCC			D8910R0081		B	Stck./pc.	1	
2	Brake 10Nm 196V DC HL			D6622R0017		A	Stck./pc.	1	x
3	Double Proximity switch	ACS 80		D4905R0019		A	Stck./pc.	1	
4	Encoder 50 pulses compl. with bracket	MCC		D8410R0066		A	Stck./pc.	1	
5	Encoder, only electronic part	MCC		D4904R0450		A	Stck./pc.	1	
6	Motor plate			D4521R1290		A	Stck./pc.	1	
7	Vibration absorber			D5004R0041		A	Stck./pc.	1	x
8	Microswitch			D6621R0002		A	Stck./pc.	1	
9	Spring 2,2x11x48			D4802R0004		A	Stck./pc.	1	
10	Cable 4x0,25 6,5m GY (*)	SL<=5m		D4907R0110		A	Stck./pc.	1	
	Cable 4x0,25 11,5m GY (*)	5m<SL<=10m		D4907R0111		A	Stck./pc.	1	
	Cable 4x0,25 21,5m GY (*)	10m<SL<=20m		D4907R0112		A	Stck./pc.	1	
	Cable 4x0,25 31,5m GY (*)	20m<SL<=30m		D4907R0113		A	Stck./pc.	1	
11	Junctionbox 9plug 6,5m cable (*)	SL<=5m		D4906R0027		A	Stck./pc.	1	
	Junctionbox 9plug 11,5m cable (*)	5m<SL<=10m		D4906R0028		A	Stck./pc.	1	
	Junctionbox 9plug 21,5m cable (*)	10m<SL<=20m		D4906R0029		A	Stck./pc.	1	
	Junctionbox 9plug 31,5m cable (*)	20m<SL<=30m		D4906R0030		D	Stck./pc.	1	
12	Control cable	ACS 80		D8830RG042	G	B		1	
		Base price					Stck./pc.		
		Upcharge					m		
	Control cable	MCC		D8903RG145	G	B		1	
		Control close to drive					Stck./pc.		
		Control wall mounted					Stck./pc.		

(*) SL = control cable length

RR3000 R	
RR3000 R	
-	

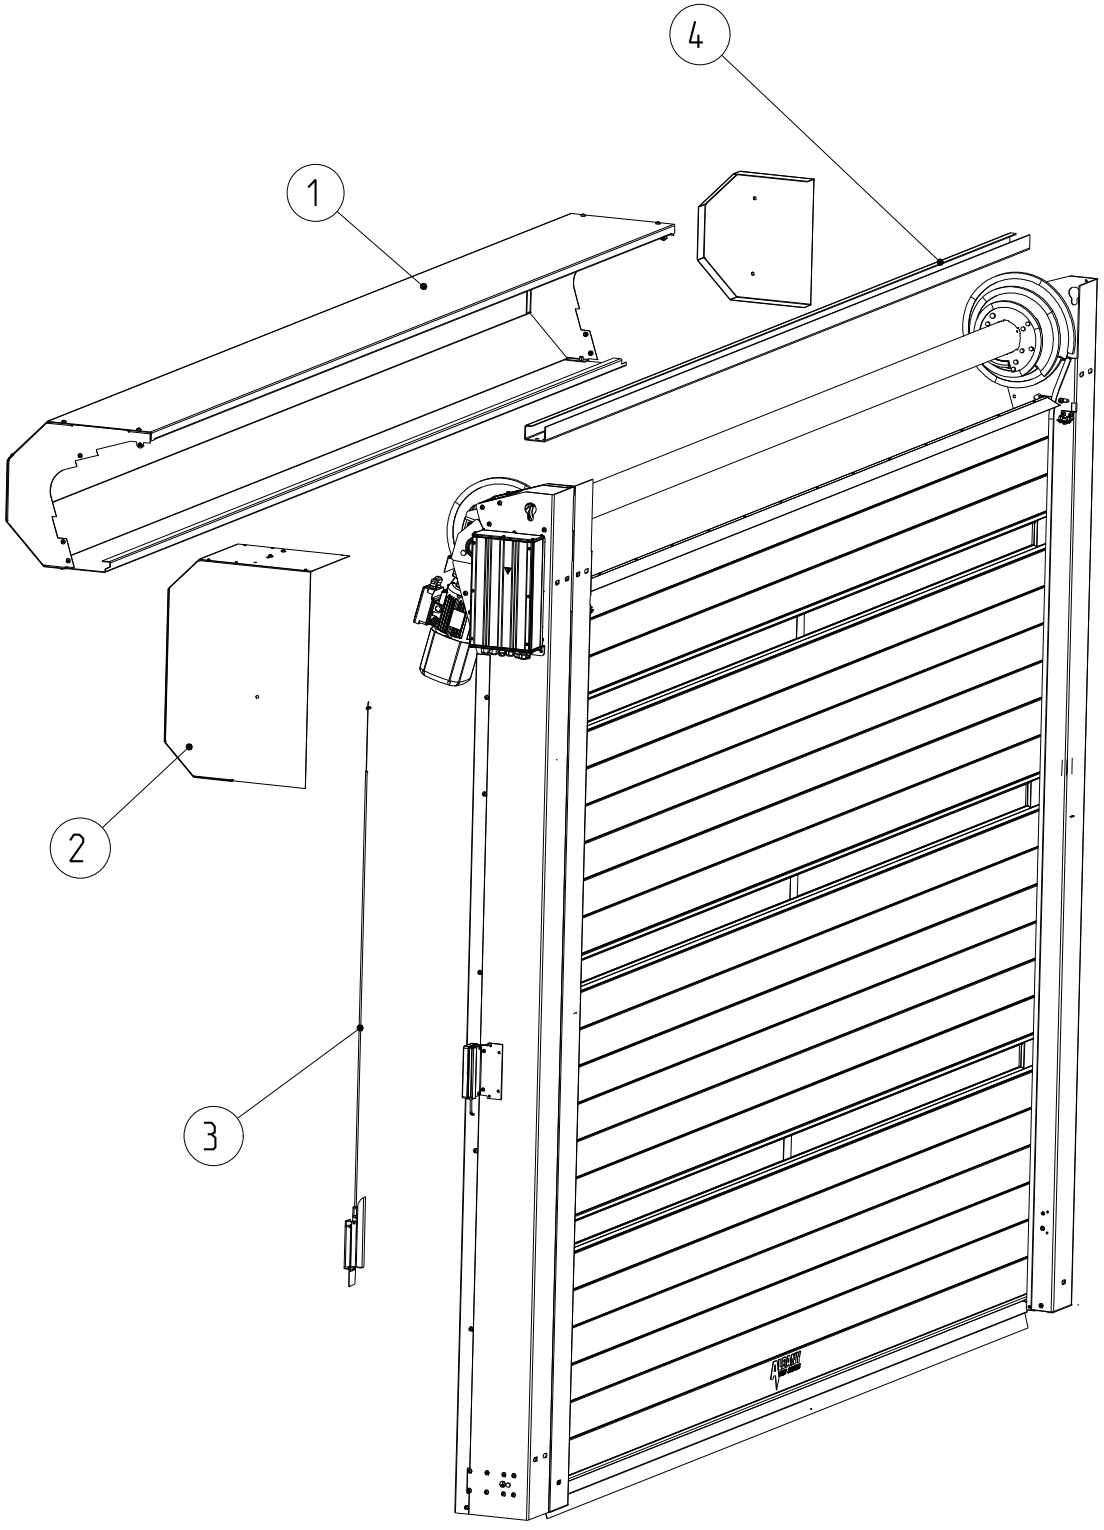

ALBANY
ASSA ABLOY

RR 3000R, Version 22

Pos. Item	Description	Bemerkung Note	gültig ab ▲ gültig bis valid from ▲ valid to	Art.-Nr. Item-No	1	Delivery time class	Einheit Unit	Anzahl pro Tor Quantity per door	Verschleißteil Wear part / Slitdetalje
V	**Options**								
1	Top roll cover			D8260RG006	G	C		1	
		Base price					Stck./pc.		
		Upcharge					m		
2	Motor cover RH	ACS 80, MCC wall mounted		D8160R0052		A	Stck./pc.	1	
	Motor cover LH	ACS 80, MCC wall mounted		D8160R0051		A	Stck./pc.	1	
	Motor cover RH	MCC side frame mounted		D8160R0067		A	Stck./pc.	1	
	Motor cover LH	MCC side frame mounted		D8160R0068		A	Stck./pc.	1	
3	2. emergency lever (option)			D8170RG022	G	B	Stck./pc.	1	
4	Lintel profile			D4521RG104	G	C	Stck./pc.	1	
	Transport pallet cpl.	for dismountling top roll		D8270RG032	G	B	Stck./pc.	1	
	Transport pallet cpl. special	gas treated; for dismountling top roll		D8270RG033	G	C	Stck./pc.	1	

SL= control line

H, L => [mm]

	Legend
	1
G	Generic Item
	Delivery time
A	Within 24 hours
B	2-3 Workdays
C	5-8 Workdays
D	10-14 Workdays
	Wear parts
	x = Standard wear with time/use

