


QUANTITY- 02 NOS

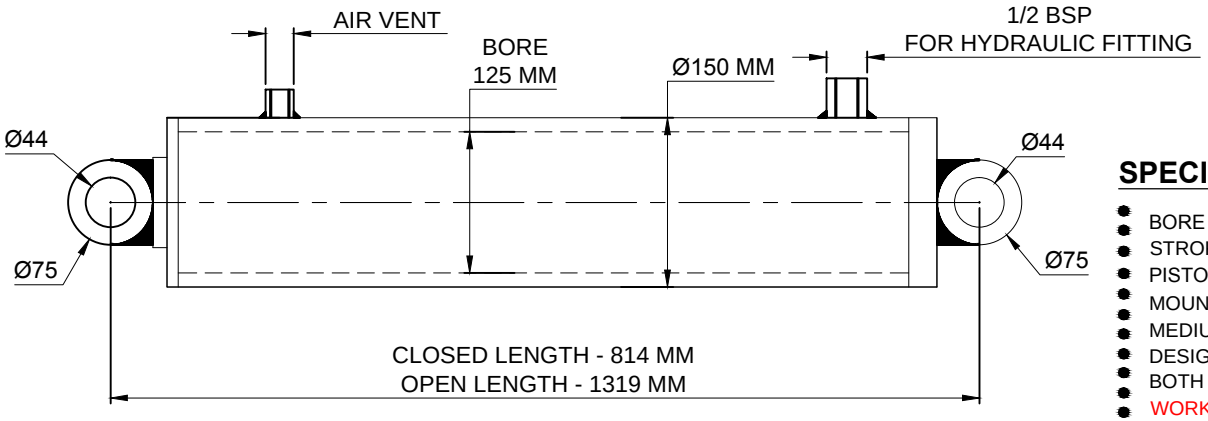

SPECIFICATION :-

- BORE :- Ø125 mm
- STROKE :- 505 mm
- PISTON ROD :-Ø80 mm
- MOUNTING :- WELDED TYPE BOTH END
- MEDIUM :- HYDRAULIC OIL
- DESIGN :-WELDED TYPE.(SINGLE ACTING)
- BOTH END PORT CONNECTION :- 1/2" BSP
- WORKING PRESSURE :- 200 BAR.
- OPERATING TEMPERATURE :-20 'C TO 100'C (DEPENDING ON SEAL)
- STROKE TOLERANCE :-0 TO +0.5mm

NOTE :
CYLINDER COATED WITH ONE COAT OF GRAY PRIMER AND ONE COAT OF PAMPAC GRAY PAINT

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE: LIFT CYLINDER				NIHVA TECHNOLOGIES PVT. LTD. PUNE Tel : 020 66304033 Email:- info@nihva.com Website:- www.nihva.com	
	NAME	SIGN	DATE		
DRAWN	P.A		16.11.2018	CLIENT -	
CHECK	R.D		16.11.2018	PROJECT -	
APPRD.	V.T		16.11.2018	SITE LOCATION -	
If any queries contact : design@nihva.com				DWG. NO. : NIHVA/18-19/VDR/211	REV- 0
ALL DIMENSION ARE IN mm				SCALE: NTS	WT: SHEET: 01 OF 01