



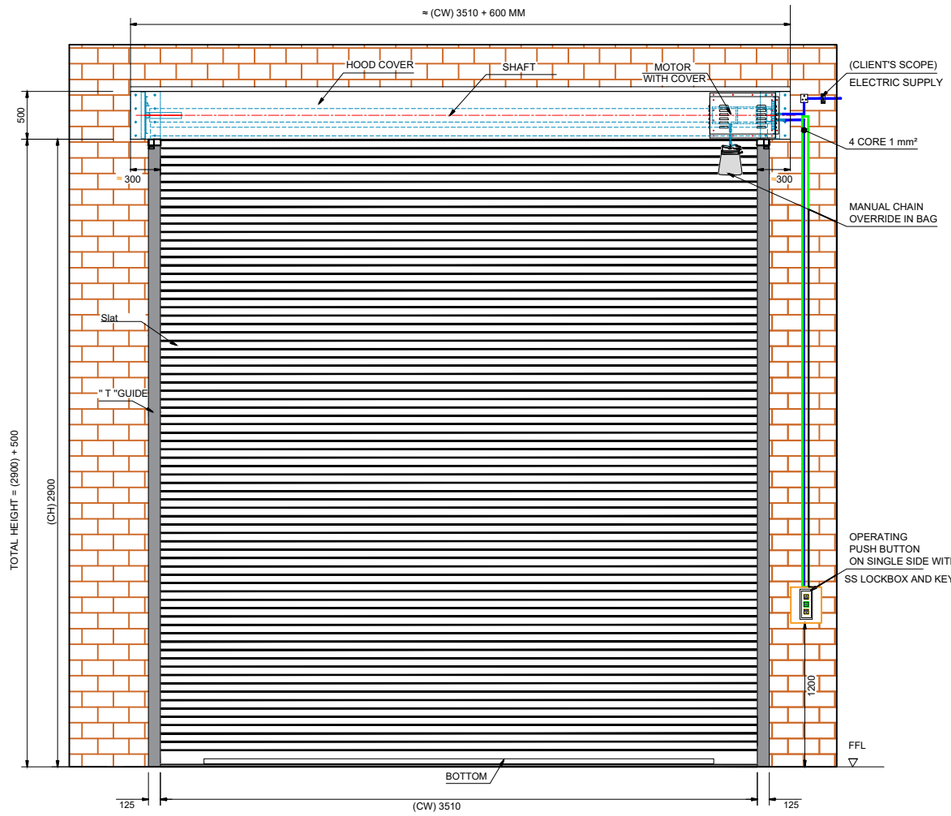

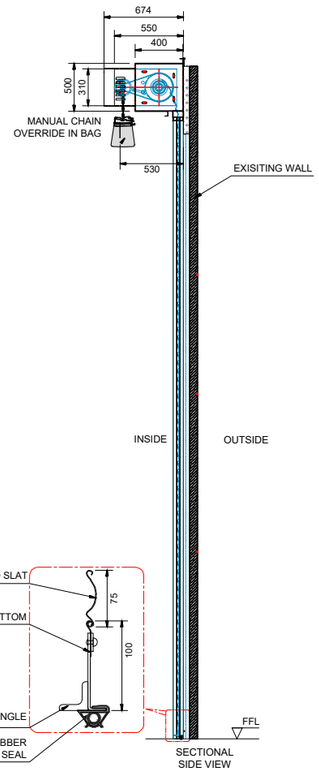

TECHNICAL SPECIFICATION:-

SR.	SPECIFICATION	DETAILS
1.	Description & Drive	Motorised Rolling Shutter (Indirect Drive) with Manual Chain Arrangment
2.	Location Area	Inside/Out side
3.	Mounting Surface	Side Brackets: Existing Wall With MS. tube
4.	Slat	Curved 75 mm GI Sheet - 1.2 mm Thk
5.	Bottom Profile	MS Plate 100 x 2.5 mm thick with Angle Stiffener with rubber seal
6.	Guide Profile	M.S." T " Shape profile 125 x 3.0 mm Thik.
7.	Hood Cover & Motor Cover	Made of GI Sheet Thickness 0.9 mm
8.	Motor	Swift roll make
9.	Colour	Ral 7000 (one coat of zinc chromate primer)
10.	Push Botton	3 Way Push Baton on Single Side

SHUTTER SIZES :-

SR.	CLEAR WIDTH	CLEAR HEIGHT	QTY.
01	3510 mm	2900 mm	01

Note :-

1. All Dimension are in mm
2. This drawing is only for understanding purpose

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE :- MOTORISED ROLLING SHUTTER

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

	NAME	DATE	
DRAWN	S.J.	05/10/2024	CLIENT - GABRIEL (CONSTRIX PVT.LTD)
CHECK & APPROVAL	V.T.	22/11/2024	PROJECT - MOTORISED ROLLING SHUTTER
			FORMAT NO - NIHVA-DD-F-03
			DWG. NO. : NIHVA/24-25/GB/2411001 — REV-00
			SCALE: NTS — WT: — SHEET: 01 OF 01

ALL DIMENSION ARE IN mm

If any queries contact : design@nihva.com