
DRAWING

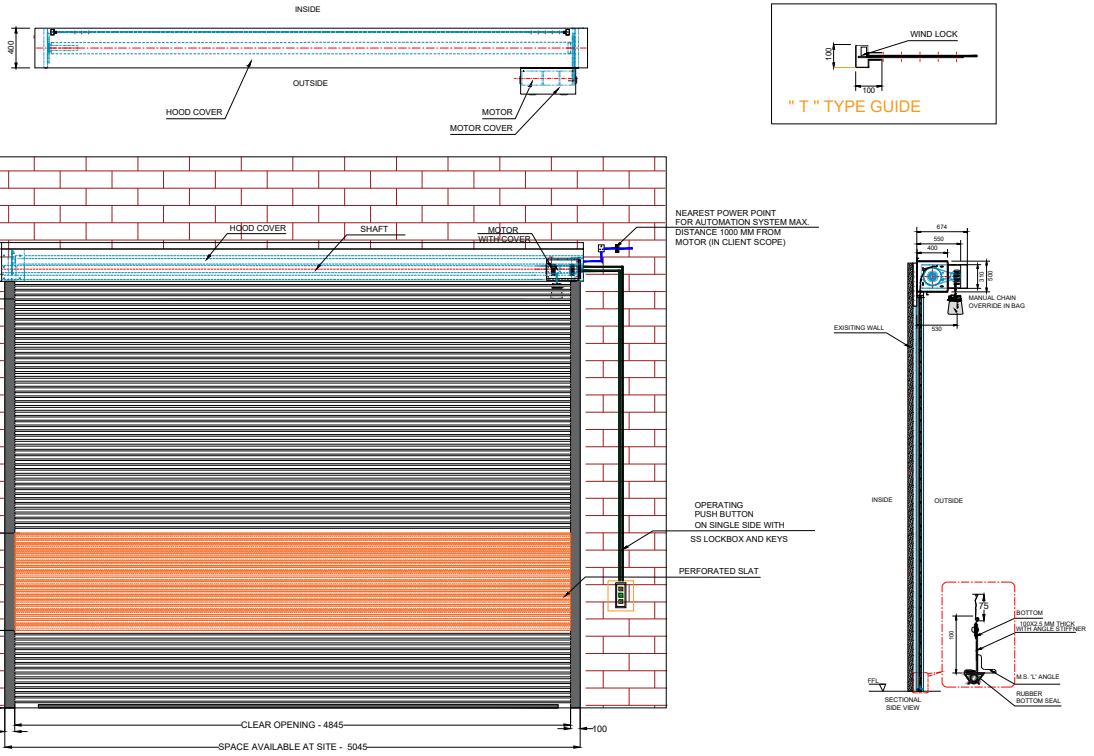

TECHNICAL SPECIFICATION:-

SR.	SPECIFICATION	DETAILS
1.	DESCRIPTION & DRIVE	MOTORIZED ROLLING SHUTTER (INDIRECT DRIVE)
2.	LOCATION AREA	OUTSIDE AREA
3.	MOUNTING SURFACE	SIDE BRACKETS: OPTIONAL = ON CONCRETE/STEEL&SIDE
4.	SLAT	GI SLAT- 1 MM THICK (75 MM WIDTH)
5.	BOTTOM PROFILE	MS PLATE100 x 2.5 MM THICK WITH ANGLE STIFFENER.
6.	GUIDE PROFILE	M.S." T " SHAPED PROFILE 100X3 MM THICK.
7.	HOOD COVER & MOTOR COVER	MADE OF GI SHEET THICKNESS 0.9 MM.
8.	RAL COLOUR	CONFIRM BY CLIENT RAL COLOUR
9.	PUSH BOTTON	3 WAY PUSH BUTTON ON SINGLE SIDE

SHUTTER SIZES :-

SR.	CLEAR WIDTH	CLEAR HEIGHT	QTY.
01	4845 mm	7400 mm	01

NOTE :

1. All DIMENSIONS ARE IN MM.
2. REQUIRED STEEL STRUCTURE IN CLIENT SCOPE.

SPECIAL INSTRUCTION'S :

CONSIDERING THE LARGE DOOR SIZE (7400X4850 MM) & THE INCREASED CLEAR HEIGHT,THE DOOR WILL BE EXPOSED TO HIGHER WIND PRESSURE.TO ENSURE SAFE,SMOOTH,& RELIABLE OPERATION OVER ITS SERVICE LIFE, THE FOLLOWING MEASURES ARE RECOMMENDED:

1) PERFORATED SLAT IS RECOMMENDED BETWEEN THE SHUTTER TO PROVIDE ADDITIONAL STRENGTH & STABILITY DOOR.
2) SAFETY CATCH ARRANGEMENT NEED TO CONSIDERED TO PREVENT ACCIDENT IN CASE OF FAILURE IN DRIVE SYSTEM, ENSURING MAXIMUM SAFETY TO PERSONNEL & EQUIPMENT.

TITLE - DOOR AUTOMATION

DWG NO - NTPL- 327

NIHVA Technologies Pvt. Ltd.

NIHVA TECHNOLOGIES PVT.LTD.PUNE
Website - www.nihva.com

	NAME	SIGNATURE	DATE		
DRAWN	B.S.		06-02-2026	PRODUCT - MOTORIZED ROLLING SHUTTER	
CHK'D	V.T.		06-02-2026	PROJECT NO - NTPL- 327	REVISION - 00
APPV'D	V.T.		06-02-2026	SITE LOCATION - PUNE	WEIGHT -
				MATERIAL -	QTY -01
IF ANY QUERIES CONTACT - Design2@nihva.com				PROJECTION METHOD	SCALE :
ALL DIMENSIONS ARE IN 'MM'			A2		SHEET 1 OF 1