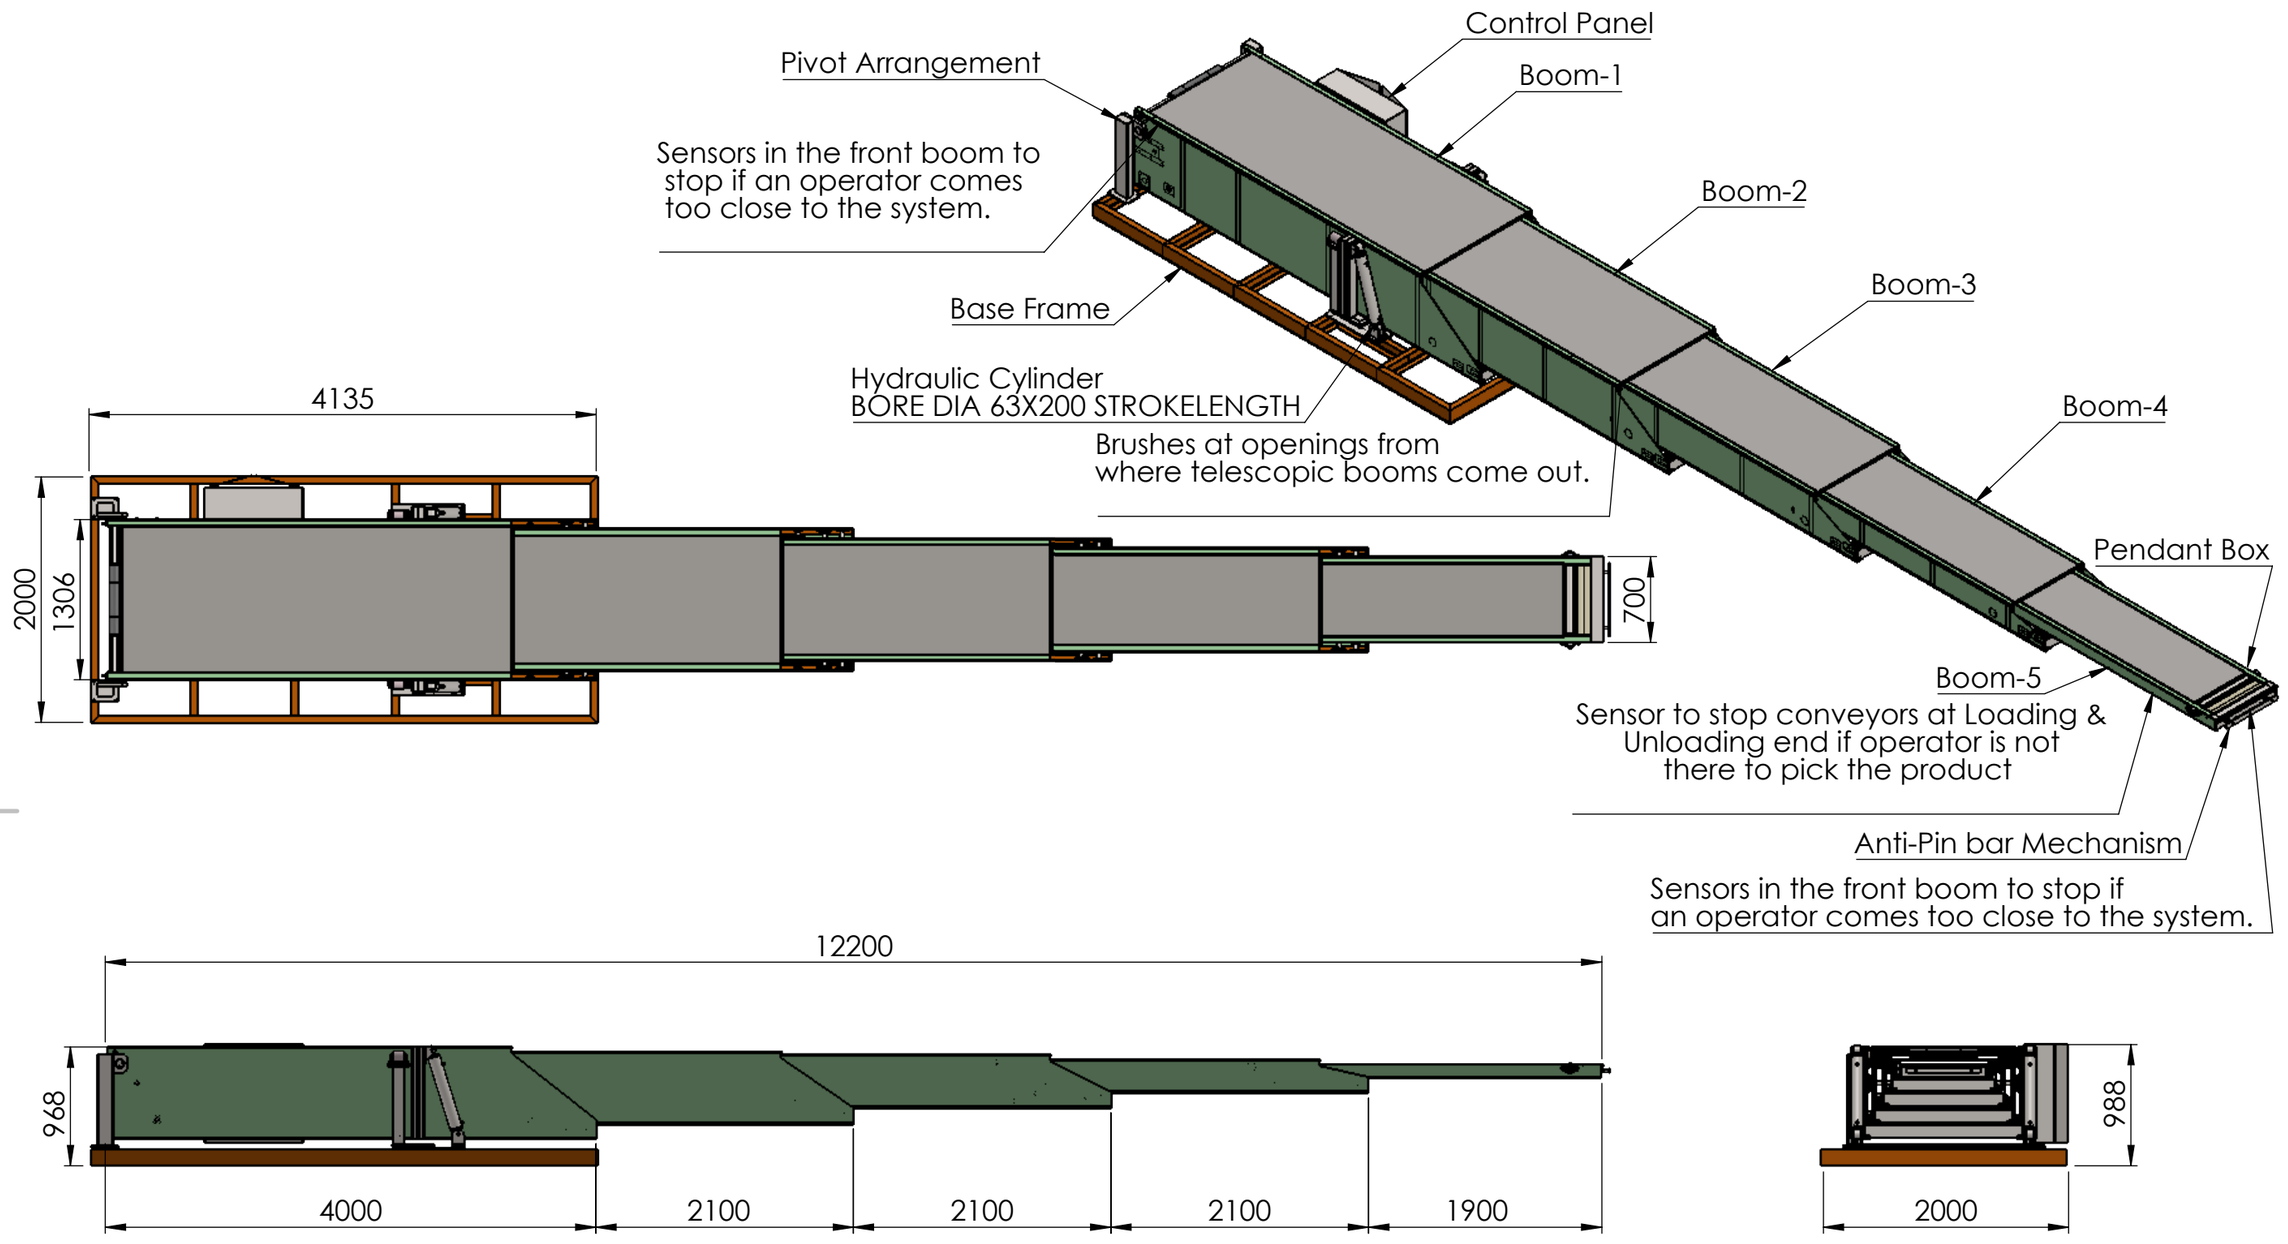


NOTE

1. For belt operation-4Kw Geared motor with Encoder is used-(SEW-Make)
2. For Telescopic operation_2 Kw geared motor is used- (SEW-Make)
3. MOC- MS
4. Belt Width-500mm
5. Angle of inclination-4 Deg
6. Type- Fixed Type
7. Quantity- 12 Nos

Use Tolerance as per ISO-2768 part 1&2:1989

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:	FINISH: POWDER COATING		DEBURR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION
				NIHVA TECHNOLOGIES PVT LTD Email:-info@nihva.com Website:-www.nihva.com	
	NAME	SIGNATURE	DATE	TITLE: TELESCOPIC CONVEYOR	
DRAWN	ROHIT				
CHK'D	SHAILENDRA				
APPV'D	VT				
MFG					
Q.A					
			MATERIAL: MS	DWG NO. NIHVA20_21_ATS_TC_001	A3
			WEIGHT: GMS	SCALE:1:100	SHEET 1 OF 1