



Position:
Control SYSTEM
MCC

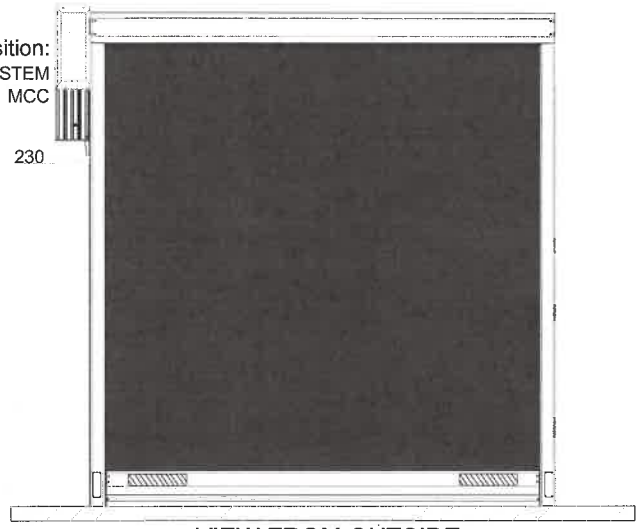

VIEW FROM OUTSIDE

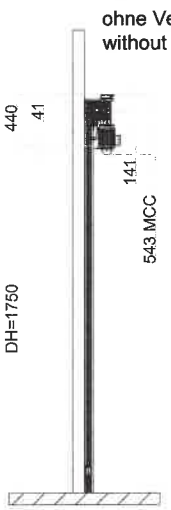


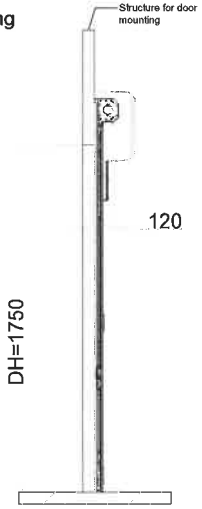

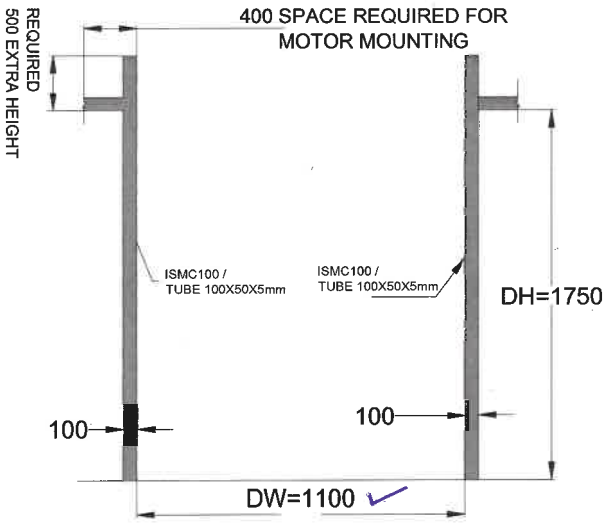


Prinzipzeichnung RapidProtect RP300


General drawing Rapid Protect RP300

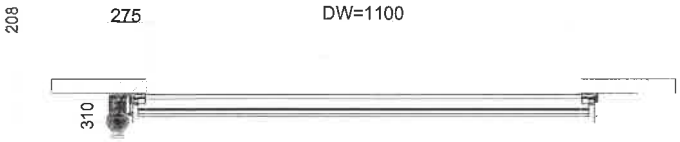

ohne Verkleidung
without cover



mit Verkleidung
with cover

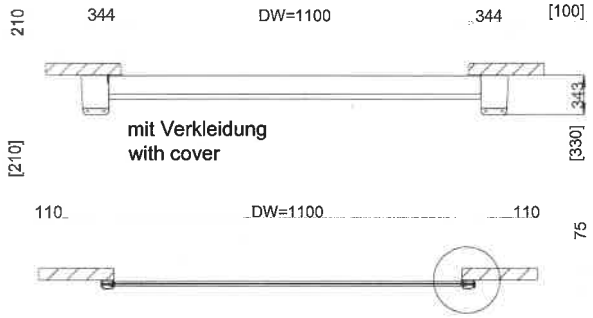

mit Verkleidung
with cover

1) Door mounting to vertical frame.

2) Door open condition - 1750 mm from bottom of rubber bead.

3) Window not required.



4) Motor & control panel box to be mount on RH side of the Door.

5) All cables should be 5 mtrs.

As per Faurecia standard.

CURTAIN:-ROLLTEX
RAL : 7001 GREY

DiFACTO APPROVED
Prpd. By : for. Ranjane J.
Aprd. By :
Date : 15/11/21.

CLEAR WIDTH(DW)	CLEAR HEIGHT(DH)	QTY
1100mm	1750mm	01 NO

Toleranz ±3 mm (gültig für alle Maßangaben) Tolerance ±3 mm (for all dimensions)
Maßangaben in [ ] ==> Montagefreiraum Dimensions in [ ] ==> clearance for installation

NOTE-
1. REQUIRED STRUCTURE FOR WILL BE IN CLIENT'S SCOPE.
2. PLEASE CONFIRM THE MOUNTING OF CONTROL PANEL (LH OR RH).

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE	HIGH SPEED DOOR RP300 & STRUCTURE		
	NAME	SIGN	DATE
DRAWN	G.P.		03.11.21
CHECK	P.J.		03.11.21
APPV'ED	A.K.		03.11.21

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT :- DiFACTO Robotics and Automation
PROJECT :-
LOCATION :-Banglore
DWG. NO. :- NIHVA/21-22/0259 REV:- R01
If any queries contact : design@nihva.com
ALL DIMENSION ARE IN mm
SCALE: NTS WT: SHEET: 01 OF 01