NIHVA

Rolling Shutter





We Make Possible

NIHVA


PRODUCTS FEATURES:

- Maintaining highest safety standards.
- Finger-tp control to open and close shuters of any size with the utmost ease from a single push-buton switch or a radio remote control transmiter.
- Protectng against burglary, vandalism and storms.
- During power failure, the door can be operated manually using a hand crank or a chain drive.
- Safety Features Optonal: Electrical safety edge with rubber profile, Photo cell, Emergency stop buton.
- A wide range of accessories: Remote control & receiver, Key switch, Push buton, Rubber sealing, Flashing light.


Slat Profile


Perforated Slat


Indirect Drive


Direct Drive

Door type	**Rolling Shutter**
Clear Opening dimension	(W)..... x (H) ..... std. dimension or non.std. dimension
Opening Direction	Vertical - from bottom to Top
Mounting Location area	**Optional** = Inside area / Outside area
Mounting Surface	Side Brackets: Optional = On Concrete /Steel & Side
	Guides : Optional = On Concrete/Steel / Masonry
Opening/Closing Speed	0.1 m/sec
Wind Resistance	90 Km/hr
Door material	
Curtain material	**Optional** = MS / GI / SS / AL
Curtain Panel	The panel made of 1.0mm thick CRCA steel
Curtain panel size	75mm wide
Curtain Profile	**Optional** = Corrugation / Flat / Ribbed
Slat Thickness	0.9 mm to 1.2 mm (As per IS 6248)
Bottom Profile	M. S. Plate 100 mm x 2.5 mm thick with angle stiffener
	(**Optional** - Rubber Bottom Seal)
Side Guide Profile	M.S." U" Shaped profile 65 mm -200 mm x 3 mm thick
	(as per the opening width dimension)
Roller Shaft	M.S. Tubular Pipe with Flange & machined shaft at the ends
	Pipe Dia -100 to 300 mm as per w x h (**Optional** - Rubber Bottom Seal)
Side Brackets	MS Plate 3 mm to 10 mm thick , as per the opening dimension
Hood Cover	Made of GI Sheet Thickness 0.8 mm with 25x25x3mm angle stiffener
Surface finish	
Painting	2 Coats (each coat of 35 microns DFT) of EPOXY polyamide based enamel
	finish of approved color and make over a Coat (each one coat 25 microns DFT)
	of EPOXY polyamide based red oxide zinc phosphate primer
Options Available	Perforation in Slat Profile / Rolling Grill
Automation	
Control Type	**Optional** = Dead man / Pulse Control
Drive Unit & Mounting Type	**Option** 1) Electric Motor (Imported German Make) (Single Phase/Three Phase) - Direct Mounting on Shaft
	Option 2) Electric Motor (Imported China make) (single phase / three phase) - Indirect Mounting - Sprocket chain arrangement
Emergency Operation	**Option** = Manual Hand Driven / Chain Wheel Drive
Operating Switch	**Option** = Push Button from inside / or do you need Outside also
	Option = Push Button / Key Switch From Outside
Integration optional	**Option** = need to interlock or integrate with other door or machine or Equipment
Accessories	**Option** = Flashing Light / Door line Safety Photocell
	Option = Remote Control with receiver
Installation Constraint any	Need to be check = space requirements + substructure + Mounting access +
	Access in the event of power cut

The Insulated Roller shuters from NIHVA is perfectly suited to the opening where aesthetc is consern along with high security.

As the name Insulated Roller Shuter - Each slat is insulated with polyurethane foam, which helps to control the temperature and noise.

This shuters have high resistance to corrosion as the slats are constructed of precoated galvanised sheet while side Guides and Botom Profile are made up of extruded Aluminium.





NIHVA

SS/Transparent/Aluminium Rolling Shuters

Stainless Steel Rolling Shuters

NIHVA Stainless Steel Rolling shuters are constructed from high grade stainless steel material to suit the customer requirement.
This shuters are designed to provide security and maintain high level of hygienic environment corrosion free.

APPLICATIONS :- Food Industries, Pharma Industries, Hotels & Hospitals, Chemical Industries

Technical Overview	
Slat Material	SS 202 / 304 /316 as per the requirement
Slat thickness	0.7 to 1.0mm
Slat Profile	Corrogaton / Flat / Ribbed Perforaton available in all above profiles
Botom Profile	SS Plate with stfiner Optonal - Botom Rubber Sealing
Side Guide	SS Plate
Hood Cover	SS Plate
Brackets and Roller Shaf.	Mild steel
Surface Finish	Natural SS finish



Transparent Rolling Shuters



NIHVA Transparent rolling shuters are constructed from interlocking polycarbonate slats. This slats are provided with aluminium rod, which gives strength to the shuter. This shuters are designed to provide security and full visibility for display of products when the shuter is closed.

APPLICATIONS :- Shops & Malls, Showrooms, Parkings & Entrances

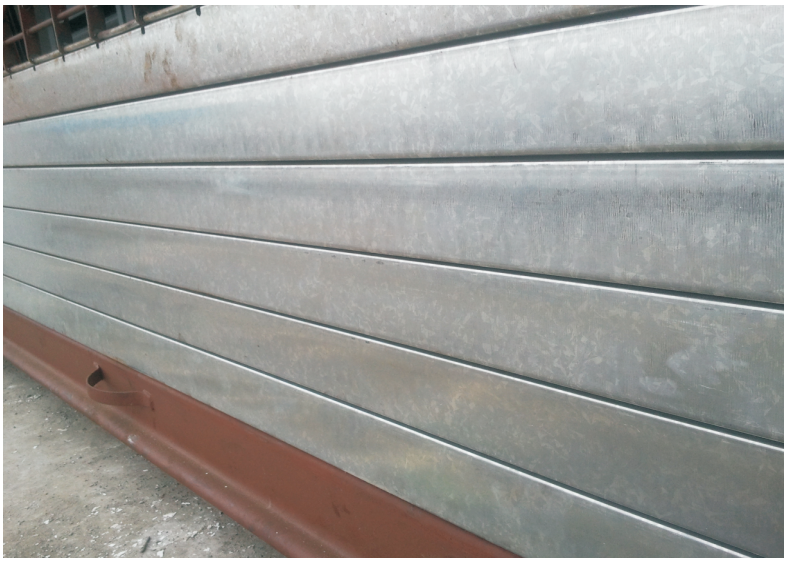
Technical Overview	
Slat Material	Polycarbonate with aluminium rod
Slat thickness	3.0mm (special thickness on request)
Slat Profile	Flat Type with Hinge
Botom Profile	Aluminum with Rubber Sealing
Side Guide	Galvanised Steel
Hood Cover	Galvanised Steel
Brackets and Roller Shaf.	Mild steel
Surface Finish	Paintng / Powder coatng

Aluminium Rolling Shuters

NIHVA Aluminium Rolling shuter are made up of extruded aluminium secton. This shuters are light in weight and give good aesthetc appearance. As the shuter is built up of Aluminium, this shuters are corrosion free.

APPLICATIONS :- Hotels, showrooms, Car parkings, Industries

Technical Overview	
Slat Material	Extruded Aluminium
Slat thickness	1.0mm to 1.2mm
Slat Profile	Single wall / Double wall
Botom Profile	Aluminium. Optonal - Botom Rubber Sealing
Side Guide	Galvanised Steel / Aluminium - Optonal
Hood Cover	Galvanised Steel / Aluminium - Optonal
Brackets and Roller Shaf.	Mild steel
Surface Finish	Powder coatng / Anodising / Paintng



NIHVA

SS/Transparent/Aluminium Rolling Shuters

Stainless Steel Rolling Shuters

NIHVA Stainless Steel Rolling shuters are constructed from high grade stainless steel material to suit the customer requirement.
This shuters are designed to provide security and maintain high level of hygienic environment corrosion free.

APPLICATIONS :- Food Industries, Pharma Industries, Hotels & Hospitals, Chemical Industries

Technical Overview	
Slat Material	SS 202 / 304 /316 as per the requirement
Slat thickness	0.7 to 1.0mm
Slat Profile	Corrogaton / Flat / Ribbed Perforaton available in all above profiles
Botom Profile	SS Plate with stfiner Optonal - Botom Rubber Sealing
Side Guide	SS Plate
Hood Cover	SS Plate
Brackets and Roller Shaf.	Mild steel
Surface Finish	Natural SS finish



Transparent Rolling Shuters



NIHVA Transparent rolling shuters are constructed from interlocking polycarbonate slats. This slats are provided with aluminium rod, which gives strength to the shuter. This shuters are designed to provide security and full visibility for display of products when the shuter is closed.

APPLICATIONS :- Shops & Malls, Showrooms, Parkings & Entrances

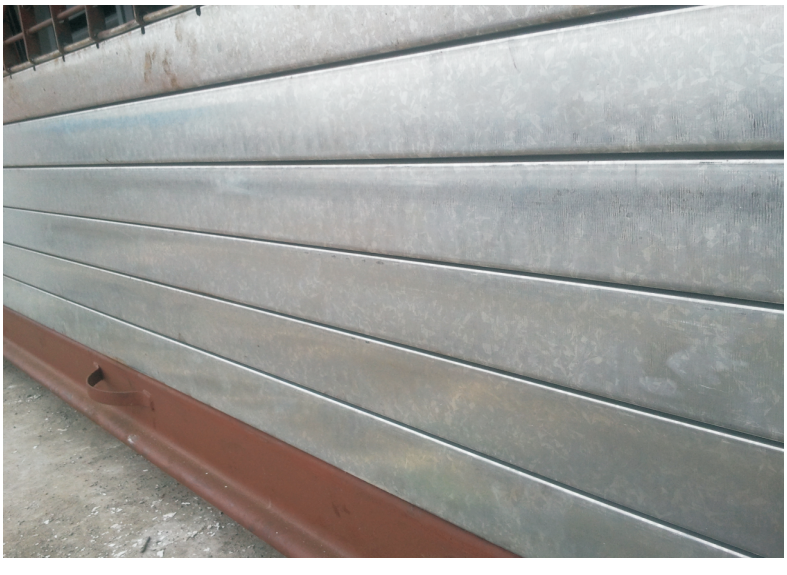
Technical Overview	
Slat Material	Polycarbonate with aluminium rod
Slat thickness	3.0mm (special thickness on request)
Slat Profile	Flat Type with Hinge
Botom Profile	Aluminum with Rubber Sealing
Side Guide	Galvanised Steel
Hood Cover	Galvanised Steel
Brackets and Roller Shaf.	Mild steel
Surface Finish	Paintng / Powder coatng

Aluminium Rolling Shuters

NIHVA Aluminium Rolling shuter are made up of extruded aluminium secton. This shuters are light in weight and give good aesthetc appearance. As the shuter is built up of Aluminium, this shuters are corrosion free.

APPLICATIONS :- Hotels, showrooms, Car parkings, Industries

Technical Overview	
Slat Material	Extruded Aluminium
Slat thickness	1.0mm to 1.2mm
Slat Profile	Single wall / Double wall
Botom Profile	Aluminium. Optonal - Botom Rubber Sealing
Side Guide	Galvanised Steel / Aluminium - Optonal
Hood Cover	Galvanised Steel / Aluminium - Optonal
Brackets and Roller Shaf.	Mild steel
Surface Finish	Powder coatng / Anodising / Paintng



NIHVA

We Make Possible

Automation Solutions	Material Handling Equipments	Door Automation
Pick & Place Machines	Dock Levellers	High speed doors / Sectional doors
Manipulator /Air Balancer	Scissor lifts / Mobile ramp	Sliding doors / Folding Doors
Wireless Automation (M2M)	Dock Shelters / Dock Seals / Dock House	Fire rated - Mot. Rolling shutters / Sliding doors
SPM	Goods Lift	Hanger Doors / Extra large opening doors
Automation Softwares	Spiral Conveyors / Belt Conveyors	Boom barriers / Turnstiles / Bollards
Grease / Oil Separator	Telescopic Conveyors	Sliding / Cantilever Gates

International Business Partners

ALBANY ASSA ABLOY | MEGADOOR ASSA ABLOY | Crawford ASSA ABLOY | besam ASSA ABLOY | ACO

Head Office: 187 / G-Block, 1st Floor, Thermax Chowk, MIDC, Above Renault Showroom, Chinchwad, Pune - 411019.

NIHVA

NIHVA Technologies Pvt. Ltd.

+91 2066 3040 33 +91 85 51091 333 sales@nihva.com www.nihva.com

NETWORKS

WEST	NORTH	SOUTH	EAST
Pune | Mumbai | Nashik | Nagpur Indore | Ahmedabad | Surat | Vadodara	Delhi | Chandigarh	Chennai | Hyderabad | Bengaluru	Kolkata | Bhubaneshwar