Nice

Robus 400/600/1000

For sliding gates up to 400 kg (RB400), **600 kg** (RB600) **and 1000 kg** (RB1000).

Also available in a KIT

Soon to be discontinued



RB400

RB600/RB1000

Versions with electromechanical limit switch (RB400/RB600/RB1000) and inductive limit switch (RB600P/RB1000P).

Simple: thanks to the BlueBUS system allowing connections with just two wires between the control unit and up to 7 pairs of photocells and control, safety and signalling devices.

Practical: control unit and PS124 buffer batteries (optional) connected by practical guided plug-in connector.

Advanced: RB400, RB600 and RB1000 are fitted with a temperature sensor that adapts the motor force to the climatic conditions while at the same time adjusting the thermal protection. A master/slave selection also automatically synchronises 2 motors, allowing automation of sliding gates with two opposing leaves.

Smart: thanks to obstacle detection and automatic programming of operating times. Self-diagnostics with indications via the flashing light. 8 programming levels.

Safe: adjustable acceleration and deceleration at the start and end of each manoeuvre.

Sturdy: release with aluminium handle for easy opening.

Quiet: gearmotor on bearings.

BlueBus

24V

BiDi

Yubii

Solemyo

Opera



Programmable via App

With Pro-View or Bidi-WiFi & MyNice Pro App, installing Nice Gate&Door systems is even easier and more convenient.

Find out more on page → 28

Code	Description	Pcs./Pallet
RB400	Non-reversible, 24 VDC, with integrated control unit, electromechanical limit switch, for gates up to 400 kg	15
RB600	Non-reversible, 24 VDC, with integrated control unit, electromechanical limit switch, for gates up to 600 kg	15
RB600P	Non-reversible, 24 VDC, with integrated control unit, inductive limit switch, for gates up to 600 kg	15
RB1000	Non-reversible, 24 VDC, with integrated control unit, electromechanical limit switch, for gates up to 1000 kg	15
RB1000P	Non-reversible, 24 VDC, with integrated control unit, inductive limit switch, for gates up to 1000 kg	15
RB400BDKCE	Kit for automating sliding gates up to 400 kg. 24 VDC, integrated control unit, with bidirectional technology	14
RB600BDKCE	Kit for automating sliding gates up to 600 kg. 24 VDC, integrated control unit, with bidirectional technology	14

The RB400BDKCE kit contains:

Code	Description	Quantity
RB400	Non-reversible electromechanical gearmotor, with built-in control unit and OXIBD plug-in bidirectional radio receiver for connection via Nice BlueBUS	1
MYGO4	4-channel 433.92 MHz transmitter	2
EPMB	Pair of surface mounted photocells with provision for connection via Nice BlueBUS	1
ELDC	Flashing LED light with integrated antenna	1
TS	Sign	1

The RB600BDKCE kit contains:

Code	Description	Quantity
RB600	Non-reversible electromechanical gearmotor, with built-in control unit and OXIBD plug-in bidirectional radio receiver for connection via Nice BlueBUS	1
MYGO4	4-channel 433.92 MHz transmitter	2
EPMB	Pair of surface mounted photocells with provision for connection via Nice BlueBUS	1
ELDC	Flashing LED light with integrated antenna	1
TS	Sign	1

N.B. The contents of the pack may vary: always consult the dealer.

COMMON ACCESSORIES

Code	Description	Pcs. Pack
RBA3	Spare control unit, for RB400, RB600/600P, RB1000/1000P and RUN1500/1500P	1
PS124	24 V battery with integrated battery charger	1
RBA1	Inductive limit switch	1
ROA6	Slotted rack, M4 25x20x1000 mm, nylon with metal insert. For gates up to 500 kg	10
ROA66	Slotted nylon rack M4 25x20x1000 mm with metal core and six clear fastening points. For gates weighing up to 800 kg	10
ROA7	Galvanised rack, M4 22x22x1000 mm	10
ROA8	Galvanised rack, M4 30x8x1000 mm, with screws and spacers	10
SYKCE	Solar power supply kit consisting of SYP photovoltaic panel and PSY24 battery box with charging control circuit	1
TS	Sign	1


Find out more on page → 130.

TECHNICAL SPECIFICATIONS


Code	RB400	RB600/600P	RB1000/1000P
ELECTRICAL SPECIFICATIONS			
Power supply (VAC 50/60 Hz)		230	
Draw (A)	1,1	2,5	2,3
Power (W)	250	515	450
PERFORMANCE DATA			
Speed (m/s)	0,34	0,31	0,28
Force (N)	400	600	900
Working cycle (cycles/hour)	35	40	50
DIMENSIONAL AND GENERAL DATA			
Protection class (IP)		44	
Operating temperature (°C Min/Max)		-20 ÷ +50	
Dimensions (mm)	330x195x277 h	330x210x303 h	
Weight (kg)	8	11	13

DIMENSIONS

RB400

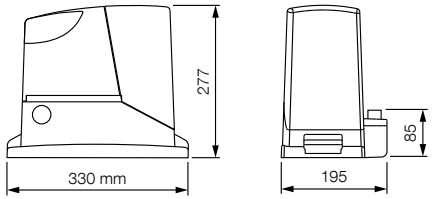

RB600/RB1000

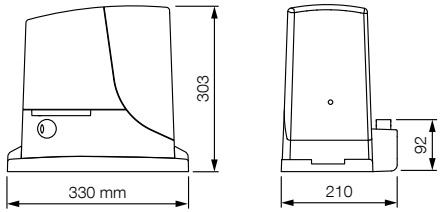

COMPATIBILITY WITH CONTROL SYSTEMS AND ACCESSORIES

RB400	RB600/600P	RB1000/1000P	
			Control unit/Receiver
			Integrated*
•	•	•	**OXIBD** / **OXILR**
			Transmitter
•	•	•	**ERA INTI** - 2 channels, 433.92 MHz, different colours
•	•	•	**ERA ONE** / **MYGO** - 1, 2, 4 or 9 channels, 433.92 MHz
•	•	•	**ERA ONE BD** / **MYGOBD** / **ERA ONE LR**
•	•	•	**ERA FLOR** / **DOMì**
			Photocells
			EPS - Slim / **EPM** - Medium / **EPL** - Large
•	•	•	**EPSB** - Slim, BlueBUS / **EPMB** - Medium, BlueBUS / **EPLB** - Large, BlueBUS
•	•	•	**EPMOR** - Medium, reflective
•	•	•	**EPMORB** - Medium, BlueBUS, reflective
•	•	•	**EPMOW** - Medium, wireless self-synchronised
			F210 - Synchronised, adjustable / **FT210** - For sensitive edges
•	•	•	**F210B** - BlueBUS
•	•	•	**FT210B** - For sensitive edges, BlueBUS
			Flashing light
			ELAC
•	•	•	**ELDC**
•	•	•	**WLT** - Multifunction LED light

* Radio receiver not compatible with the O-box functions of the Opera system.

Nice

Roadkit

For sliding gates up to 400 kg.

Available in a KIT



Practical: built-in control unit, removable via practical guided plug-in connector, integrated radio receiver also compatible with the Flo and Smilo series: can store up to 100 codes!

Advanced: Decelerations can be managed directly from the control unit and gate movement speed and force can be adjusted.

Smart: thanks to obstacle detection and automatic programming of operating times. Self-diagnostics with indications via the flashing light.

Practical and reliable: control unit and PS124 buffer batteries (optional) housed in Road, practical plug-in connections.

24V

Opera



Programmable via App

With Pro-View or Bidi-WiFi & MyNice Pro App, installing Nice Gate&Door systems is even easier and more convenient.

Find out more on page → 28

Code	Description	Pcs./Pallet
RDKCE	Kit for sliding gates up to 400 kg and with leaves up to 6 m, 24 VDC, with built-in receiver and control unit	-

The kit contains:

Code	Description	Quantity
RD400	Non-reversible electromechanical gearmotor, 24 VDC, with built-in receiver and control unit, provision for PS124 buffer battery (optional)	1
INTI2	Transmitter, 433.92 MHz, 2 channels	2
EPM	Pair of surface mounted photocells	1
ELDC	Flashing LED light with integrated antenna	1
TS	Sign	1

N.B. The contents of the pack may vary: always consult the dealer.

COMMON ACCESSORIES


Code	Description	Pcs. Pack
RBA4	Spare control unit for RDKCE	1
PS124	24 V battery with integrated battery charger	1
CM-B	Release ratchet with two metal keys	1
ROA6	Slotted rack, M4 25x20x1000 mm, nylon with metal insert. For gates up to 500 kg	10
ROA66	Slotted nylon rack M4 25x20x1000 mm with metal core and six clear fastening points. For gates weighing up to 800 kg	10
ROA7	Galvanised rack, M4 22x22x1000 mm	10
ROA8	Galvanised rack, M4 30x8x1000 mm, with screws and spacers	10

Find out more on page → 130.

TECHNICAL SPECIFICATIONS

Code	RD400
ELECTRICAL SPECIFICATIONS	
Power supply (VAC 50/60 Hz)	230
Draw (A)	1,1
Power (W)	210
PERFORMANCE DATA	
Speed (m/s)	0,25
Force (N)	400
Working cycle (cycles/hour)	20
DIMENSIONAL AND GENERAL DATA	
Protection class (IP)	44
Operating temperature (°C Min/Max)	-20 ÷ +55
Dimensions (mm)	330x195x277 h
Weight (kg)	8

DIMENSIONS

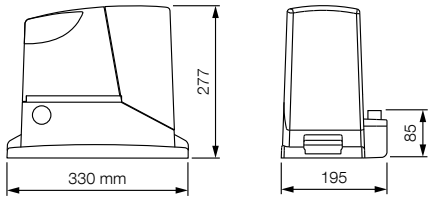

COMPATIBILITY WITH CONTROL SYSTEMS AND ACCESSORIES

	RD400
	Control unit/Receiver
•	**Integrated***
	OXIBD / **OXILR**
	Transmitter
•	**ERA INTI** - 2 channels, 433.92 MHz, different colours
•	**ERA ONE** / **MYGO** - 1, 2, 4 or 9 channels, 433.92 MHz
	ERA ONE BD / **MYGOBD** / **ERA ONE LR**
•	**ERA FLOR** / **DOMì**
	Photocells
•	**EPS** - Slim / **EPM** - Medium / **EPL** - Large
	EPSB - Slim, BlueBUS / **EPMB** - Medium, BlueBUS / **EPLB** - Large, BlueBUS
•	**EPMOR** - Medium, reflective
	EPMORB - Medium, BlueBUS, reflective
	EPMOW - Medium, wireless self-synchronised
•	**F210** - Synchronised, adjustable / **FT210** - For sensitive edges
	F210B - BlueBUS
	FT210B - For sensitive edges, BlueBUS
	Flashing light
	ELAC
•	**ELDC**
•	**WLT** - Multifunction LED light

* Radio receiver not compatible with the O-box functions of the Opera system.

Nice

Robo 600

For sliding gates up to 600 kg.

Available in a KIT

Non-reversible, 230 VAC, electromechanical limit switch, control unit with integrated radio receiver.

Efficient and safe: functional mechanical design and high-performance materials.

Safe and easy-to-use release lever.

Easy to programme thanks to the MyNice Pro app, connecting the control unit to the Pro-View or BiDi-WiFi, making all control unit programming easy and automatic.


Easy to install: thanks to compatibility with previous Nice models and horizontal and vertical adjustment systems.

Always connected even remotely, thanks to the BIDI-WIFI or BIDI-ZWAVE module



230V

Opera

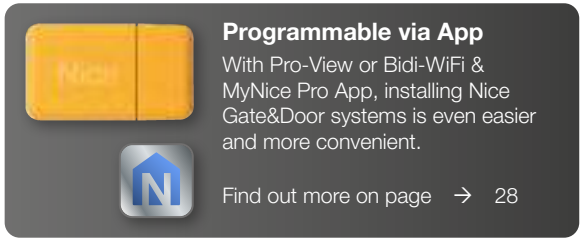

Programmable via App

With Pro-View or Bidi-WiFi & MyNice Pro App, installing Nice Gate&Door systems is even easier and more convenient.

Find out more on page → 28

Code	Description
RO600	Non-reversible electromechanical gearmotor, 230 VAC, with control unit and integrated receiver, for sliding gates weighing up to 600 kg
RO600KCE	Kit for automating sliding gates up to 600 kg, 230 VAC, integrated control unit, integrated radio receiver. The kit includes: RO600, 2 xINTI2 , 1 x EPM, 1 x ELAC
RO600KLT	EasyKit for automating sliding gates up to 600 kg, 230 VAC, integrated control unit, integrated radio receiver. The kit includes: RO600, 2 x INTI2

N.B. Pack contents may vary: always consult the dealer

The RO600KCE kit contains:

Code	Description	Quantity
RO600	Non-reversible electromechanical gearmotor, 230 VAC, with control unit and integrated receiver, for sliding gates weighing up to 600 kg	1
INTI2	Transmitter, 433.92 MHz, 2 channels	2
EPM	Pair of surface mounted photocells	1
ELAC	Flashing LED light with integrated antenna	1

The RO600KLT kit contains:

Code	Description	Quantity
RO600	Non-reversible electromechanical gearmotor, 230 VAC, with control unit and integrated receiver, for sliding gates weighing up to 600 kg	1
INTI2	Transmitter, 433.92 MHz, 2 channels	2

COMMON ACCESSORIES


Code	Description	Pcs. Pack
ROA41	Spare control unit for RO600	1
ROA6	Slotted nylon rack M4 25x20x1000 mm with metal core. For gates weighing up to 500 kg	1
ROA7	Galvanised rack, M4 22x22x1000 mm	1
ROA8	Galvanised rack M4 30x8x1000 mm, with screws and spacers.	1
TS	Sign	1

Find out more on page → 130.

TECHNICAL SPECIFICATIONS

Code	**RO600**
ELECTRICAL SPECIFICATIONS	
Power supply (VAC 50/60 Hz)	230
Power (W)	300
PERFORMANCE DATA	
Speed (m/s)	0,18
Force (N)	600
Working cycle (cycles/hour)	20
DIMENSIONAL AND GENERAL DATA	
Protection class (IP)	44
Operating temperature (°C Min/Max)	-20 ÷ +55
Dimensions (mm)	340x220xW303 h
Weight (kg)	11

DIMENSIONS

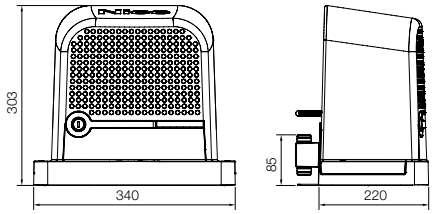

COMPATIBILITY WITH CONTROL SYSTEMS AND ACCESSORIES

	ROBO
	Control unit/Receiver
•	**Integrated***
	OXIBD / **OXILR**
	Transmitter
•	**ERA INTI** - 2 channels, 433.92 MHz, different colours
•	**ERA ONE** / **MYGO** - 1, 2, 4 or 9 channels, 433.92 MHz
	ERA ONE BD / **MYGOBD** / **ERA ONE LR**
•	**ERA FLOR** / **DOMì**
	Photocells
•	**EPS** - Slim / **EPM** - Medium / **EPL** - Large
	EPSB - Slim, BlueBUS / **EPMB** - Medium, BlueBUS / **EPLB** - Large, BlueBUS
•	**EPMOR** - Medium, reflective
	EPMORB - Medium, BlueBUS, reflective
	EPMOW - Medium, wireless self-synchronised
•	**F210** - Synchronised, adjustable / **FT210** - For sensitive edges
	F210B - BlueBUS
	Flashing light
•	**ELAC**
	ELDC
	WLT - Multifunction LED light

* Radio receiver not compatible with the O-box functions of the Opera system.

Nice

Run 1500

For sliding gates up to 1500 kg.

Versions with electromechanical limit switch (RUN1500) and inductive limit switch (RUN1500P).

Simple: thanks to the BlueBUS system allowing connections with just two wires between the control unit and up to 7 pairs of photocells and control, safety and signalling devices.

Practical: control unit and PS124 buffer batteries (optional) housed in Run, practical guided plug-in connector.

Advanced: the temperature sensor adapts the motor force to the climatic conditions while at the same time adjusting the thermal protection; a master/slave selection automatically synchronises 2 motors, allowing automation of sliding gates with two opposing leaves.

Smart: thanks to obstacle detection and automatic programming of operating times. Self-diagnostics with indications via the flashing light. 8 programming levels.

Safe: adjustable acceleration and deceleration at the start and end of each manoeuvre.

Sturdy: release with aluminium handle for easy opening.

Quiet: gearmotor on bearings.



BlueBus
BiDi
24V
Yubii
Solemyo
Opera



Programmable via App

With Pro-View or Bidi-WiFi & MyNice Pro App, installing Nice Gate&Door systems is even easier and more convenient.

Find out more on page → 28

Code	Description	Pcs./Pallet
RUN1500	Non-reversible, 24 VDC, with integrated control unit, electromechanical limit switch, for gates up to 1500 kg	12
RUN1500P	Non-reversible, 24 VDC, with integrated control unit, inductive limit switch, for gates up to 1500 kg	12

COMMON ACCESSORIES


Code	Description	Pcs. Pack
RBA3	Spare control unit, for RB400, RB600/600P, RB1000/1000P and RUN1500/1500P	1
PS124	24 V battery with integrated battery charger	1
RBA1	Inductive limit switch	1
ROA7	Galvanised rack, M4 22x22x1000 mm	10
ROA8	Galvanised rack, M4 30x8x1000 mm, with screws and spacers	10
ROA81	Galvanised rack M6 30x30x1000 mm, weld-on, for use with RUA12 crown	10
RUA12	12-tooth crown, module 6, for use with ROA81 rack. Run is supplied with a module 4 crown to use standard ROA7 and ROA8 racks	1
SYKCE	Solar power supply kit consisting of SYP photovoltaic panel and PSY24 battery box with charging control circuit	1
TS	Sign	1

Find out more on page → 130.

TECHNICAL SPECIFICATIONS

Code	**RUN1500/1500P**
ELECTRICAL SPECIFICATIONS	
Power supply (VAC 50/60 Hz)	230
Draw (A)	2
Power (W)	400
PERFORMANCE DATA	
Speed (m/s)	0,25
Force (N)	1000
Working cycle (cycles/hour)	60
DIMENSIONAL AND GENERAL DATA	
Protection class (IP)	44
Operating temperature (°C Min/Max)	-20 ÷ +50
Dimensions (mm)	400x255x390 h
Weight (kg)	19

DIMENSIONS

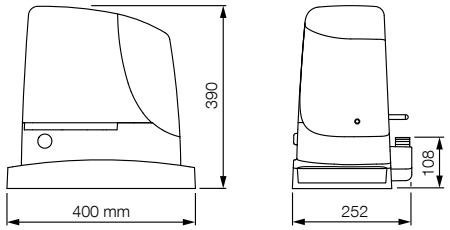

COMPATIBILITY WITH CONTROL SYSTEMS AND ACCESSORIES

	RUN1500/1500P
	Control unit/Receiver
	Integrated*
•	**OXIBD** / **OXILR**
	Transmitter
•	**ERA INTI** - 2 channels, 433.92 MHz, different colours
•	**ERA ONE** / **MYGO** - 1, 2, 4 or 9 channels, 433.92 MHz
•	**ERA ONE BD** / **MYGOBD** / **ERA ONE LR**
•	**ERA FLOR** / **DOMì**
	Photocells
	EPS - Slim / **EPM** - Medium / **EPL** - Large
•	**EPSB** - Slim, BlueBUS / **EPMB** - Medium, BlueBUS / **EPLB** - Large, BlueBUS
•	**EPMOR** - Medium, reflective
•	**EPMORB** - Medium, BlueBUS, reflective
•	**EPMOW** - Medium, wireless self-synchronised
	F210 - Synchronised, adjustable / **FT210** - For sensitive edges
•	**F210B** - BlueBUS
	FT210B - For sensitive edges, BlueBUS
	Flashing light
	ELAC
•	**ELDC**
•	**WLT** - Multifunction LED light


* Radio receiver not compatible with the O-box functions of the Opera system.

Nice

Run 1800/2500

To automate sliding gates up to 1800 kg (RUN1800) **and 2500 kg** (RUN2500).

Suitable for use in extreme conditions and in systems intended for intensive use.

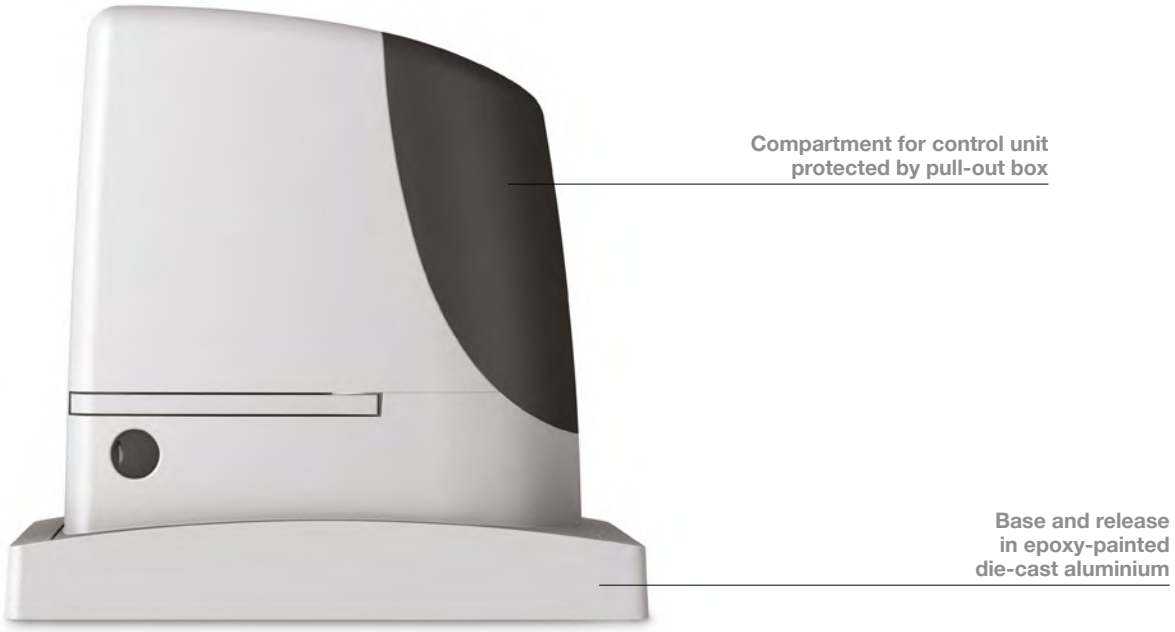

Self-ventilated motor with inductive limit switch (RUN1800P/RUN2500P) and electromechanical limit switch (RUN1800/RUN2500/RUN2500I).

Easy to install: the BlueBUS system allows connections with just two wires between the control unit and up to 15 control, safety and signalling devices.

Safe: the acceleration (at the start of the manoeuvre) and deceleration (at the end of the manoeuvre) settings are precise and reliable.

Advanced temperature sensor: Run is able to manage its force, adapting it to the different climatic and environmental conditions while at the same time adjusting the thermal protection and self-ventilation intensity depending on the temperature detected.

Master/slave selection: also automatically synchronises 2 motors, allowing automation of sliding gates with two opposing leaves.

Practical and functional: the control unit (and the inverter in the RUN2500I version) housed in Run can be connected via a practical plug-in connector.

Quiet: gearmotor on bearings.

RUN2500I version with integrated inverter.

Flawless movement: the inverter enables the three-phase motor to be powered and operated with 230 VAC single-phase current, adjusting the frequency to regulate the automation speed from a minimum of 8.2 m/min to a maximum of 15.4 m/min. During the automation deceleration phase, the inverter communicates with the control unit and increases the torque, improving performance and reducing the risk of the automation blocking in the presence of obstacles.

BlueBus | BiDi | 230V | Yubii | Opera



Programmable via App

With Pro-View or Bidi-WiFi & MyNice Pro App, installing Nice Gate&Door systems is even easier and more convenient.

Find out more on page → 28

Code	Description	Pcs./Pallet
RUN1800	Non-reversible, 230 VAC, with integrated control unit, electromechanical limit switch for gates up to 1800 kg	12
RUN1800P	Non-reversible, 230 VAC, with integrated control unit, inductive limit switch for gates up to 1800 kg	12
RUN2500	Non-reversible, 230 VAC, with integrated control unit, electromechanical limit switch for gates up to 2500 kg	12
RUN2500P	Non-reversible, 230 VAC, with integrated control unit, inductive limit switch for gates up to 2500 kg	12
RUN2500I	Non-reversible, 230 VAC, with built-in control unit and inverter, electromechanical limit switch, for gates up to 2500 kg	12

COMMON ACCESSORIES

Code	Description	Pcs. Pack
RUA1	Spare control unit for RUN1800/1800P and RUN2500/2500P	1
RUA2	Spare control unit for RUN2500I	1
RUA3	Spare inverter for RUN2500I	1
ROA7	Galvanised rack, M4 22x22x1000 mm	10
ROA8	Galvanised rack, M4 30x8x1000 mm, with screws and spacers	10
ROA81	Galvanised rack M6 30x30x1000 mm, weld-on, for use with RUA12 crown	10
RUA12	12-tooth crown, module 6, for use with ROA81 rack. Run is supplied with a module 4 crown to use standard ROA7 and ROA8 racks	1
TS	Sign	1


Find out more on page → 130.

TECHNICAL SPECIFICATIONS

Code	RUN1800/1800P	RUN2500/2500P	RUN2500I
ELECTRICAL SPECIFICATIONS			
Power supply (VAC/Hz)	230/50*		230/50-60
Draw (A)	3	3,8	3,7
Power (W)	700	870	650
PERFORMANCE DATA			
Speed (m/s)	0,17		0,26
Force (N)	1110	1390	1660
Working cycle (cycles/hour)	42		56
DIMENSIONAL AND GENERAL DATA			
Protection class (IP)	44		
Operating temperature (°C Min/Max)	-20 ÷ +50		
Dimensions (mm)	400x255x390 h		
Weight (kg)	24,5		25

* 60 Hz version available on request.

DIMENSIONS

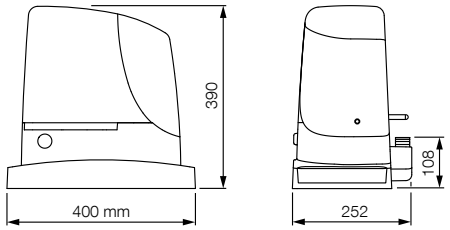

COMPATIBILITY WITH CONTROL SYSTEMS AND ACCESSORIES

RUN1800/1800P	RUN2500/2500P	RUN2500I	
			Control unit/Receiver
			Integrated*
•	•	•	**OXIBD** / **OXILR**
			Transmitter
•	•	•	**ERA INTI** - 2 channels, 433.92 MHz, different colours
•	•	•	**ERA ONE** / **MYGO** - 1, 2, 4 or 9 channels, 433.92 MHz
•	•	•	**ERA ONE BD** / **MYGOBD** / **ERA ONE LR**
•	•	•	**ERA FLOR** / **DOMì**
			Photocells
			EPS - Slim / **EPM** - Medium / **EPL** - Large
•	•	•	**EPSB** - Slim, BlueBUS / **EPMB** - Medium, BlueBUS / **EPLB** - Large, BlueBUS
			EPMOR - Medium, reflective
•	•	•	**EPMORB** - Medium, BlueBUS, reflective
•	•	•	**EPMOW** - Medium, wireless self-synchronised
			F210 - Synchronised, adjustable / **FT210** - For sensitive edges
•	•	•	**F210B** - BlueBUS
•	•	•	**FT210B** - For sensitive edges, BlueBUS
			Flashing light
•	•	•	**ELAC**
			ELDC
			WLT - Multifunction LED light

* Radio receiver not compatible with the O-box functions of the Opera system.

Nice

Tub

For sliding gates up to 4000 kg.

Ideal for industrial applications.



Self-ventilated motor to increase the work cycle

400V

BiDi

Yubii

Opera

Programmable via App

With Pro-View or Bidi-WiFi & MyNice Pro App. Find out more on page → 28

Non-reversible 400 VAC electromechanical gearmotor, with built-in D-PRO 500 control unit.

Powerful: ideal for automating large industrial gates.

Functionality and safety: programmable, with electromechanical brake to eliminate gate inertia. Self-ventilated motor to increase the work cycle.

Maximum durability and silent operation: metal and bronze gears.

Advanced: Tub satisfies all control needs thanks to the possibility of easily and precisely managing the various functions with the Pro-View programmer.

Practical: the lever release makes this operation easy and safe.

Code	Description	Pcs./Pallet
TUB4000	Non-reversible electromechanical gearmotor, 400 VAC, with built-in D-PRO 500 control unit	

TECHNICAL SPECIFICATIONS

Code	**TUB4000**
ELECTRICAL SPECIFICATIONS	
Power supply (VAC 50 Hz)*	400
Draw (A)	1,6
Power (W)	580
PERFORMANCE DATA	
Speed (m/s)	0,16
Force (N)	7740
Working cycle (cycles/hour)**	42
DIMENSIONAL AND GENERAL DATA	
Protection class (IP)	54
Operating temperature (°C Min/Max)	-20 ÷ +50
Dimensions (mm)	480x240x580 h
Weight (kg)	60


* Can also be used at 60 Hz with corresponding change in performance. ** With leaves up to 5 m.

COMMON ACCESSORIES

Code	Description	Pcs. Pack
DPRO500	Control units	1
NDA040	For optional potential free outputs	1
ROA81	Galvanised rack M6 30x30x1000 mm, weld-on, for use with RUA12 crown	10
TS	Sign	1

Find out more on page → 130.

DIMENSIONS

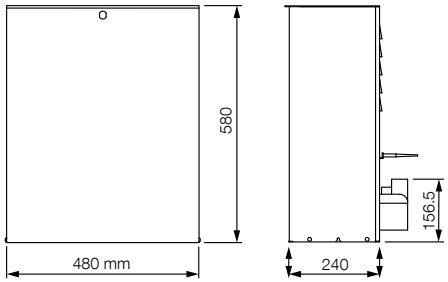

COMPATIBILITY WITH CONTROL SYSTEMS AND ACCESSORIES

	TUB4000
	Control unit/Receiver
	Integrated*
•	**OXIBD** / **OXILR**
	Transmitter
•	**ERA INTI** - 2 channels, 433.92 MHz, different colours
•	**ERA ONE** / **MYGO** - 1, 2, 4 or 9 channels, 433.92 MHz
•	**ERA ONE BD** / **MYGOBD** / **ERA ONE LR**
•	**ERA FLOR** / **DOMì**
	Photocells
•	**EPS** - Slim / **EPM** - Medium / **EPL** - Large
	EPSB - Slim, BlueBUS / **EPMB** - Medium, BlueBUS / **EPLB** - Large, BlueBUS
•	**EPMOR** - Medium, reflective
	EPMORB - Medium, BlueBUS, reflective
	EPMOW - Medium, wireless self-synchronised
•	**F210** - Synchronised, adjustable / **FT210** - For sensitive edges
	F210B - BlueBUS
	FT210B - For sensitive edges, BlueBUS
	Flashing light
•	**ELAC**
	ELDC
	WLT - Multifunction LED light

* Radio receiver not compatible with the O-box functions of the Opera system.



Nice

Accessories for sliding gates

SPARE CONTROL UNITS



NKA3
Control unit.

Pcs./pack 1



MCU1
Spare control unit for RBS400/600 complete with MLAE22 board and built-in Wi-Fi.

Pcs./pack 1



RBA3
Spare control unit for RB400, RB600/600P, RB1000/1000P and RUN1500/1500P.

Pcs./pack 1



RBA4
Spare control unit for RDKCE.



ROA41
Spare control unit for RO600.

Pcs./pack 1



RUA1
Spare control unit for RUN1800/1800P and RUN2500/2500P.

Pcs./pack 1



RUA2
Spare control unit for RUN2500I.

Pcs./pack 1



RUA3
Spare inverter for RUN2500I.

Pcs./pack 1



DPRO500
Control unit.

Pcs./pack 1

EXPANSION BOARD FOR CONTROL UNIT MLA1



MLAE21
Plug-in expansion board 1 Output 2 Input.

Pcs./pack 1



MLAE22
Plug-in expansion board 2 Output (1 230V Relay) 2 Input.

Pcs./pack 1



MLAE44
Plug-in expansion board 4 Output 4 Input.

Pcs./pack 1

RACKS



ROA6
Slotted rack, M4 25x20x1000 mm, nylon with metal insert. For gates up to 500 kg.

Pcs./pack 10



ROA66
Slotted nylon rack M4 25x20x1000 mm with metal core, six fastening points. For gates weighing up to 800 kg.

Pcs./pack 10



ROA7
Galvanised rack, M4 22x22x1000 mm.

Pcs./pack 10



ROA8
Galvanised rack, M4 30x8x1000 mm, with screws and spacers.

Pcs./pack 10



ROA81
Galvanised rack M6 30x30x1000 mm, weld-on, for use with RUA12 crown.

Pcs./pack 10

OTHER ACCESSORIES



RUA12
12-tooth crown gear, module 6, for use with ROA81 rack (solely for Run).

Pcs./pack 1



RBA1
Inductive limit switch.

Pcs./pack 1



KIO
Key switch for low-voltage contacts, with release mechanism for metal cable.

Pcs./pack 1



KA1
Kit with 6 m metal cable for KIO.

Pcs./pack 1



CM-B
Release ratchet with two metal keys.

Pcs./pack 1



NDA040
For optional potential free outputs.

Pcs./pack 1



TS
Sign.

Pcs./pack 1


ACCESSORIES FOR 24 V VERSIONS



PS124
24 V battery with integrated battery charger.

Pcs./pack 1


Standard installation diagram for sliding gates

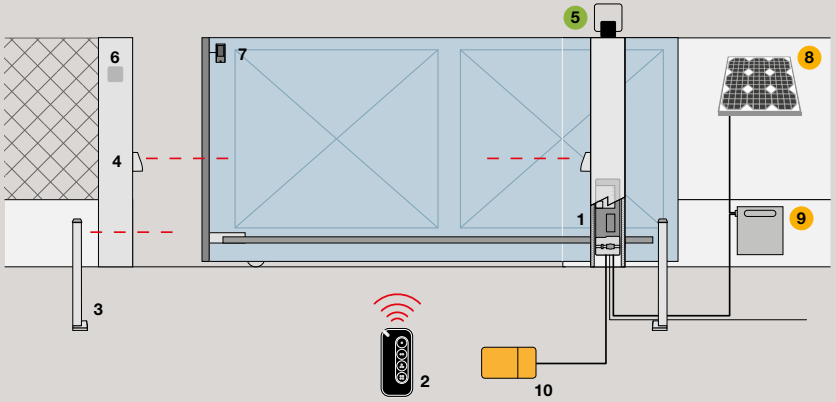

NAKED SLIDING 400

1. Motor **2.** Transmitter **3.** Post-mounted photocells **4.** Photocells **5.** Flashing light **6.** Key switch **7.** Sensor for sensitive edge **8.** SYP solar panel **9.** PSY24 battery box **10.** Pro-View multifunction interface


- Accessories also available in wireless version **Solemyo Air Net System**
- Solemyo solar power **accessories**

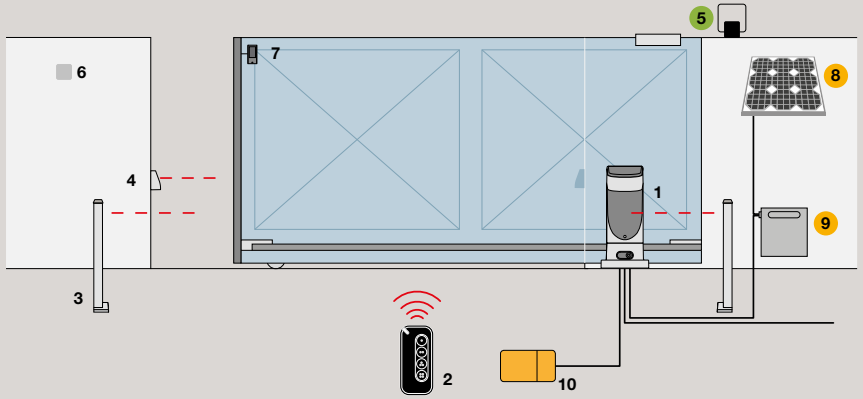

SLIGHT

1. Motor **2.** Transmitter **3.** Post-mounted photocells **4.** Photocells **5.** Flashing light **6.** Key switch **7.** Sensor for sensitive edge **8.** SYP solar panel **9.** PSY24 battery box **10.** Pro-View multifunction interface


- Accessories also available in wireless version **Solemyo Air Net System**
- Solemyo solar power **accessories**

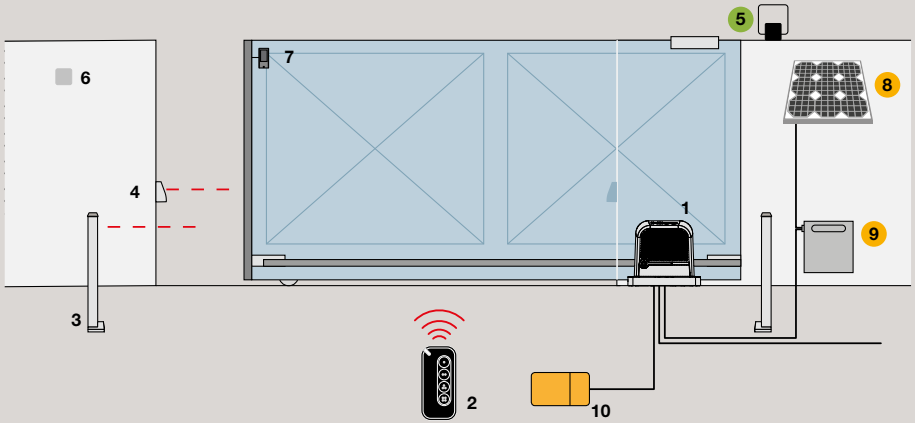

NEW ROBUS 400/600, ROBUS 400/600/1000

1. Motor **2.** Transmitter **3.** Post-mounted photocells **4.** Photocells **5.** Flashing light **6.** Key switch **7.** Sensor for sensitive edge **8.** SYP solar panel **9.** PSY24 battery box **10.** Pro-View multifunction interface


- Accessories also available in wireless version **Solemyo Air Net System**
- Solemyo solar power **accessories**

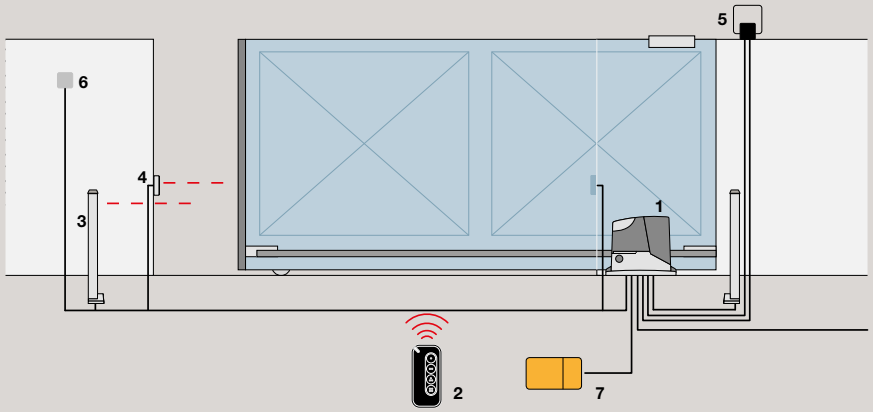

ROADKIT


1. Motor **2.** Transmitter **3.** Post-mounted photocells **4.** Photocells **5.** Flashing light **6.** Key switch **7.** Pro-View multifunction interface

Nice

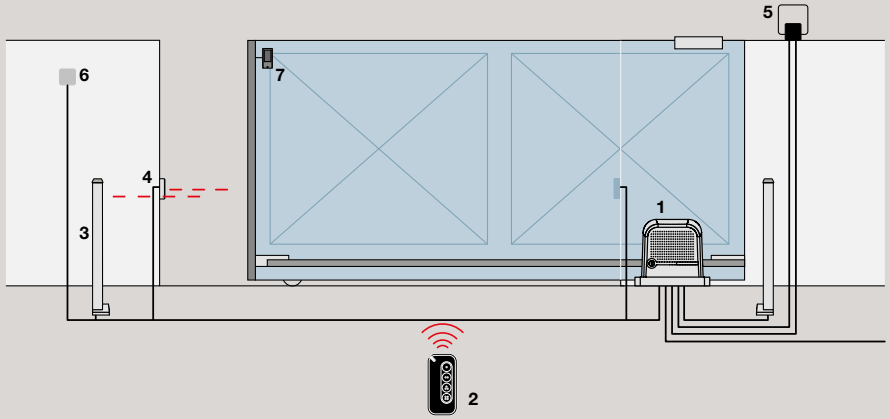

ROBO 600


1. Motor **2.** Transmitter **3.** Post-mounted photocells **4.** Photocells **5.** Flashing light **6.** Key switch **7.** Sensor for sensitive edge

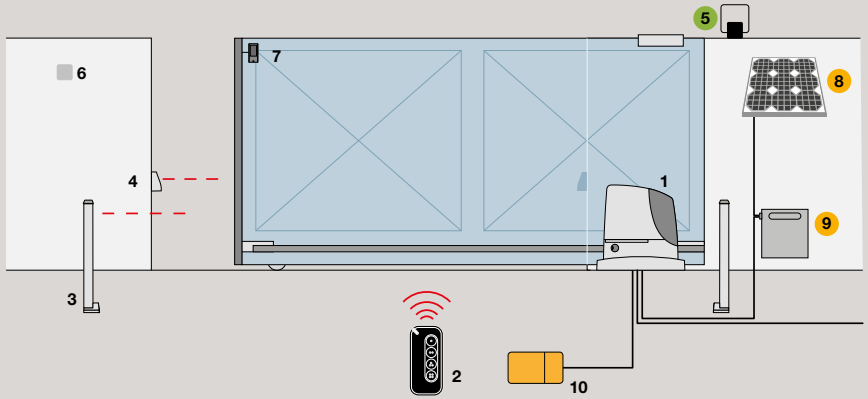

RUN 1500

1. Motor **2.** Transmitter **3.** Post-mounted photocells **4.** Photocells **5.** Flashing light **6.** Key switch **7.** Sensor for sensitive edge **8.** SYP solar panel **9.** PSY24 battery box **10.** Pro-View multifunction interface


- Accessories also available in wireless version **Solemyo Air Net System**
- Solemyo solar power **accessories**

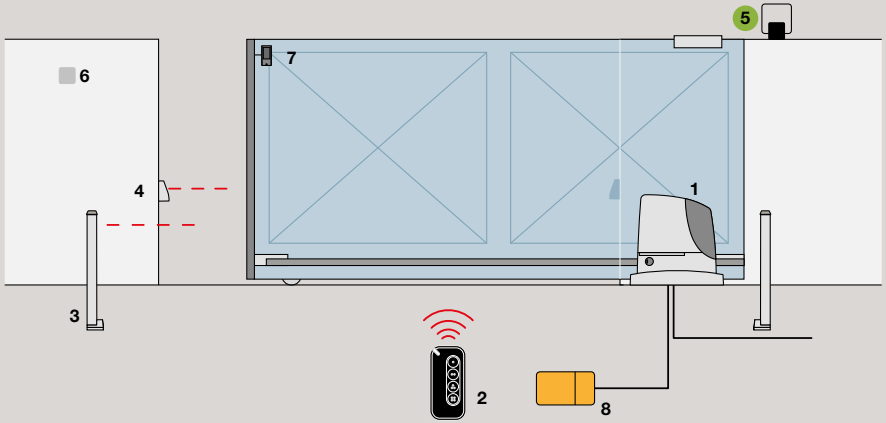

RUN 1800/2500

1. Motor **2.** Transmitter **3.** Post-mounted photocells **4.** Photocells **5.** Flashing light **6.** Key switch **7.** Sensor for sensitive edge **8.** Pro-View multifunction interface

- Accessories also available in wireless version **Solemyo Air Net System**

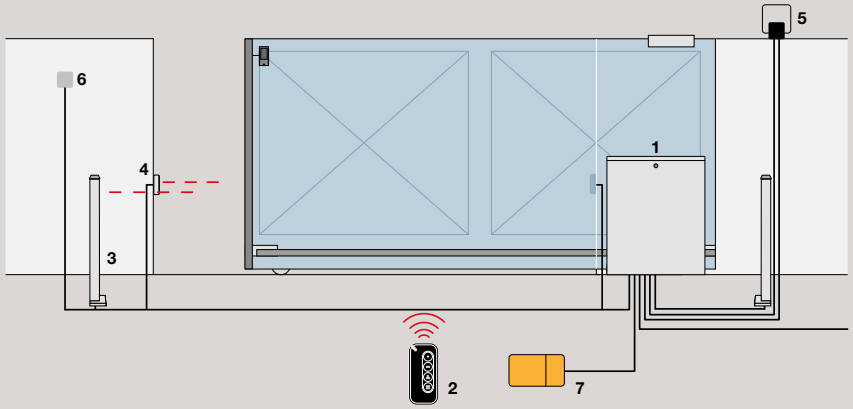

TUB

1. Motor **2.** Transmitter **3.** Post-mounted photocells **4.** Photocells **5.** Flashing light **6.** Key switch **7.** Pro-View multifunction interface