ijRASET

INTERNATIONAL JOURNAL

FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

www.ijraset.com

Call: ⓒ08813907089 | E-mail ID: ijraset@gmail.com

IOT Based Distance Measuring Robot

Mr. Arjun Ray[1], Mr. Debabrata Sarkhel[2], Mr. Sujan Banerjee[3], Mrs. Priyanka Dutta[4], Mr. Kailash Bauri[5]

[1, 3, 4, 5]Lecturer, Swami Vivekananda School of Diploma, Durgapur-713212

[2]Sr. Lecturer, Swami Vivekananda School of Diploma, Durgapur-713212

Abstract: The paper describes the development of a distance measurement system that uses ultrasonic waves and is interfaced with a microcontroller module ATmega328P and the ATMega 16U2 Processor. We know that the human audible range is 20 Hz to 20 kHz. We can use these frequency range waves with an ultrasonic sensor. The advantages of this sensor are that when it is connected to an Arduino, which is a control and sensing system, a pro per distance measurement can be done using new methodologies. As vast sums of money are spent on hundreds of inflexible circuit boards, the Arduino will enable businesses to introduce many more unique items. This distance measurement system has a wide range of industrial applications, including range meters and proximity detectors. The ultrasonic sensor's hardware is interfaced with the Arduino. This method of measurement is an effective way to accurately measure small distances. The distance between an obstruction and the sensor is measured using an ultrasonic sensor. After knowing the speed of sound, the distance can be computed. In this project, The Bluetooth sensor receives a code from the Arduino app, and the Arduino operates in accordance with the code. Additionally, an ultrasonic sensor is utilized, which transmits an ultrasonic wave towards the object. When the ultrasonic wave returns after hitting the item, the transmitter detects the obstacle's distance and displays it on the LCD in centimeters. Using the ESP32 camera module, the user may log in to a specific IP address and see the object from a remote location while also controlling the robot.

Keywords: ATmega328P, 20 Hz to 20 kHz, ultrasonic sensor, ESP32 camera module, Bluetooth sensor.

I. INTRODUCTION

Robotics has been a crucial part of the manufacturing industry since the mid-twentieth century and continues to advance. The next significant challenge for robotics is to develop applications for home and personal usage, which will require closer connection between robots and humans. Research in robots has prioritized social learning for many reasons. Commercial interest in constructing robots for everyday usage in homes, offices, hospitals, and museums relies on social learning to adjust systems to specific contexts and user preferences. Artificial intelligence research has focused on social learning as a way to construct robots that can acquire new knowledge and become more complicated without human intervention. Researchers use machine learning models to better understand social learning in animals, including humans.

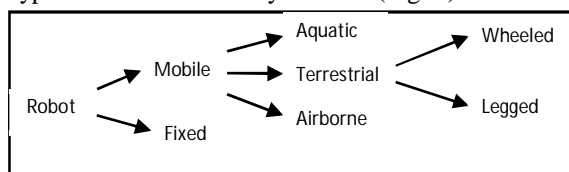Robots can be categorized based on the type of environment they work in (Fig. 1).

Fig 1: Classification of robots by environment and mechanism of interaction.

Presently one of the scientific study areas that are growing the fastest is mobile robots. Mobile robots have the ability to replace humans in many different industries. Distance to collision for robot manipulators is important for determining the viability of a robot configuration or defining safe robot movements in uncertain situations. However, distance estimation is a time-consuming process, and the sensors used to measure the distance are always noisy. There is a hurdle in estimating the predicted distance to collision for better robot control and planning.

The purpose of this study is to construct an Arduino-interfaced ultrasonic wave-based distance measurement system. Human hearing is known to vary from 20 Hz to 20 kHz. We may make use of these frequency range waves by using the ultrasonic sensor. The benefits of this sensor include the ability to measure a pro per distance using novel methods when interfaced with an Arduino, a control and sensing system.

II. LITERATURE REVIEW

Jinshan Wang et.al introduces an integrated mobile robotic measurement system for the accurate and automatic 3D measurement of large-scale components with complex curved surfaces. The measurement system is composed of a mobile manipulator, a fringe projection scanner and a stereo vision system, and it can provide accurate noncontact 3D measurements of large-scale complex components[1]. Rui Wang et.al proposes a 6R robot closed-loop kinematic calibration method to improve absolute position accuracy with point and distance constraints though machine vision[2]. T.S. Lembono et. al have proposed a calibration method called SCALAR consisting of calibration setup that requires a flat plate with two small holes drilled at a given distance apart and a sharp tool-tip attached to the robot's flange to calibrate both the kinematic characteristics of a 6-DoF robot and the extrinsic parameters of a 2-D laser range finder (LRF) mounted on the robot's flange[3]. An active disturbance rejection control strategy is demonstrated in practice to increase the Meca500's route accuracy has been suggested by Tarek A. Khaled[4]. To accomplish the dynamic path correction, a linear transducer (Renishaw's QC20-W ballbar) is used to measure the distance between a fixed point and the robot tooltip. The tooltip velocity vector is then fed to the robot (via Ethernet TCP/IP).

Nikhil Das and Michael C. Yip have proposed the use of Gaussian process (GP) regression and the forward kinematics (FK) to efficiently and accurately estimate distance to collision[5]. C. Sifferman et. al provide a calibration process that can accurately identify the posture of a single-pixel distance sensor using just the robot's known motion and an unknown planar target. They create a geometric link between the relative sensor position, robot motion, and an arbitrary plane, and we demonstrate that the plane and sensor parameters can be retrieved using nonlinear optimization[6].

III. METHODOLOGY AND MODEL SPECIFICATIONS

A. Methodology

In this project, we used a Bluetooth sensor to receive a signal from an Android app, which then controls the motor driver circuit to mobilize the robot based on the user's preferences via an Android app. The ultrasonic sensor installed at the top of the robot is used to measure distance, and the results are displayed in the LCD display. The result which is shown in the LCD display are also be shown in the web server of an ESP-32 cam.
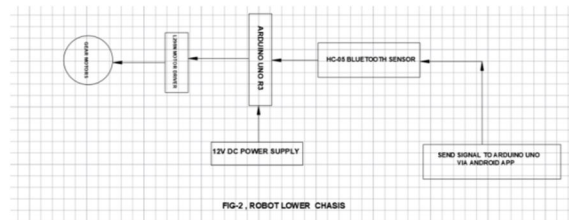

Fig 2. Block diagram of robot lower chassis

B. Equipment's specifications

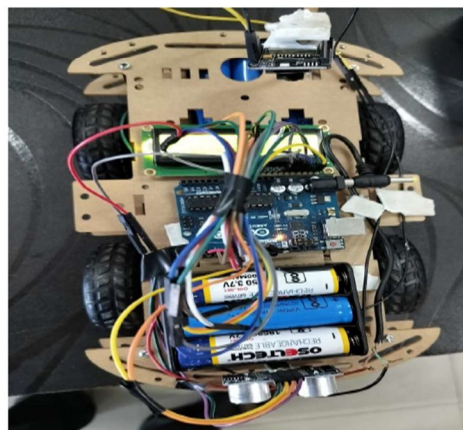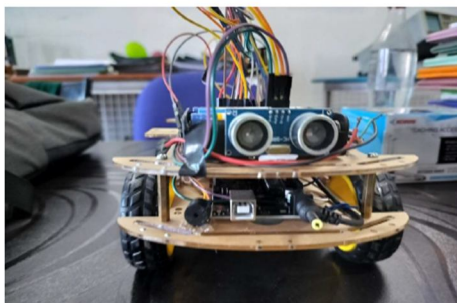| SL.NO	EQUIPMENTS	SPECIFICATIONS		BUDGET (R.S)
1.	Arduino uno R3(2 pcs)	Consist of ATmega328P and the ATMega 16U2 Processor		1500
2.	Bluetooth Sensor (HC05)	Frequency: 2.4GHz ISM band		245
3.	16X2 LCD Display	Operating Voltage: 4.7V to 5.3V Operating Current: 1mA (without backlight) Can display (16x2) 32 Alphanumeric Characters Works in both 8-bit and 4-bit Mode		419
4.	Ultra sonic sensor	Power Supply: DC 5V Working Current: 15mA Working Frequency: 40Hz Ranging Distance:2cm–4m Resolution : 0.3 cm Measuring Angle: 15 degree Trigger Input Pulse width: 10uS Dimension:45mm x 20mm x 15mm		125
5.	L298N Motor driver	Integrated 5V power regulator 5V – 35V drive voltage 2A max drive current		143
6.	Robot chassis			250
7.	Gear Motor(4 pcs)	Operating voltage: 3-6V DC Gear Ratio: 1:48 Shaft Length: 8.5mm Shaft Diameter: 5.5mm No Load Current: 40-180mA Torque: 0.15Nm –0.60Nm Speed: 100 RPM Dimensions: 65mm x 22mm x 18mm Weight: less than 30g		225
8.	BO Wheels(4 pcs)	Operating Voltage 3V – 12V DC RPM Approximately 150 RPM No load current 40 – 80 mA Output Torque 3.5 kgf.cm High quality plastic wheel and BO-series motor Plastic Wheels with a slot that matches BO Motor Shaft are made to work with BO motors both Series I and II. 66mm diameter, 20mm width		160
9.	Male Female jumper wire			240
10.	Battery (6 pcs)	3.7v		360
11.	Battery case(2 pcs)			149
12.	Esp-32 with camera	RAM	Internal 520KB + External 8MB PSRAM	750
		IO Pins	9	
		Serial Port Speed	default 115200 bps	
		Image Output Format	JPEG(only OV2640 support),BMP,GRAYSCALE	
		Spectrum range	2400 –2483.5MHz	
		Antenna Type	On-board PCB antenna, gain 2dBi	
		Transmit Power	802.11b: 17±2 dBm (@11Mbps)	
		Receive Sensitivity	CCK, 1 Mbps: -90dBm,	
		Power Consumption	Flash off: 180mA@5V.	
		Power supply range	4.75-5.25V	
		Operating Temperature	-20 °C – 70 °C	
		Storage Environment	-40 °C – 125 °C , < 90%RH	
13.	Self-locking switch (2 pcs)			8
	Total Amount			4574

C.   Hardware Model

Fig 4: Hardware model structure.

IV.   RESULT

Fig 5: LCD display showing the distance of the obstacle measured by the   robot

A code is given to the Bluetooth sensor to the arduino app then as per the code the arduino will operate along with this an ultrasonic sensor is used which transmit an ultrasonic wave towards the object. Now when the ultrasonic wave returns after hitting the object then the transmitter will sense the distance of the obstacle and the LCD will display the distance in cm. By using ESP32 camera module the user can login into a particular IP address from where he can observe the distance of the object from the remote area and can also operate the robot.
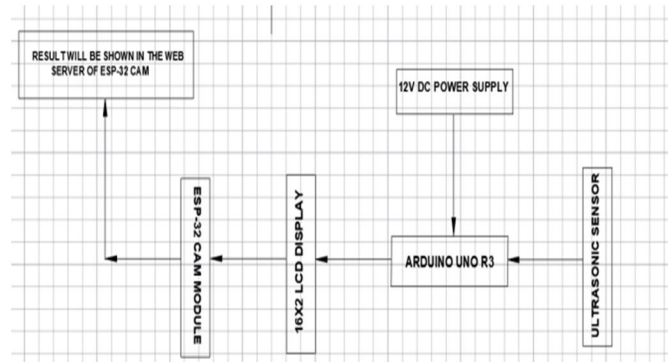
Fig 3. Block diagram of robot upper chassis

Fig 6: Result showing in the web server display.

V. CONCLUSION

In this paper, distance measurement using ultrasonic sensor and Arduino consists of a transmitter part of ultrasonic module units ultrasonic high frequency waves in the form of polices after collision of these wares with any object, these wares detected by microphone time taken by these wares from transmitter to receiver is used to measure distance from any object. We have selected an ultrasonic sensor module because it is initiated with a 10us pulse. The distance from any item is computed from. The human audible range can be used to accurately determine distances.

VI. FUTURE SCOPE

Advanced Sensing Technologies: Future distance-measuring robots may incorporate more advanced sensing technologies such as LiDAR, radar, or advanced computer vision systems to accurately measure distances in various environments and under different conditions. Autonomous Navigation: These robots could become more autonomous, able to navigate complex environments and dynamically adjust their path to measure distances efficiently and safely without human intervention.

Integration with AI and Machine Learning: Integration with artificial intelligence (AI) and machine learning algorithms could enable these robots to learn from their experiences, improve their distance-measuring accuracy over time, and adapt to different scenarios and environments that can be used in defense purpose.

VII. ACKNOWLEDGEMENT

REFERENCES

[1] Wang, Jinshan, Bo Tao, Zeyu Gong, Supu Yu, and Zhouping Yin. "A mobile robotic measurement system for large-scale complex components based on optical scanning and visual tracking." Robotics and Computer-Integrated Manufacturing 67 (2021): 102010.

[2] Wang, Rui, Anwen Wu, Xuan Chen, and Jun Wang. "A point and distance constraint based 6R robot calibration method through machine vision." Robotics and Computer-Integrated Manufacturing 65 (2020): 101959.

[3] T. S. Lembono, F. Suarez-Ruiz and Q. -C. Pham, "SCALAR: Simultaneous Calibration of 2-D Laser and Robot Kinematic Parameters Using Planarity and Distance Constraints," in *IEEE Transactions on Automation Science and Engineering*, vol. 16, no. 4, pp. 1971-1979, Oct. 2019, doi: 10.1109/TASE.2019.2918141.

[4] T. A. Khaled, O. Akhrif and I. A. Bonev, "Dynamic Path Correction of an Industrial Robot Using a Distance Sensor and an ADRC Controller," in *IEEE/ASME Transactions on Mechatronics*, vol. 26, no. 3, pp. 1646-1656, June 2021, doi: 10.1109/TMECH.2020.3026994.

[5] N. Das and M. C. Yip, "Stochastic Modeling of Distance to Collision for Robot Manipulators," in IEEE Robotics and Automation Letters, vol. 6, no. 1, pp. 207-214, Jan. 2021, doi: 10.1109/LRA.2020.3032367.

[6] C. Sifferman, D. Mehrotra, M. Gupta and M. Gleicher, "Geometric Calibration of Single-Pixel Distance Sensors," in IEEE Robotics and Automation Letters, vol. 7, no. 3, pp. 6598-6605, July 2022, doi: 10.1109/LRA.2022.3176453.

INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089 (24*7 Support on Whatsapp)