Channel Sounding (CS)

Bluetooth® Test Suite

- **Revision:** CS.TS.p0 edition 2
- **Revision Date:** 2024-11-12
- **Prepared By:** Core Specification Working Group
- **Published during TCRL:** TCRL.2024-2-addition

Contents

1 Scope

This Bluetooth document contains the Test Suite Structure (TSS) and test cases to test the implementation of the Bluetooth Channel Sounding layer with the objective to provide a high probability of air interface interoperability between the tested implementation and other manufacturers' Bluetooth devices.

2 References, definitions, and abbreviations

2.1   References

This document incorporates provisions from other publications by dated or undated reference. These references are cited at the appropriate places in the text, and the publications are listed hereinafter. Additional definitions and abbreviations can be found in [1], [2], and [3].

[1]   Bluetooth Core Specification, Version 6.0 or later

[2]   Test Strategy and Terminology Overview

[3]   Specification of the Bluetooth System, Volume 6, Part H (Channel Sounding), Version 6.0 or later

[4]   ICS Proforma for Channel Sounding (CS.ICS)

[5]   Characteristic and Descriptor descriptions are accessible via the Bluetooth SIG Assigned Numbers

[6]   Specification of the Bluetooth System, Volume 6, Part B (Link Layer), Version 6.0 or later

[7]   Specification of the Bluetooth System, Volume 6, Part F (Direct Test Mode), Version 6.0 or later

[8]   Specification of the Bluetooth System, Volume 6, Part A (RFPHY), Version 6.0 or later

[9]   Radio Frequency Physical Layer (RFPHY) Test Suite

2.2   Definitions

In this Bluetooth document, the definitions from [1], [2], and [3] apply.

2.3   Acronyms and abbreviations

In this Bluetooth document, the definitions, acronyms, and abbreviations from [1], [2], and [3] apply.

3 Test Suite Structure (TSS)

3.1   Overview

Channel Sounding
LL
LE Radio (PHY)

Table 3.1: Test Suite Structure

3.2   Test Strategy

The test objectives are to verify the functionality of the Channel Sounding layer within a Bluetooth Host and enable interoperability between Bluetooth Hosts on different devices. The testing approach covers mandatory and optional requirements in the specification and matches these to the support of the IUT as described in the ICS. Any defined test herein is applicable to the IUT if the ICS logical expression defined in the Test Case Mapping Table (TCMT) evaluates to true.

The test equipment provides an implementation of the Radio Controller and the parts of the Host needed to perform the test cases defined in this Test Suite. A Lower Tester acts as the IUT's peer device and interacts with the IUT over-the-air interface. The configuration, including the IUT, needs to implement similar capabilities to communicate with the test equipment. For some test cases, it is necessary to stimulate the IUT from an Upper Tester. In practice, this could be implemented as a special test interface, a Man Machine Interface (MMI), or another interface supported by the IUT.

This Test Suite contains Valid Behavior (BV) tests complemented with Invalid Behavior (BI) tests where required. The test coverage mirrored in the Test Suite Structure is the result of a process that started with catalogued specification requirements that were logically grouped and assessed for testability enabling coverage in defined test purposes.

3.3   Test groups

The following test groups have been defined:

- Normalized Attack Detector

- Packet Format

- Phase Measurement

- Round Trip Time

- Timing of Steps

4 Test cases (TC)

4.1 Introduction

4.1.1 Test case identification conventions

Test cases are assigned unique identifiers per the conventions in [2]. The convention used here is:
<spec abbreviation>/<IUT role>/<class>/**<feat>**/<func>/<subfunc>/<cap>/**<xx>-<nn>-<y>**.

Identifier Abbreviation	Spec Identifier <spec abbreviation>
CS	Channel Sounding
Identifier Abbreviation	**Role Identifier <IUT role>**
INI	Initiator Role
REF	Reflector Role
Identifier Abbreviation	**Feature <feat>**
NAD	Normalized Attack Detector
PAC	Packet Format
PM	Phase Measurement
RTT	Round Trip Time
TIM	Timing of Steps

Table 4.1: CS TC feature naming conventions

4.1.2 Conformance

When conformance is claimed for a particular specification, all capabilities are to be supported in the specified manner. The mandated tests from this Test Suite depend on the capabilities to which conformance is claimed.

The Bluetooth Qualification Program may employ tests to verify implementation robustness. The level of implementation robustness that is verified varies from one specification to another and may be revised for cause based on interoperability issues found in the market.

Such tests may verify:

- That claimed capabilities may be used in any order and any number of repetitions not excluded by the specification

- That capabilities enabled by the implementations are sustained over durations expected by the use case

- That the implementation gracefully handles any quantity of data expected by the use case

- That in cases where more than one valid interpretation of the specification exists, the implementation complies with at least one interpretation and gracefully handles other interpretations

- That the implementation is immune to attempted security exploits

A single execution of each of the required tests is required to constitute a Pass verdict. However, it is noted that to provide a foundation for interoperability, it is necessary that a qualified implementation consistently and repeatedly pass any of the applicable tests.

In any case, where a member finds an issue with the test plan generated by the Bluetooth SIG qualification tool, with the test case as described in the Test Suite, or with the test system utilized, the member is required to notify the responsible party via an erratum request such that the issue may be addressed.

4.1.3   Common test case conditions

Unless stated otherwise in individual test cases, the following apply throughout this Test Suite:

1. The IUT is connected to the tester via a resistive splitter as shown in Section 4.8.1.
2. The test case is to be performed at normal operating conditions.

The Channel Sounding Test Suite uses the direct test mode in all test cases [4]. In direct test mode, hopping is disabled and the IUT's transmit and receive frequencies are set according to the frequencies for testing defined for each test.

4.1.4   Channel Sounding Test commands

The Channel Sounding Test commands allow the Upper Tester to enable a single CS procedure with multiple Subevents.

The HCI_LE_CS_Test command is used to start a Channel Sounding test that starts a CS procedure in either the Initiator or Reflector role.

The HCI_LE_CS_Test_End command stops a CS test in progress.

The HCI_LE_CS_Test_End_Complete event is generated when the IUT stops an in-progress CS test.

4.1.5   Pass/Fail verdict conventions

Each test case has an Expected Outcome section. The IUT is granted the Pass verdict when all the detailed pass criteria conditions within the Expected Outcome section are met.

The convention in this Test Suite is that, unless there is a specific set of fail conditions outlined in the test case, the IUT fails the test case as soon as one of the pass criteria conditions cannot be met. If this occurs, then the outcome of the test is a Fail verdict.

4.1.6   Common parameters and variables

Some of the following tests are started using the HCI_LE_CS_Test command, and some tests by sending LL PDUs as part of an ACL connection. Each test defines particular parameters to use that modify a default set of parameters. When using the HCI_LE_CS_Test command, use the default set of parameters in Section 4.1.6.3. When using LL PDUs, use the default parameters from Sections 4.1.6.1 and 4.1.6.2.

4.1.6.1   ACL connection parameters

When using an ACL connection, the Connection Interval is set to 500 ms.

4.1.6.2 Default Channel Sounding parameters when using LL PDUs on an ACL connection

Parameter	Value
ChM	0x1FFFFFFFFFFFFC7FFFFC (all channels)
ChMRepetition	1
Main_Mode	2 (Mode-2)
Sub_Mode	1 (Mode-1)
Main_Mode_Min_Steps	3
Main_Mode_Max_Steps	5
Main_Mode_Repetition	1
Mode_0_Steps	1
CS_SYNC_PHY	0x01 (1M PHY)
RTT_Type	0 (CS Access Address only)
ChSel	0 (Ch Sel #3b)
T_IP1	7 (145 us)
T_IP2	7 (145 us)
T_FCS	9 (150 us)
T_PM	2 (40 us)
connEventCount	NA (implementation selectable)
Offset_Min	NA (implementation selectable)
Offset_Max	NA (implementation selectable)
Max_Procedure_Len	450 ms (50 ms less than default conn interval)
Event_Interval	1
Subevents_Per_Event	1
Subevent_Interval	0 (NA)
Subevent_Len	450 ms
Procedure_Interval	0 (NA)
Procedure_Count	1
ACI	0 (1:1)
Preferred_Peer_Antennas	0
PHY	0x01 (1M PHY)
Power_Delta	0

Table 4.2: Default Channel Sounding parameters when using LL PDUs on an ACL connection

Some tests require a smaller number of channels, N. In this case, the ChM parameter should be modified to have bits set for only N channels. If more than 72 steps are required by a test, then the ChM and ChMRepetition parameters should be adjusted to produce the required number of channels.

4.1.6.3 Default Channel Sounding parameters when using the HCI_LE_CS_Test command

Parameter	Value
Main_Mode_Type	0x01 (Mode-1)
Sub_Mode_Type	0xFF (Unused)
Main_Mode_Repetition	0x00 (No repetition)
Mode_0_Steps	0x03 (Maximum)
Role	0x00 (Initiator)
RTT_Type	0x00 (RTT AA Only)
CS_SYNC_PHY	0x01 (LE 1M PHY)
CS_SYNC_Antenna_Selection	0x01 (AP1)
Subevent_Len	0xFFFFFF (Maximum)
Subevent_Interval	0x0000 (Single sub-event)
Max_Num_Sub_events	0x00 (Ignore)
Transmit_Power_Level	0x7F (Maximum)
T_IP1_Time	Shortest supported by the IUT
T_IP2_Time	Shortest supported by the IUT
T_FCS_Time	Shortest supported by the IUT
T_PM_Time	0x28 (40 us)
T_SW_Time	0x00 (0 us)
Tone_Antenna_Config	0x00 (1:1)
Companion_Signal_Enable	0x00 (Disabled)
DRBG_Nonce	0x0000
Channel_Map_Repetition	0x01 (Single repetition)
Override_Config	0x0008 (Bit 3 enabled)
Override_Parameters_Length	0x0E
Override_Parameters_Data	{0xFC 0xFF 0x7F 0xFC 0xFF 0xFF 0xFF 0xFF 0xFF 0x1F} (Channel_Map) 0x00 (Channel_Selection_Type, 3b) 0x00 (Ch3c_Shape, unused) 0x00 (Ch3c_Jump, unused) 0x00 (T_PM_Tone_Ext)

Table 4.3: Default Channel Sounding parameters when using the HCI_LE_CS_Test command

Some tests require a smaller number of channels, N. In this case, the number of bits set in the Channel_Map should be reduced to N.

If more than 72 steps are required, then the Channel_Map_Repetition parameter should be used in combination with a Channel_Map with a suitable number of bits set in order to produce the required number of channels.

4.1.6.4 Channel Sounding default frequencies

The default frequencies (f_0) used for Channel Sounding (populated in the Override Channel[i] channel pattern list) testing are as follows:

Modulation	IUT Low	IUT Mid	IUT High
1 Msym/s	2404 MHz (k=2)	2440 MHz (k=38)	2478 MHz (k=76)
2 Msym/s	2404 MHz (k=2)	2440 MHz (k=38)	2478 MHz (k=76)
2 Msym/s, BT = 2.0	2412 MHz (k=10)	2440 MHz (k=38)	2470 MHz (k=68)

Table 4.4: Channel Sounding default frequencies

The number of Mode-0 and Main-Mode CS steps per CS sub-event that use the static CS test frequencies is defined in [9] Section 4.2.3.3. The channels specified for test may be repeated per CS sub-event or per CS procedure, or both.

4.2 Setup preambles

The procedures defined in this section are used to achieve specific conditions on the IUT and the test equipment within the tests defined in this document. The preambles here are commonly used to establish initial conditions.

4.2.1 Channel Sounding Mode-0

- Preamble Procedure

    1. Perform either alternative 1A or 1B depending on the IUT role.
       Alternative 1A (IUT is Initiator):
           1A.1   The IUT sends a Mode-0 CS_SYNC bit sequence for T_SY time. At T_SY time, the signal ramps down for T_RD.
           1A.2   The Lower Tester waits for T_IP1 and sends a CS_SYNC followed by a CS Tone for T_SY + T_GD + T_FM, and then the signal ramps down for T_RD.
       Alternative 2B (IUT is Reflector):
           1B.1   The Lower Tester sends a Mode-0 CS_SYNC bit sequence for T_SY.
           1B.2   The IUT waits for T_IP1 and sends a CS_SYNC followed by a CS Tone for T_SY + T_GD + T_FM, and then the signal ramps down for T_RD.
           1B.3   The IUT reports the Mode-0 Channel Sounding results to the Upper Tester.

4.3 NAD

Verify the Normalized Attack Detector Metric.

4.3.1 Both roles

4.3.1.1 Phase-Based Normalized Attack Detector Metric

- Test Purpose

    This test verifies that the IUT Phase-Based Normalized Attack Detector Metric (NADM) properly detects an attack attempt from the Lower Tester. The IUT detects how much a received Gaussian Frequency Shift Keying (GFSK) modulated packet signal differs from the expected packet signal.

- Reference

    [3] 3.5.1, 3.5.6

- Initial Condition

  - The IUT supports the mode specified in Table 4.5. The IUT is in the Initiator role.

  - The Lower Tester signal strength is set so that the IUT receives the signal with a signal-to-noise ratio of 25 dB.

  - LE 1M PHY: The Lower Tester generates a reference signal of -67 dBm power together with a Gaussian Noise Floor of -152 dBm/Hz for the LE 1M PHY.

  - LE 2M PHY: The Lower Tester generates a reference signal of -67 dBm power together with a Gaussian Noise Floor of -155 dBm/Hz for the LE 2M PHY.

- Test Case Configuration

TCID	Role/PHY	Mode
CS/NAD/REF/BV-01-C [Phase-Based Normalized Attack Detector Metric, Mode-1, Random Sequence 32-bits, Reflector LE 1M PHY]	Reflector LE 1M	Mode-1, Random Sequence, 32-bits
CS/NAD/REF/BV-02-C [Phase-Based Normalized Attack Detector Metric, Mode-1, Random Sequence 64-bits, Reflector LE 1M PHY]	Reflector LE 1M	Mode-1, Random Sequence, 64-bits
CS/NAD/REF/BV-03-C [Phase-Based Normalized Attack Detector Metric, Mode-1, Random Sequence 96-bits, Reflector LE 1M PHY]	Reflector LE 1M	Mode-1, Random Sequence, 96-bits
CS/NAD/REF/BV-04-C [Phase-Based Normalized Attack Detector Metric, Mode-1, Random Sequence 128-bits, Reflector LE 1M PHY]	Reflector LE 1M	Mode-1, Random Sequence, 128-bits
CS/NAD/REF/BV-05-C [Phase-Based Normalized Attack Detector Metric, Mode-1, Sounding Sequence 32-bits, Reflector LE 1M PHY]	Reflector LE 1M	Mode-1, Sounding Sequence, 32-bits
CS/NAD/REF/BV-06-C [Phase-Based Normalized Attack Detector Metric, Mode-1, Sounding Sequence 96-bits, Reflector LE 1M PHY]	Reflector LE 1M	Mode-1, Sounding Sequence, 96-bits
CS/NAD/REF/BV-07-C [Phase-Based Normalized Attack Detector Metric, Mode-3, Random Sequence 32-bits, Reflector LE 1M PHY]	Reflector LE 1M	Mode-3, Random Sequence, 32-bits
CS/NAD/REF/BV-08-C [Phase-Based Normalized Attack Detector Metric, Mode-3, Random Sequence 64-bits, Reflector LE 1M PHY]	Reflector LE 1M	Mode-3, Random Sequence, 64-bits
CS/NAD/REF/BV-09-C [Phase-Based Normalized Attack Detector Metric, Mode-3, Random Sequence 96-bits, Reflector LE 1M PHY]	Reflector LE 1M	Mode-3, Random Sequence, 96-bits
CS/NAD/REF/BV-10-C [Phase-Based Normalized Attack Detector Metric, Mode-3, Random Sequence 128-bits, Reflector LE 1M PHY]	Reflector LE 1M	Mode-3, Random Sequence, 128-bits
CS/NAD/REF/BV-11-C [Phase-Based Normalized Attack Detector Metric, Mode-3, Sounding Sequence 32-bits, Reflector LE 1M PHY]	Reflector LE 1M	Mode-3, Sounding Sequence, 32-bits
CS/NAD/REF/BV-12-C [Phase-Based Normalized Attack Detector Metric, Mode-3, Sounding Sequence 96-bits, Reflector LE 1M PHY]	Reflector LE 1M	Mode-3, Sounding Sequence, 96-bits

TCID	Role/PHY	Mode
CS/NAD/INI/BV-01-C [Phase-Based Normalized Attack Detector Metric, Mode-1, Random Sequence 32-bits, Initiator LE 1M PHY]	Initiator LE 1M	Mode-1, Random Sequence, 32-bits
CS/NAD/INI/BV-02-C [Phase-Based Normalized Attack Detector Metric, Mode-1, Random Sequence 64-bits, Initiator LE 1M PHY]	Initiator LE 1M	Mode-1, Random Sequence, 64-bits
CS/NAD/INI/BV-03-C [Phase-Based Normalized Attack Detector Metric, Mode-1, Random Sequence 96-bits, Initiator LE 1M PHY]	Initiator LE 1M	Mode-1, Random Sequence, 96-bits
CS/NAD/INI/BV-04-C [Phase-Based Normalized Attack Detector Metric, Mode-1, Random Sequence 128-bits, Initiator LE 1M PHY]	Initiator LE 1M	Mode-1, Random Sequence, 128-bits
CS/NAD/INI/BV-05-C [Phase-Based Normalized Attack Detector Metric, Mode-1, Sounding Sequence 32-bits, Initiator LE 1M PHY]	Initiator LE 1M	Mode-1, Sounding Sequence, 32-bits
CS/NAD/INI/BV-06-C [Phase-Based Normalized Attack Detector Metric, Mode-1, Sounding Sequence 96-bits, Initiator LE 1M PHY]	Initiator LE 1M	Mode-1, Sounding Sequence, 96-bits
CS/NAD/INI/BV-07-C [Phase-Based Normalized Attack Detector Metric, Mode-3, Random Sequence 32-bits, Initiator LE 1M PHY]	Initiator LE 1M	Mode-3, Random Sequence, 32-bits
CS/NAD/INI/BV-08-C [Phase-Based Normalized Attack Detector Metric, Mode-3, Random Sequence 64-bits, Initiator LE 1M PHY]	Initiator LE 1M	Mode-3, Random Sequence, 64-bits
CS/NAD/INI/BV-09-C [Phase-Based Normalized Attack Detector Metric, Mode-3, Random Sequence 96-bits, Initiator LE 1M PHY]	Initiator LE 1M	Mode-3, Random Sequence, 96-bits
CS/NAD/INI/BV-10-C [Phase-Based Normalized Attack Detector Metric, Mode-3, Random Sequence 128-bits, Initiator LE 1M PHY]	Initiator LE 1M	Mode-3, Random Sequence, 128-bits
CS/NAD/INI/BV-11-C [Phase-Based Normalized Attack Detector Metric, Mode-3, Sounding Sequence 32-bits, Initiator LE 1M PHY]	Initiator LE 1M	Mode-3, Sounding Sequence, 32-bits
CS/NAD/INI/BV-12-C [Phase-Based Normalized Attack Detector Metric, Mode-3, Sounding Sequence 96-bits, Initiator LE 1M PHY]	Initiator LE 1M	Mode-3, Sounding Sequence, 96-bits
CS/NAD/REF/BV-13-C [Phase-Based Normalized Attack Detector Metric, Mode-1, Random Sequence 32-bits, Reflector LE 2M PHY]	Reflector LE 2M	Mode-1, Random Sequence, 32-bits
CS/NAD/REF/BV-14-C [Phase-Based Normalized Attack Detector Metric, Mode-1, Random Sequence 64-bits, Reflector LE 2M PHY]	Reflector LE 2M	Mode-1, Random Sequence, 64-bits
CS/NAD/REF/BV-15-C [Phase-Based Normalized Attack Detector Metric, Mode-1, Random Sequence 96-bits, Reflector LE 2M PHY]	Reflector LE 2M	Mode-1, Random Sequence, 96-bits
CS/NAD/REF/BV-16-C [Phase-Based Normalized Attack Detector Metric, Mode-1, Random Sequence 128-bits, Reflector LE 2M PHY]	Reflector LE 2M	Mode-1, Random Sequence, 128-bits

TCID	Role/PHY	Mode
CS/NAD/REF/BV-17-C [Phase-Based Normalized Attack Detector Metric, Mode-1, Sounding Sequence 32-bits, Reflector LE 2M PHY]	Reflector LE 2M	Mode-1, Sounding Sequence, 32-bits
CS/NAD/REF/BV-18-C [Phase-Based Normalized Attack Detector Metric, Mode-1, Sounding Sequence 96-bits, Reflector LE 2M PHY]	Reflector LE 2M	Mode-1, Sounding Sequence, 96-bits
CS/NAD/REF/BV-19-C [Phase-Based Normalized Attack Detector Metric, Mode-3, Random Sequence 32-bits, Reflector LE 2M PHY]	Reflector LE 2M	Mode-3, Random Sequence, 32-bits
CS/NAD/REF/BV-20-C [Phase-Based Normalized Attack Detector Metric, Mode-3, Random Sequence 64-bits, Reflector LE 2M PHY]	Reflector LE 2M	Mode-3, Random Sequence, 64-bits
CS/NAD/REF/BV-21-C [Phase-Based Normalized Attack Detector Metric, Mode-3, Random Sequence 96-bits, Reflector LE 2M PHY]	Reflector LE 2M	Mode-3, Random Sequence, 96-bits
CS/NAD/REF/BV-22-C [Phase-Based Normalized Attack Detector Metric, Mode-3, Random Sequence 128-bits, Reflector LE 2M PHY]	Reflector LE 2M	Mode-3, Random Sequence, 128-bits
CS/NAD/REF/BV-23-C [Phase-Based Normalized Attack Detector Metric, Mode-3, Sounding Sequence 32-bits, Reflector LE 2M PHY]	Reflector LE 2M	Mode-3, Sounding Sequence, 32-bits
CS/NAD/REF/BV-24-C [Phase-Based Normalized Attack Detector Metric, Mode-3, Sounding Sequence 96-bits, Reflector LE 2M PHY]	Reflector LE 2M	Mode-3, Sounding Sequence, 96-bits
CS/NAD/INI/BV-13-C [Phase-Based Normalized Attack Detector Metric, Mode-1, Random Sequence 32-bits, Initiator LE 2M PHY]	Initiator LE 2M	Mode-1, Random Sequence, 32-bits
CS/NAD/INI/BV-14-C [Phase-Based Normalized Attack Detector Metric, Mode-1, Random Sequence 64-bits, Initiator LE 2M PHY]	Initiator LE 2M	Mode-1, Random Sequence, 64-bits
CS/NAD/INI/BV-15-C [Phase-Based Normalized Attack Detector Metric, Mode-1, Random Sequence 96-bits, Initiator LE 2M PHY]	Initiator LE 2M	Mode-1, Random Sequence, 96-bits
CS/NAD/INI/BV-16-C [Phase-Based Normalized Attack Detector Metric, Mode-1, Random Sequence 128-bits, Initiator LE 2M PHY]	Initiator LE 2M	Mode-1, Random Sequence, 128-bits
CS/NAD/INI/BV-17-C [Phase-Based Normalized Attack Detector Metric, Mode-1, Sounding Sequence 32-bits, Initiator LE 2M PHY]	Initiator LE 2M	Mode-1, Sounding Sequence, 32-bits
CS/NAD/INI/BV-18-C [Phase-Based Normalized Attack Detector Metric, Mode-1, Sounding Sequence 96-bits, Initiator LE 2M PHY]	Initiator LE 2M	Mode-1, Sounding Sequence, 96-bits
CS/NAD/INI/BV-19-C [Phase-Based Normalized Attack Detector Metric, Mode-3, Random Sequence 32-bits, Initiator LE 2M PHY]	Initiator LE 2M	Mode-3, Random Sequence, 32-bits
CS/NAD/INI/BV-20-C [Phase-Based Normalized Attack Detector Metric, Mode-3, Random Sequence 64-bits, Initiator LE 2M PHY]	Initiator LE 2M	Mode-3, Random Sequence, 64-bits

TCID	Role/PHY	Mode
CS/NAD/INI/BV-21-C [Phase-Based Normalized Attack Detector Metric, Mode-3, Random Sequence 96-bits, Initiator LE 2M PHY]	Initiator LE 2M	Mode-3, Random Sequence, 96-bits
CS/NAD/INI/BV-22-C [Phase-Based Normalized Attack Detector Metric, Mode-3, Random Sequence 128-bits, Initiator LE 2M PHY]	Initiator LE 2M	Mode-3, Random Sequence, 128-bits
CS/NAD/INI/BV-23-C [Phase-Based Normalized Attack Detector Metric, Mode-3, Sounding Sequence 32-bits, Initiator LE 2M PHY]	Initiator LE 2M	Mode-3, Sounding Sequence, 32-bits
CS/NAD/INI/BV-24-C [Phase-Based Normalized Attack Detector Metric, Mode-3, Sounding Sequence 96-bits, Initiator LE 2M PHY]	Initiator LE 2M	Mode-3, Sounding Sequence, 96-bits
CS/NAD/REF/BV-25-C [Phase-Based Normalized Attack Detector Metric, Mode-1, Random Sequence 32-bits, Reflector LE 2M 2BT PHY]	Reflector LE 2M 2BT	Mode-1, Random Sequence, 32-bits
CS/NAD/REF/BV-26-C [Phase-Based Normalized Attack Detector Metric, Mode-1, Random Sequence 64-bits, Reflector LE 2M 2BT PHY]	Reflector LE 2M 2BT	Mode-1, Random Sequence, 64-bits
CS/NAD/REF/BV-27-C [Phase-Based Normalized Attack Detector Metric, Mode-1, Random Sequence 96-bits, Reflector LE 2M 2BT PHY]	Reflector LE 2M 2BT	Mode-1, Random Sequence, 96-bits
CS/NAD/REF/BV-28-C [Phase-Based Normalized Attack Detector Metric, Mode-1, Random Sequence 128-bits, Reflector LE 2M 2BT PHY]	Reflector LE 2M 2BT	Mode-1, Random Sequence, 128-bits
CS/NAD/REF/BV-29-C [Phase-Based Normalized Attack Detector Metric, Mode-1, Sounding Sequence 32-bits, Reflector LE 2M 2BT PHY]	Reflector LE 2M 2BT	Mode-1, Sounding Sequence, 32-bits
CS/NAD/REF/BV-30-C [Phase-Based Normalized Attack Detector Metric, Mode-1, Sounding Sequence 96-bits, Reflector LE 2M 2BT PHY]	Reflector LE 2M 2BT	Mode-1, Sounding Sequence, 96-bits
CS/NAD/REF/BV-31-C [Phase-Based Normalized Attack Detector Metric, Mode-3, Random Sequence 32-bits, Reflector LE 2M 2BT PHY]	Reflector LE 2M 2BT	Mode-3, Random Sequence, 32-bits
CS/NAD/REF/BV-32-C [Phase-Based Normalized Attack Detector Metric, Mode-3, Random Sequence 64-bits, Reflector LE 2M 2BT PHY]	Reflector LE 2M 2BT	Mode-3, Random Sequence, 64-bits
CS/NAD/REF/BV-33-C [Phase-Based Normalized Attack Detector Metric, Mode-3, Random Sequence 96-bits, Reflector LE 2M 2BT PHY]	Reflector LE 2M 2BT	Mode-3, Random Sequence, 96-bits
CS/NAD/REF/BV-34-C [Phase-Based Normalized Attack Detector Metric, Mode-3, Random Sequence 128-bits, Reflector LE 2M 2BT PHY]	Reflector LE 2M 2BT	Mode-3, Random Sequence, 128-bits
CS/NAD/REF/BV-35-C [Phase-Based Normalized Attack Detector Metric, Mode-3, Sounding Sequence 32-bits, Reflector LE 2M 2BT PHY]	Reflector LE 2M 2BT	Mode-3, Sounding Sequence, 32-bits
CS/NAD/REF/BV-36-C [Phase-Based Normalized Attack Detector Metric, Mode-3, Sounding Sequence 96-bits, Reflector LE 2M 2BT PHY]	Reflector LE 2M 2BT	Mode-3, Sounding Sequence, 96-bits

TCID	Role/PHY	Mode
CS/NAD/INI/BV-25-C [Phase-Based Normalized Attack Detector Metric, Mode-1, Random Sequence 32-bits, Initiator LE 2M 2BT PHY]	Initiator LE 2M 2BT	Mode-1, Random Sequence, 32-bits
CS/NAD/INI/BV-26-C [Phase-Based Normalized Attack Detector Metric, Mode-1, Random Sequence 64-bits, Initiator LE 2M 2BT PHY]	Initiator LE 2M 2BT	Mode-1, Random Sequence, 64-bits
CS/NAD/INI/BV-27-C [Phase-Based Normalized Attack Detector Metric, Mode-1, Random Sequence 96-bits, Initiator LE 2M 2BT PHY]	Initiator LE 2M 2BT	Mode-1, Random Sequence, 96-bits
CS/NAD/INI/BV-28-C [Phase-Based Normalized Attack Detector Metric, Mode-1, Random Sequence 128-bits, Initiator LE 2M 2BT PHY]	Initiator LE 2M 2BT	Mode-1, Random Sequence, 128-bits
CS/NAD/INI/BV-29-C [Phase-Based Normalized Attack Detector Metric, Mode-1, Sounding Sequence 32-bits, Initiator LE 2M 2BT PHY]	Initiator LE 2M 2BT	Mode-1, Sounding Sequence, 32-bits
CS/NAD/INI/BV-30-C [Phase-Based Normalized Attack Detector Metric, Mode-1, Sounding Sequence 96-bits, Initiator LE 2M 2BT PHY]	Initiator LE 2M 2BT	Mode-1, Sounding Sequence, 96-bits
CS/NAD/INI/BV-31-C [Phase-Based Normalized Attack Detector Metric, Mode-3, Random Sequence 32-bits, Initiator LE 2M 2BT PHY]	Initiator LE 2M 2BT	Mode-3, Random Sequence, 32-bits
CS/NAD/INI/BV-32-C [Phase-Based Normalized Attack Detector Metric, Mode-3, Random Sequence 64-bits, Initiator LE 2M 2BT PHY]	Initiator LE 2M 2BT	Mode-3, Random Sequence, 64-bits
CS/NAD/INI/BV-33-C [Phase-Based Normalized Attack Detector Metric, Mode-3, Random Sequence 96-bits, Initiator LE 2M 2BT PHY]	Initiator LE 2M 2BT	Mode-3, Random Sequence, 96-bits
CS/NAD/INI/BV-34-C [Phase-Based Normalized Attack Detector Metric, Mode-3, Random Sequence 128-bits, Initiator LE 2M 2BT PHY]	Initiator LE 2M 2BT	Mode-3, Random Sequence, 128-bits
CS/NAD/INI/BV-35-C [Phase-Based Normalized Attack Detector Metric, Mode-3, Sounding Sequence 32-bits, Initiator LE 2M 2BT PHY]	Initiator LE 2M 2BT	Mode-3, Sounding Sequence, 32-bits
CS/NAD/INI/BV-36-C [Phase-Based Normalized Attack Detector Metric, Mode-3, Sounding Sequence 96-bits, Initiator LE 2M 2BT PHY]	Initiator LE 2M 2BT	Mode-3, Sounding Sequence, 96-bits

Table 4.5: Phase-Based Normalized Attack Detector Metric test cases

- Test Procedure
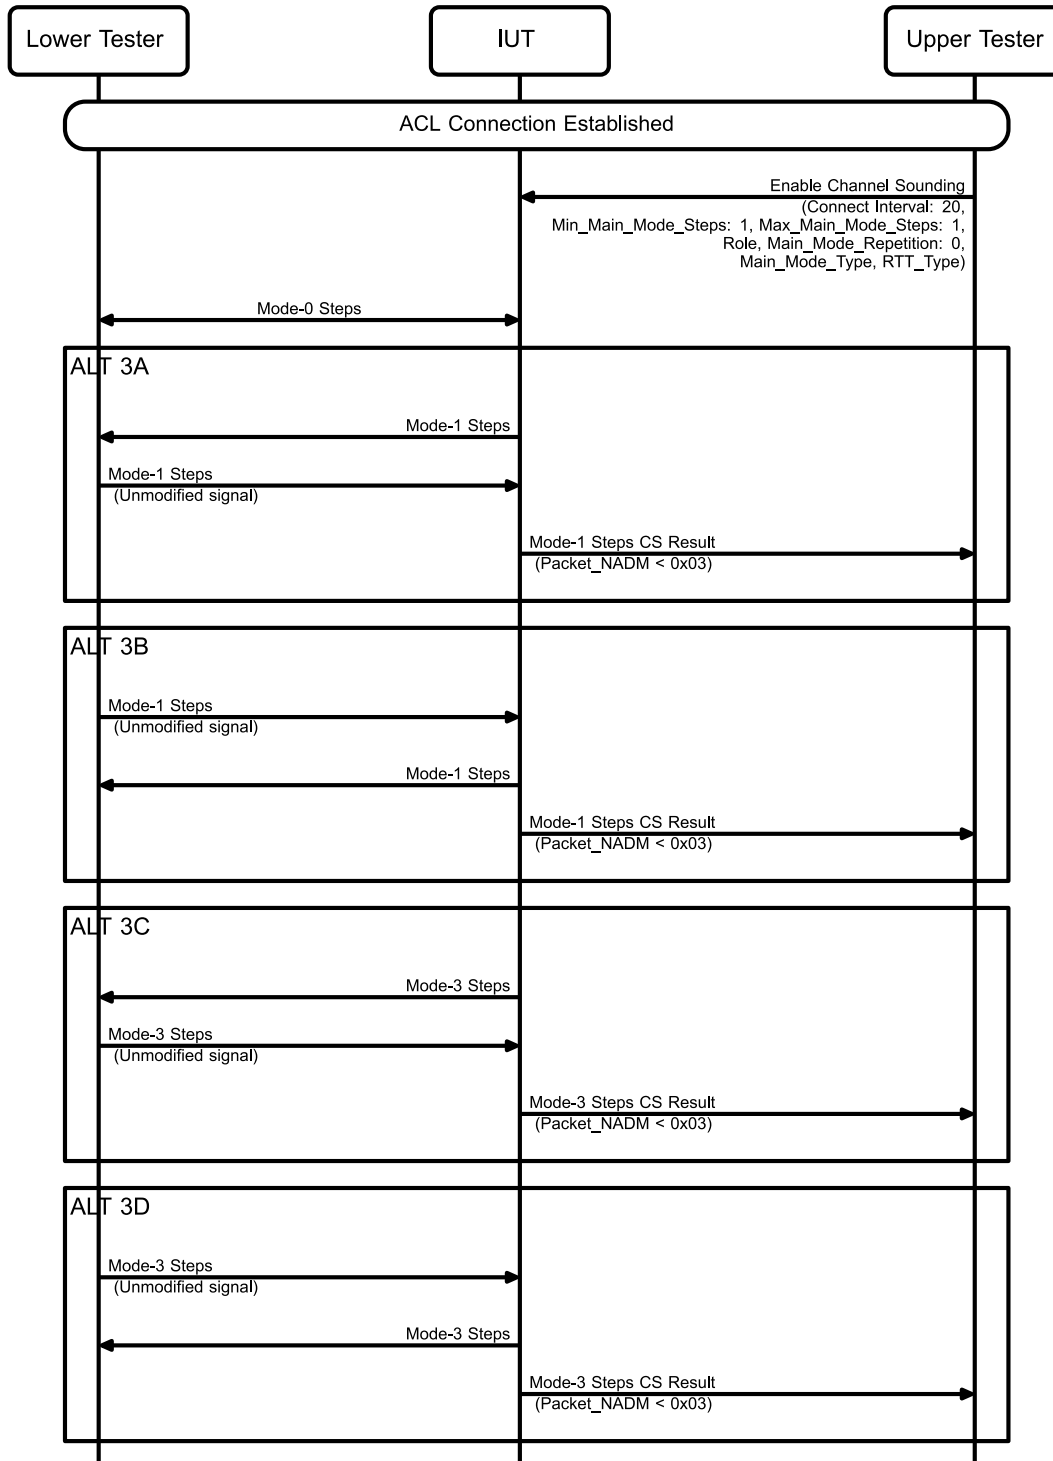
Figure 4.1: Phase-Based Normalized Attack Detector Metric MSC – Page 1 of 3
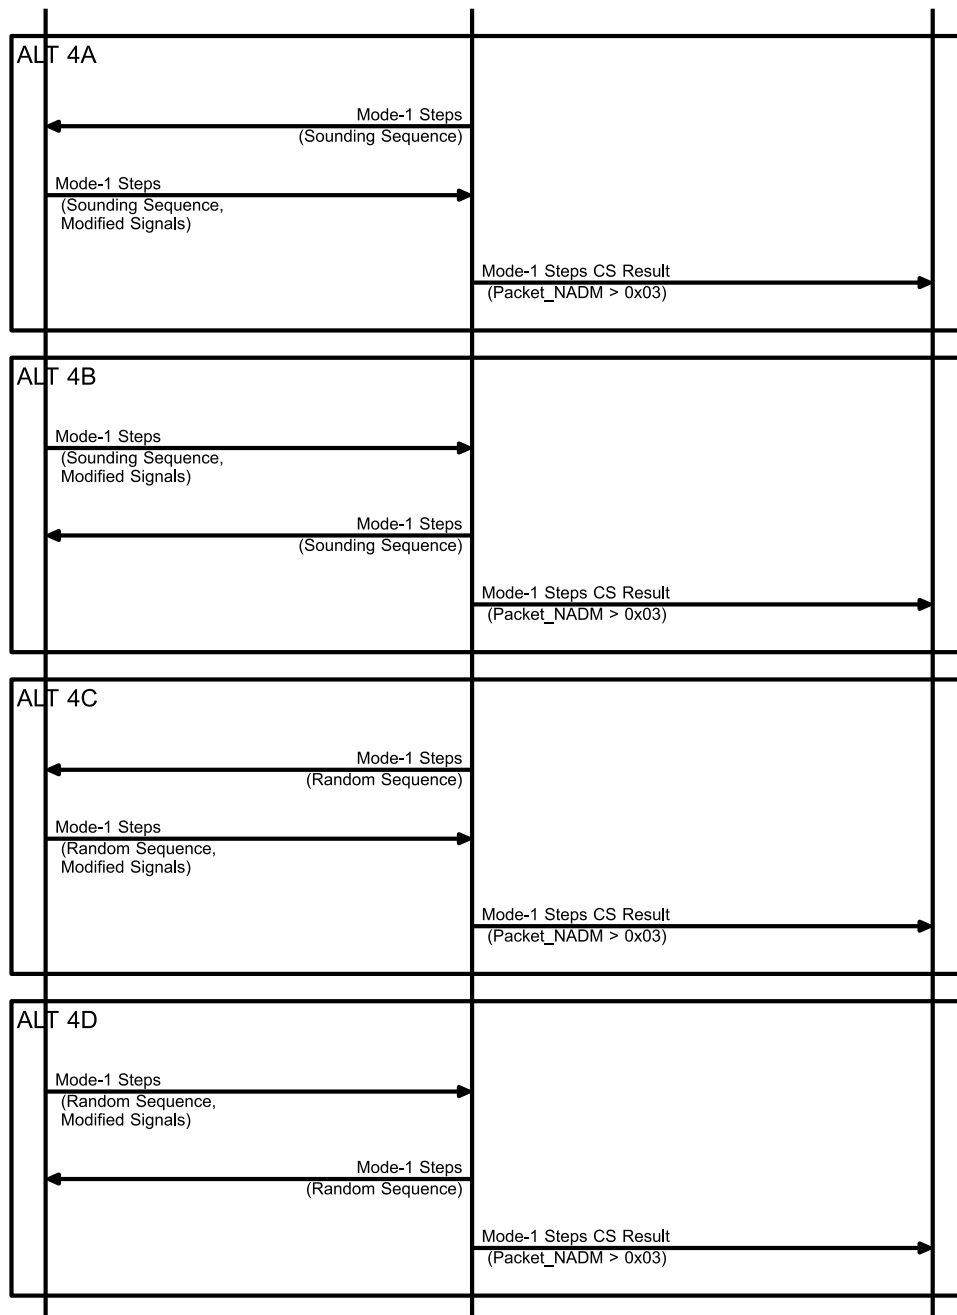
Figure 4.2: Phase-Based Normalized Attack Detector Metric MSC – Page 2 of 3
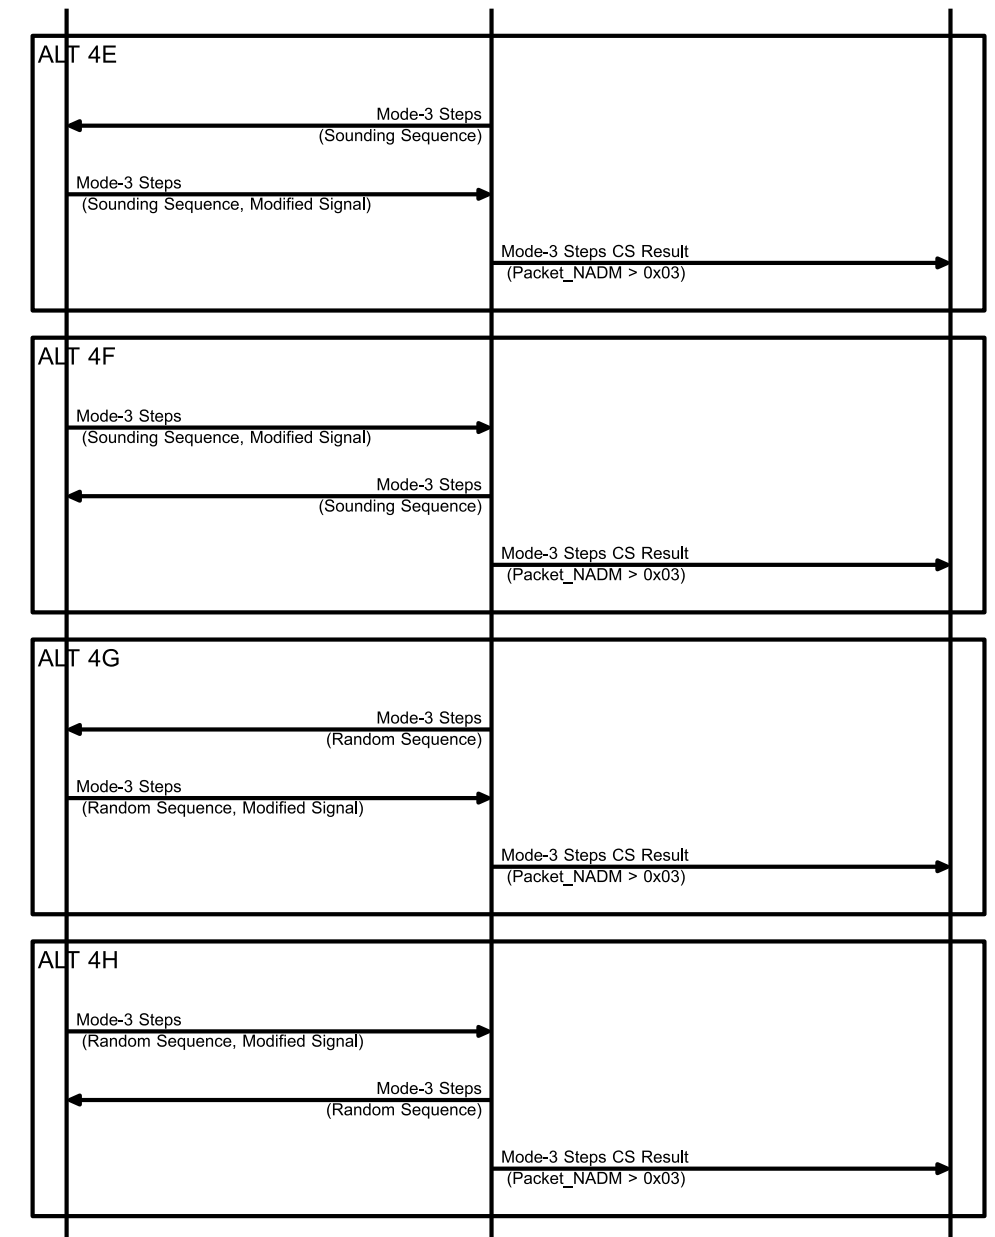
Figure 4.3: Phase-Based Normalized Attack Detector Metric MSC – Page 3 of 3

Repeat steps 1–4 100 times, randomly selecting either step 3 or 4.

1. Using the HCI_LE_CS_Test command, the Upper Tester commands the IUT to enable the Channel Sounding procedure with Main_Mode_Repetition set to 0; role, Main_Mode_Type, and RTT_Type set as specified in Table 4.5; Channel[0] set to channel 20; and all other parameters set to the defaults from Section 4.1.6.3.
2. The Lower Tester and the IUT perform the Mode-0 exchange in Section 4.2.1.
3. Perform alternative 3A, 3B, 3C, or 3D depending on the role and the mode specified in Table 4.5. Alternative 3A (IUT is Initiator using Mode-1):
   3A.1   The IUT sends a Mode-1 CS_SYNC bit sequence.
   3A.2   The Lower Tester sends a Mode-1 CS_SYNC bit sequence. The CS_SYNC bit sequence contains the normal signal of the sequence specified in Table 4.5 modulated using normal GFSK.

3A.3 The IUT reports the Mode-1 Channel Sounding results to the Upper Tester with Packet_NADM < 0x03. The result may include a Packet_Quality with bits 0–3 set to 0b0001 and bits 4–7 > 0.

Alternative 3B (IUT is Reflector using Mode-1):

3B.1 The Lower Tester sends a Mode-1 CS_SYNC bit sequence.

3B.2 The IUT sends a Mode-1 CS_SYNC bit sequence. The CS_SYNC bit sequence contains the normal signal of the sequence specified in Table 4.5 modulated using normal GFSK.

3B.3 The IUT reports the Mode-1 Channel Sounding results to the Upper Tester with Packet_NADM < 0x03. The result may include a Packet_Quality with bits 0–3 set to 0b0001 and bits 4–7 > 0.

Alternative 3C (IUT is Initiator using Mode-3):

3C.1 The IUT sends a Mode-3 CS_SYNC bit sequence followed by a CS Tone.

3C.2 The Lower Tester sends a CS Tone followed by a Mode-3 CS_SYNC bit sequence. The CS_SYNC bit sequence contains the normal signal of the sequence specified in Table 4.5 modulated using normal GFSK.

3C.3 The IUT reports the Mode-3 Channel Sounding results to the Upper Tester with Packet_NADM < 0x03. The result may include a Packet_Quality with bits 0–3 set to 0b0001 and bits 4–7 > 0.

Alternative 3D (IUT is Reflector using Mode-3):

3D.1 The Lower Tester sends a Mode-3 CS_SYNC bit sequence followed by a CS Tone.

3D.2 The IUT sends a CS Tone followed by a Mode-3 CS_SYNC bit sequence. The CS_SYNC bit sequence contains the normal signal of the sequence specified in Table 4.5 modulated using normal GFSK.

3D.3 The IUT reports the Mode-3 Channel Sounding results to the Upper Tester with Packet_NADM < 0x03. The result may include a Packet_Quality with bits 0–3 set to 0b0001 and bits 4–7 > 0.

4. Perform alternative 4A, 4B, 4C, 4D, 4E, 4F, 4G, or 4H depending on the role and the mode specified in Table 4.5.

Alternative 4A (IUT is Initiator using Mode-1 Sounding Sequence):

4A.1 The IUT sends a Mode-1 CS_SYNC bit sequence.

4A.2 The Lower Tester sends a Mode-1 CS_SYNC bit sequence. The CS_SYNC bit sequence contains the sequence specified in Table 4.5. The GFSK-modulated packet signal phase differs from the expected packet signal with the Sounding sequence modified as described in [3] Sections 3.5.3 and 3.5.6.

4A.3 The IUT reports the Mode-1 Channel Sounding results to the Upper Tester with Packet_NADM ≥ 0x03. The result may include a Packet_Quality with bits 0–3 set to 0b0001 and bits 4–7 > 0.

Alternative 4B (IUT is Reflector using Mode-1 Sounding Sequence):

4B.1 The Lower Tester sends a Mode-1 CS_SYNC bit sequence. The CS_SYNC bit sequence contains the sequence specified in Table 4.5. The GFSK-modulated packet signal phase differs from the expected packet signal with the Sounding sequence modified as described in [3] Section 3.5.3.

4B.2 The IUT sends a Mode-1 CS_SYNC bit sequence.

4B.3 The IUT reports the Mode-1 Channel Sounding results to the Upper Tester with Packet_NADM ≥ 0x03. The result may include a Packet_Quality with bits 0–3 set to 0b0001 and bits 4–7 > 0.

Alternative 4C (IUT is Initiator using Mode-1 Random Sequence):

4C.1 The IUT sends a Mode-1 CS_SYNC bit sequence.

4C.2 The Lower Tester sends a Mode-1 CS_SYNC bit sequence. The CS_SYNC bit sequence contains the sequence specified in Table 4.5. The GFSK-modulated

packet signal phase differs from the expected packet phase, with the MITM marker modified as described in [3] Sections 3.5.4 and 3.5.6.

4C.3   The IUT reports the Mode-1 Channel Sounding results to the Upper Tester with Packet_NADM ≥ 0x03. The result may include a Packet_Quality with bits 0–3 set to 0b0001 and bits 4–7 > 0.

Alternative 4D (IUT is Reflector using Mode-1 Random Sequence):

4D.1   The Lower Tester sends a Mode-1 CS_SYNC bit sequence. The CS_SYNC bit sequence contains the sequence specified in Table 4.5. The GFSK-modulated packet signal phase differs from the expected packet phase, with the MITM marker modified as described in [3] Section 3.5.4.

4D.2   The IUT sends a Mode-1 CS_SYNC bit sequence.

4D.3   The IUT reports the Mode-1 Channel Sounding results to the Upper Tester with Packet_NADM ≥ 0x03. The result may include a Packet_Quality with bits 0–3 set to 0b0001 and bits 4–7 > 0.

Alternative 4E (IUT is Initiator using Mode-3 Sounding Sequence):

4E.1   The IUT sends a Mode-3 CS_SYNC bit sequence followed by a CS Tone.

4E.2   The Lower Tester sends a CS Tone followed by a Mode-3 CS_SYNC bit sequence. The GFSK-modulated packet signal phase differs from the expected packet signal, with the Sounding sequence modified as described in [3] Section 3.5.3.

4E.3   The IUT reports the Mode-3 Channel Sounding results to the Upper Tester with Packet_NADM ≥ 0x03. The result may include a Packet_Quality with bits 0–3 set to 0b0001 and bits 4–7 > 0.

Alternative 4F (IUT is Reflector using Mode-3 Sounding Sequence):

4F.1   The Lower Tester sends a Mode-3 CS_SYNC bit sequence followed by a CS Tone. The GFSK-modulated packet signal phase differs from the expected packet signal, with the Sounding sequence modified as described in [3] Section 3.5.3.

4F.2   The IUT sends a CS Tone followed by a Mode-3 CS_SYNC bit sequence.

4F.3   The IUT reports the Mode-3 Channel Sounding results to the Upper Tester with Packet_NADM ≥ 0x03. The result may include a Packet_Quality with bits 0–3 set to 0b0001 and bits 4–7 > 0.

Alternative 4G (IUT is Initiator using Mode-3 Random Sequence):

4G.1   The IUT sends a Mode-3 CS_SYNC bit sequence followed by a CS Tone.

4G.2   The Lower Tester sends a CS Tone followed by a Mode-3 CS_SYNC bit sequence. The CS_SYNC bit sequence contains the sequence specified in Table 4.5. The GFSK-modulated packet signal phase differs from the expected packet phase, with the MITM marker modified as described in [3] Section 3.5.4.

4G.3   The IUT reports the Mode-3 Channel Sounding results to the Upper Tester with Packet_NADM ≥ 0x03. The result may include a Packet_Quality with bits 0–3 set to 0b0001 and bits 4–7 > 0.

Alternative 4H (IUT is Reflector using Mode-3 Random Sequence):

4H.1   The Lower Tester sends a Mode-3 CS_SYNC bit sequence followed by a CS Tone. The CS_SYNC bit sequence contains the Sequence specified in Table 4.5. The GFSK-modulated packet signal phase differs from the expected packet phase, with the MITM marker modified as described in [3] Section 3.5.4.

4H.2   The IUT sends a CS Tone followed by a Mode-3 CS_SYNC bit sequence.

4H.3   The IUT reports the Mode-3 Channel Sounding results to the Upper Tester with Packet_NADM ≥ 0x03. The result may include a Packet_Quality with bits 0–3 set to 0b0001 and bits 4–7 > 0.

- Expected Outcome

Pass verdict

The IUT sends the proper Channel Sounding result in step 3 or 4 with the proper Packet_NADM value for 90 of the 100 reports. The result may include a Packet_Quality with bits 0–3 set to 0b0001 and bits 4–7 > 0.

If the IUT cannot determine the NADM value, then the Packet_NADM is 0xFF.

4.4   PAC

Verify the correct implementation of the Channel Sounding Packets.

4.4.1   Both connected roles

4.4.1.1 Sounding Sequence, Marker Signals

- Test Purpose

Verify that an IUT properly sends a Sounding Sequence with the proper marker signals.

- Reference

[3] 2.4

- Initial Condition

  - An ACL channel with Encryption is established between the IUT and the Lower Tester with a Connection Interval defined in Section 4.1.6.1.

  - The Channel Sounding (Host Support) feature bit is set.

  - The IUT and the Lower Tester have completed the CS Security Start, Remote FAE Exchange, and Capabilities Exchange procedures with the IUT and Lower Tester roles specified in Table 4.6.

- Test Case Configuration

TCID	IUT Role	PHY	Mode / RTT_Type	Marker Signal
CS/PAC/REF/BV-01-C [Sounding Sequence, Marker Signals, Reflector, LE 1M, Mode-1 32-bit]	Reflector	LE 1M	Mode-1 32-bit (0x01)	1100 or 0011 in transmission order between bit positions 0 and 28
CS/PAC/REF/BV-02-C [Sounding Sequence, Marker Signals, Reflector, LE 2M, Mode-1 32-bit]	Reflector	LE 2M	Mode-1 32-bit (0x01)	1100 or 0011 in transmission order between bit positions 0 and 28
CS/PAC/INI/BV-01-C [Sounding Sequence, Marker Signals, Initiator, LE 1M, Mode-1 32-bit]	Initiator	LE 1M	Mode-1 32-bit (0x01)	1100 or 0011 in transmission order between bit positions 0 and 28
CS/PAC/INI/BV-02-C [Sounding Sequence, Marker Signals, Initiator, LE 2M, Mode-1 32-bit]	Initiator	LE 2M	Mode-1 32-bit (0x01)	1100 or 0011 in transmission order between bit positions 0 and 28

TCID	IUT Role	PHY	Mode / RTT_Type	Marker Signal
CS/PAC/REF/BV-03-C [Sounding Sequence, Marker Signals, Reflector, LE 1M, Mode-1 96-bit]	Reflector	LE 1M	Mode-1 96-bit (0x02)	1100 or 0011 in transmission order starts between bits 0 and 63 inclusive 1100 or 0011 in transmission order if the starting location calculated from the Deterministic Random Bit Generator (DRBG) is between bits 67 and 92 inclusive
CS/PAC/REF/BV-04-C [Sounding Sequence, Marker Signals, Reflector, LE 2M, Mode-1 96-bit]	Reflector	LE 2M	Mode-1 96-bit (0x02)	1100 or 0011 in transmission order starts between bits 0 and 63 inclusive 1100 or 0011 in transmission order if the starting location calculated from the DRBG is between bits 67 and 92 inclusive
CS/PAC/INI/BV-03-C [Sounding Sequence, Marker Signals, Initiator, LE 1M, Mode-1 96-bit]	Initiator	LE 1M	Mode-1 96-bit (0x02)	1100 or 0011 in transmission order starts between bits 0 and 63 inclusive 1100 or 0011 in transmission order if the starting location calculated from the DRBG is between bits 67 and 92 inclusive
CS/PAC/INI/BV-04-C [Sounding Sequence, Marker Signals, Initiator, LE 2M, Mode-1 96-bit]	Initiator	LE 2M	Mode-1 96-bit (0x02)	1100 or 0011 in transmission order starts between bits 0 and 63 inclusive 1100 or 0011 in transmission order if the starting location calculated from the DRBG is between bits 67 and 92 inclusive
CS/PAC/REF/BV-05-C [Sounding Sequence, Marker Signals, Reflector, LE 1M, Mode-3 32-bit]	Reflector	LE 1M	Mode-3 32-bit (0x01)	1100 or 0011 in transmission order between bit positions 0 and 28
CS/PAC/REF/BV-06-C [Sounding Sequence, Marker Signals, Reflector, LE 2M, Mode-3 32-bit]	Reflector	LE 2M	Mode-3 32-bit (0x01)	1100 or 0011 in transmission order between bit positions 0 and 28
CS/PAC/INI/BV-05-C [Sounding Sequence, Marker Signals, Initiator, LE 1M, Mode-3 32-bit]	Initiator	LE 1M	Mode-3 32-bit (0x01)	1100 or 0011 in transmission order between bit positions 0 and 28

TCID	IUT Role	PHY	Mode / RTT_Type	Marker Signal
CS/PAC/INI/BV-06-C [Sounding Sequence, Marker Signals, Initiator, LE 2M, Mode-3 32-bit]	Initiator	LE 2M	Mode-3 32-bit (0x01)	1100 or 0011 in transmission order between bit positions 0 and 28
CS/PAC/REF/BV-07-C [Sounding Sequence, Marker Signals, Reflector, LE 1M, Mode-3 96-bit]	Reflector	LE 1M	Mode-3 96-bit (0x02)	1100 or 0011 in transmission order starts between bits 0 and 63 inclusive 1100 or 0011 in transmission order if the starting location calculated from the DRBG is between bits 67 and 92 inclusive
CS/PAC/REF/BV-08-C [Sounding Sequence, Marker Signals, Reflector, LE 2M, Mode-3 96-bit]	Reflector	LE 2M	Mode-3 96-bit (0x02)	1100 or 0011 in transmission order starts between bits 0 and 63 inclusive 1100 or 0011 in transmission order if the starting location calculated from the DRBG is between bits 67 and 92 inclusive
CS/PAC/INI/BV-07-C [Sounding Sequence, Marker Signals, Initiator, LE 1M, Mode-3 96-bit]	Initiator	LE 1M	Mode-3 96-bit (0x02)	1100 or 0011 in transmission order starts between bits 0 and 63 inclusive 1100 or 0011 in transmission order if the starting location calculated from the DRBG is between bits 67 and 92 inclusive
CS/PAC/INI/BV-08-C [Sounding Sequence, Marker Signals, Initiator, LE 2M, Mode-3 96-bit]	Initiator	LE 2M	Mode-3 96-bit (0x02)	1100 or 0011 in transmission order starts between bits 0 and 63 inclusive 1100 or 0011 in transmission order if the starting location calculated from the DRBG is between bits 67 and 92 inclusive

Table 4.6: Sounding Sequence, Marker Signals test cases

• Test Procedure
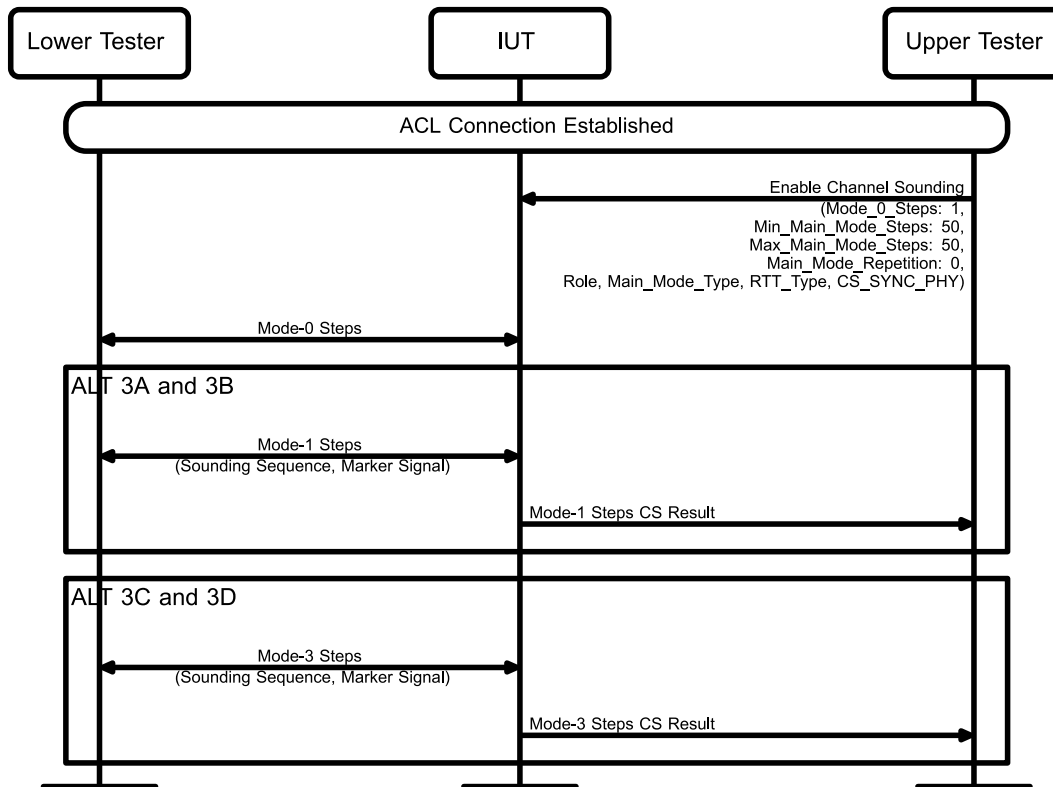
Figure 4.4: Sounding Sequence, Marker Signals MSC

1. The Upper Tester commands the IUT to enable the Channel Sounding procedure with Mode_0_Steps set to 1; Main_Mode_Repetition set to 0; Sub_Mode_Type set to 0xFF; and role, Main_Mode Type, RTT_Type, and CS_SYNC_PHY set as specified in Table 4.6, and all other parameters set to the defaults from Section 4.1.6.2, with the number of channels set to 50.
2. Perform either Alternative 2A or 2B depending on the IUT role.
   Alternative 2A (IUT is Initiator):
       2A.1   The IUT sends a CS_SYNC bit sequence Mode-0.
       2A.2   The Lower Tester waits for T_IP1 and sends the CS_SYNC followed by a CS Tone.
   Alternative 2B (IUT is Reflector):
       2B.1   The Lower Tester sends a CS_SYNC bit sequence Mode-0.
       2B.2   The IUT waits for T_IP1 and sends the CS_SYNC followed by a CS Tone.

Repeat step 3 fifty times.

3. Perform alternative 3A, 3B, 3C, or 3D depending on the IUT role and Main_Mode Type.
   Alternative 3A (IUT is Initiator and Main_Mode Type is 1):
       3A.1   The IUT sends a Mode-1 CS_SYNC bit sequence. The bit sequence includes a sounding sequence with the number of bits and Marker Signal location specified in Table 4.6.
       3A.2   The Lower Tester sends a Mode-1 CS_SYNC bit sequence with a sounding sequence with the number of bits and Marker Signal location specified in Table 4.6.
       3A.3   The IUT reports the Channel Sounding results to the Upper Tester.
   Alternative 3B (IUT is Reflector and Main_Mode Type is 1):
       3B.1   The Lower Tester sends a Mode-1 CS_SYNC bit sequence. The bit sequence includes a sounding sequence with the number of bits and Marker Signal location specified in Table 4.6.

3B.2 The IUT sends a Mode-1 CS_SYNC bit sequence with a sounding sequence with the number of bits and Marker Signal location specified in Table 4.6.

3B.3 The IUT reports the Channel Sounding results to the Upper Tester.

Alternative 3C (IUT is Initiator and Main_Mode Type is 3):

3C.1 The IUT sends a CS_SYNC bit sequence followed by a CS Tone. The bit sequence includes a sounding sequence with the number of bits and Marker Signal location specified in Table 4.6.

3C.2 The Lower Tester sends a CS Tone followed by a CS_SYNC bit sequence. The bit sequence includes a sounding sequence with the number of bits and Marker Signal location specified in Table 4.6.

3C.3 The IUT reports the Channel Sounding results to the Upper Tester.

Alternative 3D (IUT is Reflector and Main_Mode Type is 3):

3D.1 The Lower Tester sends a CS_SYNC bit sequence followed by a CS Tone. The bit sequence includes a sounding sequence with the number of bits and Marker Signal location specified in Table 4.6.

3D.2 The IUT sends a CS Tone followed by a CS_SYNC bit sequence. The bit sequence includes a sounding sequence with the number of bits and Marker Signal location specified in Table 4.6.

3D.3 The IUT reports the Channel Sounding results to the Upper Tester.

- Expected Outcome

  Pass verdict

  The Lower Tester verifies the Access Address in the IUT packet header. The trailer is 1010 if the MSB of the Access Address is a 0, and the trailer is 0101 if the MSB of the Access Address is a 1.

  In steps 2A.1, 2B.2, 3A.1, 3B.2, 3C.1, and 3D.2, the IUT sends the CS_SYNC bit sequence with a preamble that matches the LE Uncoded PHY preamble in [3] Section 2.1.

  In steps 2A.1 and 2B.2, the IUT does not send a sounding sequence in the Mode-0 CS_SYNC bit sequence.

  In steps 3A.1, 3B.2, 3C.1, and 3D.2, the IUT sends a CS_SYNC bit sequence with the correct sounding sequence as generated by the DRBG.

  In steps 3B.2 and 3D.2, the IUT sends a sounding sequence with the length that matches the length of the sounding sequence in steps 3B.1 and 3D.1.

  Fail verdict

  If the RTT Type is 96-bit, then in steps 3A.1, 3B.2, 3C.1, and 3D.2, the marker signal is either between bits 64 or 66 or at bit 93 or higher.

- Notes

  In the 96-bit sounding sequence, the starting bit location of the second marker signal is randomly determined using the DRBG. The Lower Tester and the IUT do not include the second marker signal when the start bit location > 92.

4.4.1.2 Random Sequence

- Test Purpose

  Verify that an IUT properly sends a Random Sequence as specified in Table 4.7.

- Reference

  [3] 2.2.5

- Initial Condition

    - An ACL channel with Encryption is established between the IUT and Lower Tester with a Connection Interval defined in Section 4.1.6.1.

    - The Channel Sounding (Host Support) feature bit is set.

    - The IUT and Lower Tester have completed the CS Security Start, Remote FAE Exchange, and Capabilities Exchange procedures with the IUT role as specified in Table 4.7.

- Test Case Configuration

Test Case	PHY	Mode	IUT Role	Size
CS/PAC/INI/BV-09-C [Random Sequence, LE 1M, Mode-1, 32-bit, Initiator]	LE 1M	1	Initiator (0x00)	32-bit (0x03)
CS/PAC/REF/BV-09-C [Random Sequence, LE 1M, Mode-1, 32-bit, Reflector]	LE 1M	1	Reflector (0x01)	32-bit (0x03)
CS/PAC/INI/BV-10-C [Random Sequence, LE 1M, Mode-1, 64-bit, Initiator]	LE 1M	1	Initiator (0x00)	64-bit (0x04)
CS/PAC/REF/BV-10-C [Random Sequence, LE 1M, Mode-1, 64-bit, Reflector]	LE 1M	1	Reflector (0x01)	64-bit (0x04)
CS/PAC/INI/BV-11-C [Random Sequence, LE 1M, Mode-1, 96-bit, Initiator]	LE 1M	1	Initiator (0x00)	96-bit (0x05)
CS/PAC/REF/BV-11-C [Random Sequence, LE 1M, Mode-1, 96-bit, Reflector]	LE 1M	1	Reflector (0x01)	96-bit (0x05)
CS/PAC/INI/BV-12-C [Random Sequence, LE 1M, Mode-1, 128-bit, Initiator]	LE 1M	1	Initiator (0x00)	128-bit (0x06)
CS/PAC/REF/BV-12-C [Random Sequence, LE 1M, Mode-1, 128-bit, Reflector]	LE 1M	1	Reflector (0x01)	128-bit (0x06)
CS/PAC/INI/BV-13-C [Random Sequence, LE 2M, Mode-1, 32-bit, Initiator]	LE 2M	1	Initiator (0x00)	32-bit (0x03)
CS/PAC/REF/BV-13-C [Random Sequence, LE 2M, Mode-1, 32-bit, Reflector]	LE 2M	1	Reflector (0x01)	32-bit (0x03)
CS/PAC/INI/BV-14-C [Random Sequence, LE 2M, Mode-1, 64-bit, Initiator]	LE 2M	1	Initiator (0x00)	64-bit (0x04)
CS/PAC/REF/BV-14-C [Random Sequence, LE 2M, Mode-1, 64-bit, Reflector]	LE 2M	1	Reflector (0x01)	64-bit (0x04)
CS/PAC/INI/BV-15-C [Random Sequence, LE 2M, Mode-1, 96-bit, Initiator]	LE 2M	1	Initiator (0x00)	96-bit (0x05)
CS/PAC/REF/BV-15-C [Random Sequence, LE 2M, Mode-1, 96-bit, Reflector]	LE 2M	1	Reflector (0x01)	96-bit (0x05)
CS/PAC/INI/BV-16-C [Random Sequence, LE 2M, Mode-1, 128-bit, Initiator]	LE 2M	1	Initiator (0x00)	128-bit (0x06)
CS/PAC/REF/BV-16-C [Random Sequence, LE 2M, Mode-1, 128-bit, Reflector]	LE 2M	1	Reflector (0x01)	128-bit (0x06)
CS/PAC/INI/BV-17-C [Random Sequence, LE 1M, Mode-3, 32-bit, Initiator]	LE 1M	3	Initiator (0x00)	32-bit (0x03)
CS/PAC/REF/BV-17-C [Random Sequence, LE 1M, Mode-3, 32-bit, Reflector]	LE 1M	3	Reflector (0x01)	32-bit (0x03)
CS/PAC/INI/BV-18-C [Random Sequence, LE 1M, Mode-3, 64-bit, Initiator]	LE 1M	3	Initiator (0x00)	64-bit (0x04)

Test Case	PHY	Mode	IUT Role	Size
CS/PAC/REF/BV-18-C [Random Sequence, LE 1M, Mode-3, 64-bit, Reflector]	LE 1M	3	Reflector (0x01)	64-bit (0x04)
CS/PAC/INI/BV-19-C [Random Sequence, LE 1M, Mode-3, 96-bit, Initiator]	LE 1M	3	Initiator (0x00)	96-bit (0x05)
CS/PAC/REF/BV-19-C [Random Sequence, LE 1M, Mode-3, 96-bit, Reflector]	LE 1M	3	Reflector (0x01)	96-bit (0x05)
CS/PAC/INI/BV-20-C [Random Sequence, LE 1M, Mode-3, 128-bit, Initiator]	LE 1M	3	Initiator (0x00)	128-bit (0x06)
CS/PAC/REF/BV-20-C [Random Sequence, LE 1M, Mode-3, 128-bit, Reflector]	LE 1M	3	Reflector (0x01)	128-bit (0x06)
CS/PAC/INI/BV-21-C [Random Sequence, LE 2M, Mode-3, 32-bit, Initiator]	LE 2M	3	Initiator (0x00)	32-bit (0x03)
CS/PAC/REF/BV-21-C [Random Sequence, LE 2M, Mode-3, 32-bit, Reflector]	LE 2M	3	Reflector (0x01)	32-bit (0x03)
CS/PAC/INI/BV-22-C [Random Sequence, LE 2M, Mode-3, 64-bit, Initiator]	LE 2M	3	Initiator (0x00)	64-bit (0x04)
CS/PAC/REF/BV-22-C [Random Sequence, LE 2M, Mode-3, 64-bit, Reflector]	LE 2M	3	Reflector (0x01)	64-bit (0x04)
CS/PAC/INI/BV-23-C [Random Sequence, LE 2M, Mode-3, 96-bit, Initiator]	LE 2M	3	Initiator (0x00)	96-bit (0x05)
CS/PAC/REF/BV-23-C [Random Sequence, LE 2M, Mode-3, 96-bit, Reflector]	LE 2M	3	Reflector (0x01)	96-bit (0x05)
CS/PAC/INI/BV-24-C [Random Sequence, LE 2M, Mode-3, 128-bit, Initiator]	LE 2M	3	Initiator (0x00)	128-bit (0x06)
CS/PAC/REF/BV-24-C [Random Sequence, LE 2M, Mode-3, 128-bit, Reflector]	LE 2M	3	Reflector (0x01)	128-bit (0x06)

Table 4.7: Random Sequence test cases
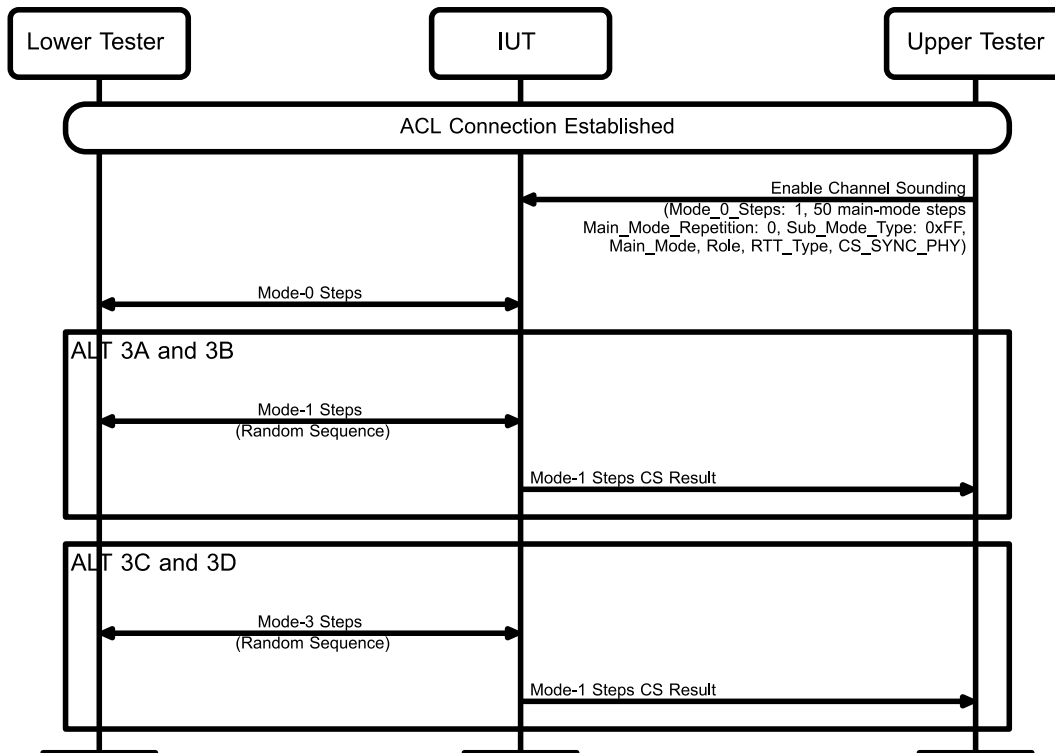
• Test Procedure

Figure 4.5: Random Sequence MSC

1. The Upper Tester commands the IUT to enable the Channel Sounding procedure with Mode_0_Steps set to 1; a configuration that produces 50 Main Mode steps; Main_Mode_Repetition set to 0; Sub_Mode_Type set to 0xFF; and Main_Mode, role, RTT_Type, and CS_SYNC_PHY set as specified in Table 4.7, and all other parameters set to the defaults from Section 4.1.6.2.

2. Perform alternative 2A or 2B depending on the IUT role specified in Table 4.7.
   Alternative 2A (IUT is Initiator):
   - 2A.1 The IUT sends a Mode-0 CS_SYNC bit sequence.
   - 2A.2 The Lower Tester sends the Mode-0 CS_SYNC followed by a CS Tone.
   Alternative 2B (IUT is Reflector):
   - 2B.1 The Lower Tester sends a Mode-0 CS_SYNC bit sequence.
   - 2B.2 The IUT sends the Mode-0 CS_SYNC followed by a CS Tone.

Repeat step 3 to produce the 50 main mode steps.

3. Perform alternative 3A, 3B, 3C, or 3D depending on the IUT role and mode specified in Table 4.7.
   Alternative 3A (IUT is Initiator, Mode-1):
   - 3A.1 The IUT sends a Mode-1 CS_SYNC bit sequence. The bit sequence includes a random sequence with the number of bits specified in Table 4.7.
   - 3A.2 The Lower Tester sends a Mode-1 CS_SYNC bit sequence with a random sequence with the number of octets specified in Table 4.7.
   - 3A.3 The IUT reports the Channel Sounding results to the Upper Tester.
   Alternative 3B (IUT is Reflector, Mode-1):
   - 3B.1 The Lower Tester sends a Mode-1 CS_SYNC bit sequence. The bit sequence includes a random sequence with the number of bits specified in Table 4.7.
   - 3B.2 The IUT sends a Mode-1 CS_SYNC bit sequence with a random sequence with the number of octets specified in Table 4.7.

      3B.3   The IUT reports the Channel Sounding results to the Upper Tester.

    Alternative 3C (IUT is Initiator, Mode-3):

      3C.1   The IUT sends a CS_SYNC bit sequence followed by a CS Tone. The bit sequence includes a random sequence with the number of bits specified in Table 4.7.

      3C.2   The Lower Tester sends a CS Tone followed by a CS_SYNC bit sequence. The bit sequence includes a random sequence with the number of octets specified in Table 4.7.

      3C.3   The IUT reports the Channel Sounding results to the Upper Tester.

    Alternative 3D (IUT is Reflector, Mode-3):

      3D.1   The Lower Tester sends a CS_SYNC bit sequence followed by a CS Tone. The bit sequence includes a random sequence with the number of bits specified in Table 4.7.

      3D.2   The IUT sends a CS Tone followed by a CS_SYNC bit sequence. The bit sequence includes a random sequence with the number of bits specified in Table 4.7.

      3D.3   The IUT reports the Channel Sounding results to the Upper Tester.

- Expected Outcome

  Pass verdict

  The Lower Tester verifies the Access Address in the IUT packet header. The trailer is 1010 if the MSB of the Access Address is a 0, and the trailer is 0101 if the MSB of the Access Address is a 1.

  In steps 2A.1, 2B.2, 3A.1, 3B.2, 3C.1, and 3D.2, the IUT sends the CS_SYNC bit sequence with a preamble that matches the LE Uncoded PHY preamble in [6] Section 2.1.1.

  In steps 2A.1 and 2B.2, the IUT does not send a random sequence in the Mode-0 CS_SYNC bit sequence.

  In steps 3A.1, 3B.2, 3C.1, and 3D.2, the IUT sends a CS_SYNC bit sequence with a random sequence with the number of octets specified in Table 4.7.

  In steps 3B.2 and 3D.2, the IUT sends a random sequence with the length that matches the length of the random sequence in steps 3B.1 and 3D.1.

4.4.1.3 Access Address Quality Indicator

- Test Purpose

  Verify that an IUT reports the proper quality indicator when the AA address is invalid, valid, or no sync packet was sent.

- Reference

  [3] 2.2.2

- Initial Condition

  - An ACL channel with Encryption is established between the IUT and the Lower Tester with a Connection Interval defined in Section 4.1.6.1.

  - The Channel Sounding (Host Support) feature bit is set.

  - The IUT and the Lower Tester have completed the CS Security Start, Remote FAE Exchange, and Capabilities Exchange procedures with the IUT role specified in Table 4.8.

- Test Case Configuration

Test Case	PHY
CS/PAC/REF/BV-25-C [Access Address Quality Indicator, LE 1M]	LE 1M
CS/PAC/REF/BV-26-C [Access Address Quality Indicator, LE 2M]	LE 2M

Table 4.8: Access Address Quality Indicator test cases

- Test Procedure
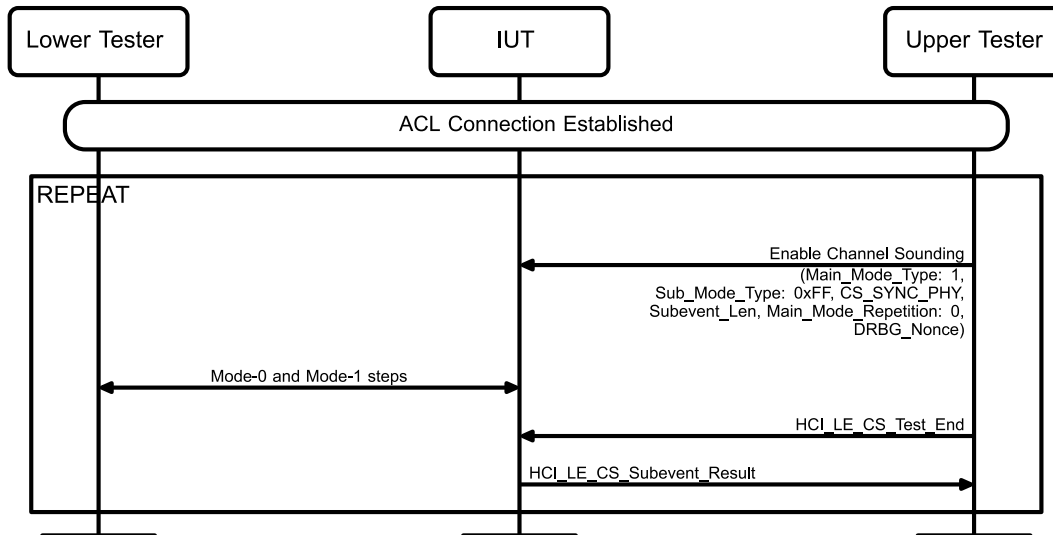
Figure 4.6: Access Address Quality Indicator MSC

1. The Lower Tester initializes the values of testMode, validPkts, missingPktErrors, and bitflipErrors to 0.
2. The Lower Tester sets the subevent number k to 1.
3. The Upper Tester commands the IUT to enable the Channel Sounding procedure Main_Mode_Type set to 1, Sub_Mode_Type set to 0xFF, CS_SYNC_PHY set as specified in Table 4.8, and Subevent_Len and the channel parameters are set in order to generate a single subevent with 128 Main Mode steps, Main_Mode_Repetition set to 0, DRBG_Nonce set to (0x0000 + k), and all other parameters set to the defaults from Section 4.1.6.2.
4. The Lower Tester and the IUT begin transmission and reception of the CS subevent.
   a. If testMode is 1, then the Lower Tester does not send any packets in the Main mode CS steps.
   b. If testMode is 2, then for each main mode CS step, the Lower Tester flips the bit in position (stepIndex-Mode0Steps-1) mod 32 where the bit positions are ordered starting from 0 in order of appearance of the CS Access Address on the air.
5. The Upper Tester sends the HCI_LE_CS_Test_End command.
6. The IUT sends an HCI_LE_CS_Subevent_Result event to the Upper Tester.
7. The Lower Tester calculates the following values, for each testMode value based on the IUT's report.
   a. If testMode is 0, then *validPkts* is incremented by the number of Main Mode steps where the Access Address Quality indicator is 0.
   b. If testMode is 1, then *missingPktErrors* is incremented by the number of Main Mode steps where the Access Address Quality indicator is not 2.
   c. If testMode is 2, then *bitflipErrors* is incremented by the number of steps where the Access Address Quality indicator is 0.

8. The Lower Tester sets k=2 and repeats steps 3–7.
9. The Lower Tester repeats steps 2–8 for testMode = 1,2.

- Expected Outcome

  Pass verdict

  The test passes if missingPktErrors = 0, bitflipErrors ≤ 2, and validPkts/256 ≥ 0.93.

- Notes:

  With a BER of 0.1%, the probability that the CS Access Address is received correctly is around 3.2%. If 256 valid packets are sent, then the probability that less than 93% of the packets are received correctly is:

$$P(validPkts \geq 93\%) = 1 - P(PER < 7\%) = 1 - \sum_{n=0}^{N} \binom{256}{n} 0.032^n (1 - 0.032)^{256-n} \approx 0.17\%$$

where $N = \lfloor 256 \cdot (1 - 0.093) \rfloor$.

With a BER of 0.1%, the probability that any packet with a flipped bit is unflipped is around 0.1%. The probability that two or more such bitflips occur within 256 packets less is:

$$P(bitFlips > 2) = 1 - P(bitFlips \leq 2) = 1 - \sum_{n=0}^{2} \binom{256}{n} 0.001^n (1 - 0.001)^{256-n} \approx 0.23\%$$

4.4.1.4 Sounding Sequence, 32-bit with invalid marker

- Test Purpose

  Verify that an IUT correctly handles an invalid marker for a 32-bit sounding sequence.

- Reference

  [3] 2.4

- Initial Condition

  - An ACL channel with Encryption is established between the IUT and the Lower Tester with a Connection Interval defined in Section 4.1.6.1.

  - The Channel Sounding (Host Support) feature bit is set.

  - The IUT and the Lower Tester have completed the CS Security Start, Remote FAE Exchange, and Capabilities Exchange procedures with the IUT role specified in Table 4.9.

- Test Case Configuration

Test Case	IUT Role
CS/PAC/INI/BV-27-C [Sounding Sequence, 32-bit with invalid marker, Initiator]	Initiator (0x00)
CS/PAC/REF/BV-27-C [Sounding Sequence, 32-bit with invalid marker, Reflector]	Reflector (0x01)

Table 4.9: Sounding Sequence, 32-bit with invalid marker test cases

- Test Procedure

Figure 4.7: Sounding Sequence, 32 bit with invalid marker MSC

1. The Upper Tester commands the IUT to enable the Channel Sounding procedure with Mode_0_Steps set to 1, channel parameters chosen to produce 100 Main Mode steps, Main_Mode set to 1, Sub_Mode_Type set to 0xFF, Main_Mode_Repetition set to 0, RTT_Type set to 0x01 (32-bit Sounding), Role set as specified in Table 4.10, and all other parameters set to the defaults from Section 4.1.6.2.
2. Perform alternative 2A or 2B depending on the IUT role specified in Table 4.10.
   Alternative 2A (IUT is Initiator):
       2A.1   The IUT sends a Mode-0 CS_SYNC bit sequence.
       2A.2   The Lower Tester sends the CS_SYNC followed by a CS Tone.
   Alternative 2B (IUT is Reflector):
       2B.1   The Lower Tester sends a Mode-0 CS_SYNC bit sequence.
       2B.2   The IUT sends the CS_SYNC followed by a CS Tone.
Repeat step 3 one hundred times.

3. Perform alternative 3A or 3B depending on the IUT role specified in Table 4.10.
   Alternative 3A (IUT is Initiator):
       3A.1   The IUT sends a CS_SYNC bit sequence. The bit sequence includes a sounding sequence with the number of bits and Marker Signal location specified in Table 4.10.
       3A.2   The Lower Tester sends a CS_SYNC bit sequence with a sounding sequence. The bit sequence either has a valid marker signal or the Lower Tester randomly chooses

an invalid marker signal. The invalid marker signal is at a starting bit position between 0 and 28 with bits 0b1000, 0b0100, 0b0010, 0b0001, 0b1110, 0b1101, 0b1011, or 0b0111. Each invalid marker signal is tested at least twice.

3A.3   The IUT reports the Channel Sounding results to the Upper Tester.

Alternative 3B (IUT is Reflector):

3B.1   The Lower Tester sends a CS_SYNC bit sequence. The bit sequence includes a sounding sequence with the number of bits and Marker Signal location specified in Table 4.10. The bit sequence either has a valid marker signal or the Lower Tester randomly chooses an invalid marker signal. The invalid marker signal is at a starting bit position between 0 and 28 with bits 0b1000, 0b0100, 0b0010, 0b0001, 0b1110, 0b1101, 0b1011, or 0b0111. Each invalid marker signal is tested at least twice.

3B.2   The IUT sends a CS_SYNC bit sequence with a sounding sequence.

3B.3   The IUT reports the Channel Sounding results to the Upper Tester.

- Expected Outcome

  Pass verdict

  In step 3A.3 or 3B.3, the IUT reports the Channel Sounding results with proper valid or invalid results 95 of the 100 times. If the result is for an invalid marker signal, then the result includes a Packet_Quality with bits 4–7 not set to 0b0000 and/or, if NADM is supported, Packet_NADM > 0x03.

4.4.1.5   Sounding Sequence, 96-bit with invalid marker

- Test Purpose

  Verify that an IUT correctly handles an invalid marker for a 96-bit sounding sequence. The marker is omitted if the starting bit position is greater than 92.

- Reference

  [3] 2.4

- Initial Condition

  - An ACL channel with Encryption is established between the IUT and the Lower Tester with a Connection Interval defined in Section 4.1.6.1.

  - The Channel Sounding (Host Support) feature bit is set.

  - The IUT and the Lower Tester have completed the CS Security Start, Remote FAE Exchange, and Capabilities Exchange procedures with the IUT role specified in Table 4.10.

- Test Case Configuration

Test Case	Role
CS/PAC/INI/BV-28-C [Sounding Sequence, 96-bit with invalid marker, Initiator]	Initiator (0x00)
CS/PAC/REF/BV-28-C [Sounding Sequence, 96-bit with invalid marker, Reflector]	Reflector (0x01)

Table 4.10: Sounding Sequence, 96-bit with invalid marker test cases
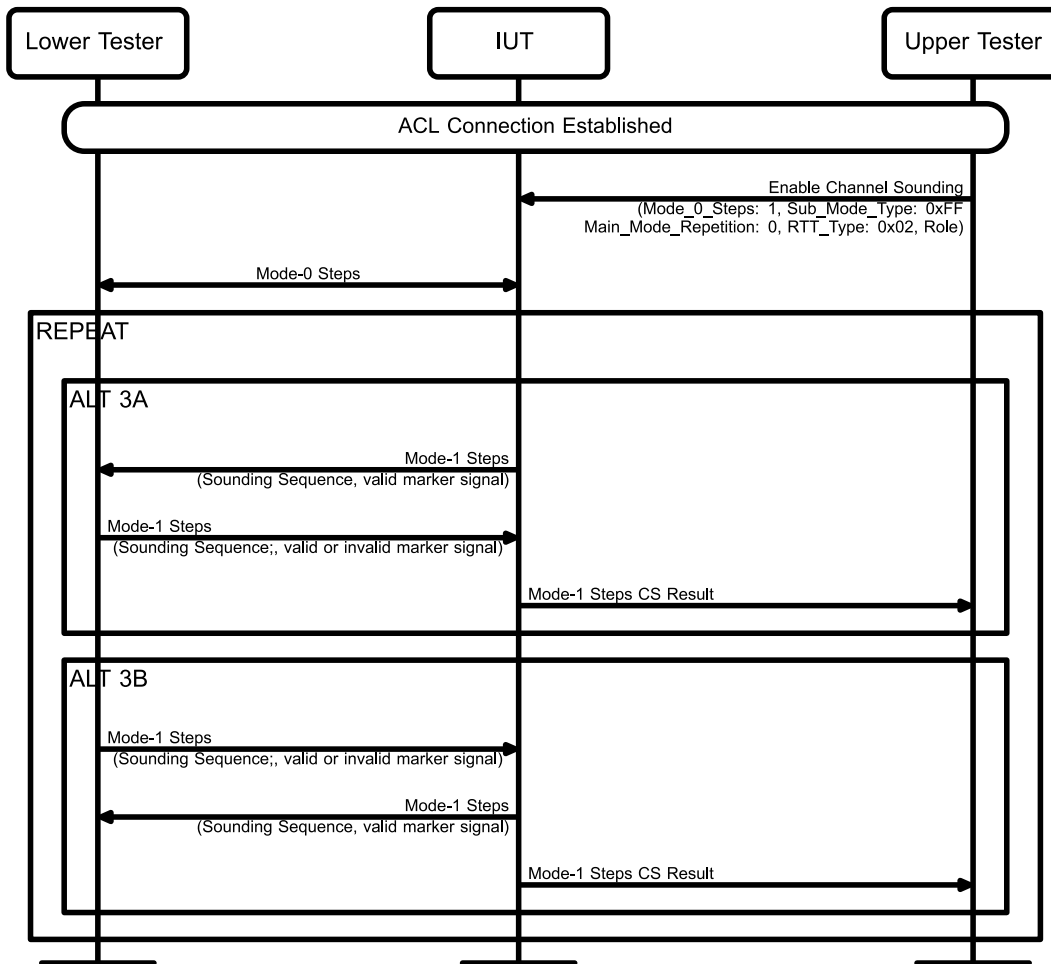
• Test Procedure

Figure 4.8: Sounding Sequence, 96-bit with invalid marker MSC

1. The Upper Tester commands the IUT to enable the Channel Sounding procedure with Mode_0_Steps set to 1, channel parameters chosen to produce 100 Main Mode steps, Main_Mode set to 1, Sub_Mode_Type set to 0xFF, Main_Mode_Repetition set to 0, RTT_Type set to 0x02 (96-bit Sounding), Role set as specified in Table 4.10, and all other parameters set to the defaults from Section 4.1.6.2.
2. Perform alternative 2A or 2B depending on the IUT role specified in Table 4.10.
   Alternative 2A (IUT is Initiator):
   2A.1   The IUT sends a Mode-0 CS_SYNC bit sequence.
   2A.2   The Lower Tester sends the CS_SYNC followed by a CS Tone.
   Alternative 2B (IUT is Reflector):
   2B.1   The Lower Tester sends a Mode-0 CS_SYNC bit sequence.
   2B.2   The IUT sends the CS_SYNC followed by a CS Tone.
Repeat step 3 one hundred times.

3. Perform alternative 3A or 3B depending on the IUT role specified in Table 4.10.
   Alternative 3A (IUT is Initiator):
   3A.1   The IUT sends a CS_SYNC bit sequence. The bit sequence includes a sounding sequence with the number of bits and Marker Signal location specified in Table 4.10.
   3A.2   The Lower Tester sends a CS_SYNC bit sequence with a sounding sequence. The bit sequence either has valid marker signals or the Lower Tester chooses one of the

invalid marker signals noted below. Each of the invalid marker signals is tested at least twice. The invalid marker signal contains valid marker signals except for one of the invalid marker signals noted below.

3A.3 The IUT reports the Channel Sounding results to the Upper Tester.

Alternative 3B (IUT is Reflector):

3B.1 The Lower Tester sends a CS_SYNC bit sequence. The bit sequence includes a sounding sequence with the number of bits and Marker Signal location specified in Table 4.10. The bit sequence either has valid marker signals or the Lower Tester chooses one of the invalid marker signals noted below. Each of the invalid marker signals is tested at least twice. The invalid marker signal contains valid marker signals except for one of the invalid marker signals noted below.

3B.2 The IUT sends a CS_SYNC bit sequence with a sounding sequence.

3B.3 The IUT reports the Channel Sounding results to the Upper Tester.

- Expected Outcome

  Pass verdict

  In step 3A.3 or 3B.3, the IUT reports the Channel Sounding Results with proper valid or invalid results 95 of the 100 times. If the result is for an invalid marker signal, then the result includes a Packet_Quality with bits 4–7 not set to 0b0000 and/or, if NADM is supported, Packet_NADM > 0x03.

- Note

  The invalid marker signals are one of:

  - Starting bit position between 0 and 28 with bits 0b1000, 0b0100, 0b0010, 0b0001, 0b1110, 0b1101, 0b1011, or 0b0111

  - Starting bit position > 92

  - Starting bit position between 67 and 92 inclusive with bits 0b1000, 0b0100, 0b0010, 0b0001, 0b1110, 0b1101, 0b1011, or 0b0111

4.4.1.6   Channel Index Selection Algorithm #3b

- Test Purpose

  Verify that an IUT correctly uses the Channel Index Selection Algorithm #3b when executing the Channel Sounding procedure.

- Reference

  [3] 4.1.4.1

- Initial Condition

  - An ACL channel with Encryption is established between the IUT and the Lower Tester with a Connection Interval defined in Section 4.1.6.1.

  - The Channel Sounding (Host Support) feature bit is set.

  - The IUT and the Lower Tester have completed the CS Security Start and Capabilities Exchange procedures with the IUT role specified in Table 4.11.

  - The Lower Tester FAE Table is defined by the TSPX_cs_remote_fae_table IXIT value.

- Test Case Configuration

TCID	Role
CS/PAC/REF/BV-29-C [Channel Index Selection Algorithm #3b, Reflector]	Reflector
CS/PAC/INI/BV-29-C [Channel Index Selection Algorithm #3b, Initiator]	Initiator

Table 4.11: Channel Index Selection Algorithm #3b test cases

- Test Procedure
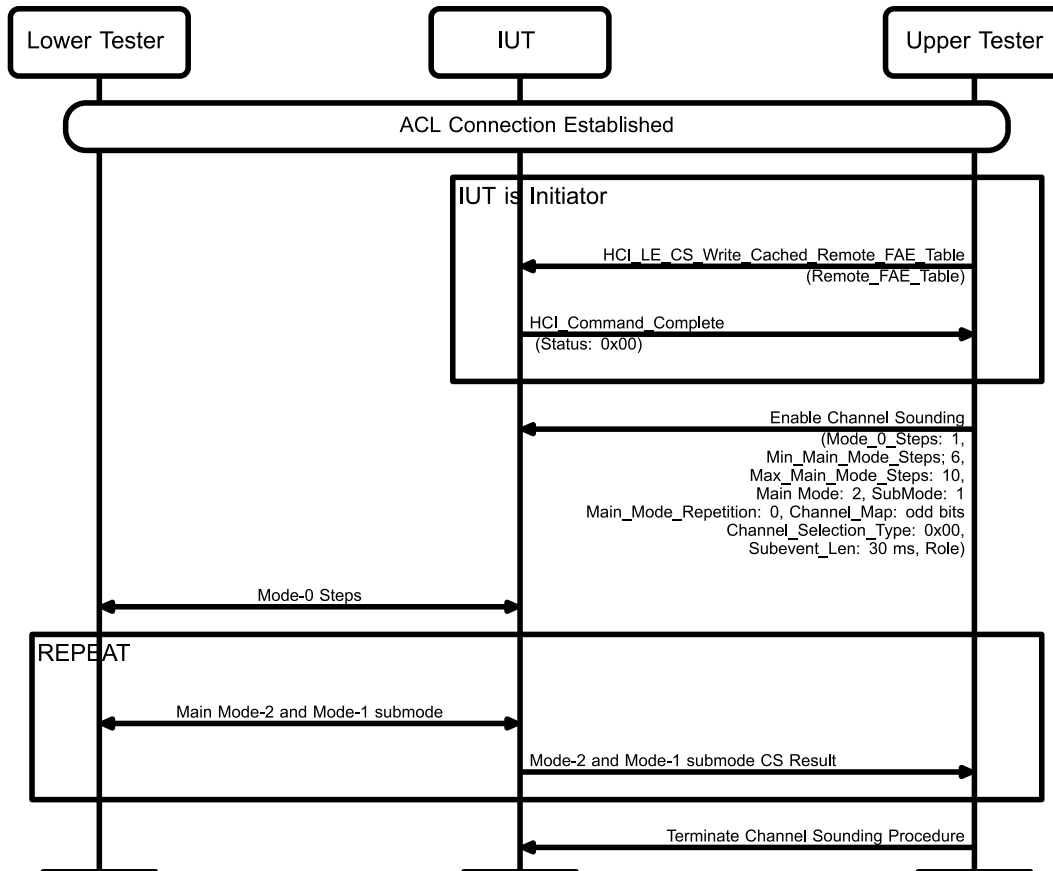
Figure 4.9: Channel Index Selection Algorithm #3b MSC

1. If the IUT is the Initiator, then the Upper Tester sends the HCI_LE_CS_Write_Cached_Remote_FAE_Table command to the IUT with Connection_Handle set to the handle of the connection, Remote_FAE_Table set to TSPX_cs_remote_fae_table, and receives a successful HCI_Command_Complete event in response.
2. The Upper Tester commands the IUT to enable the Channel Sounding procedure with Mode_0_Steps set to 1, Min_Main_Mode_Steps set to 6, Max_Main_Mode_Steps set to 10, Main_Mode set to 2, Sub_Mode set to 1, Main_Mode_Repetition set to 0, Channel_Map set with each odd channel bit set, Channel_Selection_Type set to 0x00, and Subevent_Len set to 30 ms, role specified in Table 4.11, and all other parameters in Section 4.1.6.2.
3. The Lower Tester and the IUT performs the Mode-0 exchange in Section 4.2.1.

Repeat steps 4–6 eight times.

4. The IUT and the Lower Tester exchange Main_Mode Mode-2 CS Tones and Submode Mode-1 CS_SYNC.

5. The IUT reports the Channel Sounding results to the Upper Tester with the channels used in the main or Sub_Mode exchanges in step 4.
6. The Upper Tester commands the IUT to terminate the Channel Sounding procedure.
7. Repeat steps 2–6 with the Channel_Map set to each even channel bit set in step 2.

- Expected Outcome

    Pass verdict

    In step 3, the IUT only sends Mode-0 CS_SYNC on the odd bit channels in the first round and the even bit channels in the second round using CSA #3a.

    In step 4, the IUT only sends CS_SYNC and CS Tones on the odd bit channels in the first round and the even bit channels in the second round using CSA #3b.

    In step 5, the IUT reports the odd or even channels used in step 4.

    At each channel hop, each index is used only once. The channel will not be repeated until all channels have been used.

4.4.1.7 Channel Index Selection Algorithm #3c

- Test Purpose

    Verify that an IUT correctly uses the Channel Index Selection Algorithm #3c when executing the Channel Sounding procedure.

- Reference

    [3] 3.3

- Initial Condition

    - An ACL channel with Encryption is established between the IUT and the Lower Tester with a Connection Interval defined in Section 4.1.6.1.

    - The Channel Sounding (Host Support) feature bit is set.

    - The IUT and the Lower Tester have completed the CS Security Start and Capabilities Exchange procedures with the IUT role specified in Table 4.12.

    - The Lower Tester FAE Table is defined by the TSPX_cs_remote_fae_table IXIT value.

- Test Case Configuration

TCID	Role	CSA #3c Shape
CS/PAC/REF/BV-30-C [Channel Index Selection Algorithm #3c, Reflector, Hat]	Reflector	Hat (0x00)
CS/PAC/INI/BV-30-C [Channel Index Selection Algorithm #3c, Initiator, Hat]	Initiator	Hat (0x00)
CS/PAC/REF/BV-31-C [Channel Index Selection Algorithm #3c, Reflector, X Shape]	Reflector	X Shape (0x01)
CS/PAC/INI/BV-31-C [Channel Index Selection Algorithm #3c, Initiator, X Shape]	Initiator	X Shape (0x01)

Table 4.12: Channel Index Selection Algorithm #3c test cases

- Test Procedure
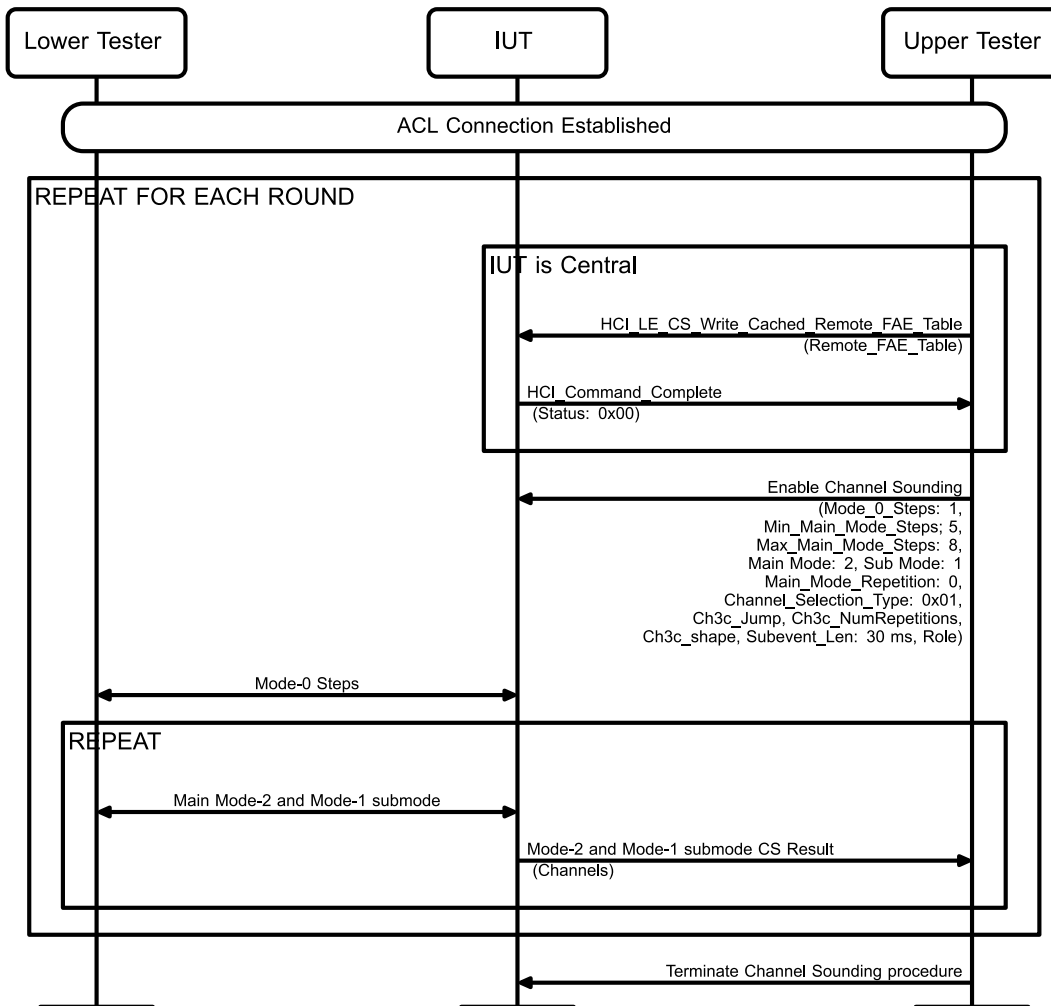
Figure 4.10: Channel Index Selection Algorithm #3c MSC

Repeat steps 1–5 for each round in Table 4.13.

1. If the IUT is the Initiator, then the Upper Tester sends the HCI_LE_CS_Write_Cached_Remote_FAE_Table command to the IUT with Connection_Handle set to the handle of the connection, Remote_FAE_Table set to TSPX_cs_remote_fae_table, and receives a successful HCI_Command_Complete event in response.
2. The Upper Tester commands the IUT to enable the Channel Sounding procedure with Mode_0_Steps set to 1, Min_Main_Mode_Steps set to 5, Max_Main_Mode_Steps set to 8, Main_Mode set to 2, Sub_Mode set to 1, Main_Mode_Repetition set to 0, Channel_Selection_Type set to 0x01, and Subevent_Len set to 30 ms, Ch3c_Jump and Ch3c_NumRepetitions set as specified in Table 4.13, Ch3c_shape and Role set as specified in Table 4.12, and all other parameters in Section 4.1.6.2.
3. The Lower Tester and the IUT perform the Mode-0 exchange in Section 4.2.1.

Repeat steps 4 and 5 eight times.

4. The IUT and the Lower Tester exchange Main_Mode Mode-2 CS Tones and Submode Mode-1 CS_SYNC.
5. The IUT reports the Channel Sounding results to the Upper Tester with the channels used in the main or Sub_Mode exchanges in step 4.

6.   The Upper Tester commands the IUT to terminate the Channel Sounding procedure.

Round	Channel Jump	Num Repetitions
1	2	1
2	3	1
3	4	1
4	4	2
5	5	1
6	6	1
7	7	1
8	7	3
9	8	3

Table 4.13: Channel Index Selection Algorithm #3c rounds

- Expected Outcome

  Pass verdict

  In step 3, the IUT sends Mode-0 CS_SYNC on the proper channels using CSA #3a.

  In step 4, the IUT only sends CS_SYNC and Tones on the channels per the Channel selection algorithm #3c.

  In step 5, the IUT reports the channels used in step 4 and the packet PCT. The PCT values are within the nominal range defined in [3] Section 3.3.1.

$$SS\_PCT_1 = \varphi\left(t, +f\right) = \left(\sum_{n=0}^{L} S_{rf\_b}\left(n,t\right) \times e^{-j2\pi f n T_s}\right)$$

$$SS\_PCT_2 = \varphi\left(t, -f\right) = \left(\sum_{n=0}^{L} S_{rf\_b}\left(n,t\right) \times e^{+j2\pi f n T_s}\right)$$

  The hop sequence is the correct sequence based on the parameters in step 2. The channels are verified to be the correct channels generated using CSA #3c.

4.4.1.8   Main Mode Repetition, Verify Main Mode Repeated steps

- Test Purpose

  Verify that an IUT properly repeats the main mode steps when there are fewer unrepeated steps than the main mode repetition value. If a subevent only contains two steps that were not repeated and there are three main mode steps repeated, then the next subevent only repeats the two steps and then proceeds with the main mode steps.

- Reference

  [3] 4.4.4

- Initial Condition

  - An ACL channel with Encryption is established between the IUT and the Lower Tester with a Connection Interval defined in Section 4.1.6.1.

  - The Channel Sounding (Host Support) feature bit is set.

- The IUT and the Lower Tester have completed the CS Security Start and Capabilities Exchange procedures with the IUT role as specified in Table 4.14.

• Test Case Configuration

Test Case ID	IUT CS Role
CS/PAC/INI/BV-32-C [Main Mode Repetition, Verify Main Mode Repeated steps, Initiator]	Initiator
CS/PAC/REF/BV-32-C [Main Mode Repetition, Verify Main Mode Repeated steps, Reflector]	Reflector

Table 4.14: Main Mode Repetition, Verify Main Mode Repeated steps test cases

• Test Procedure
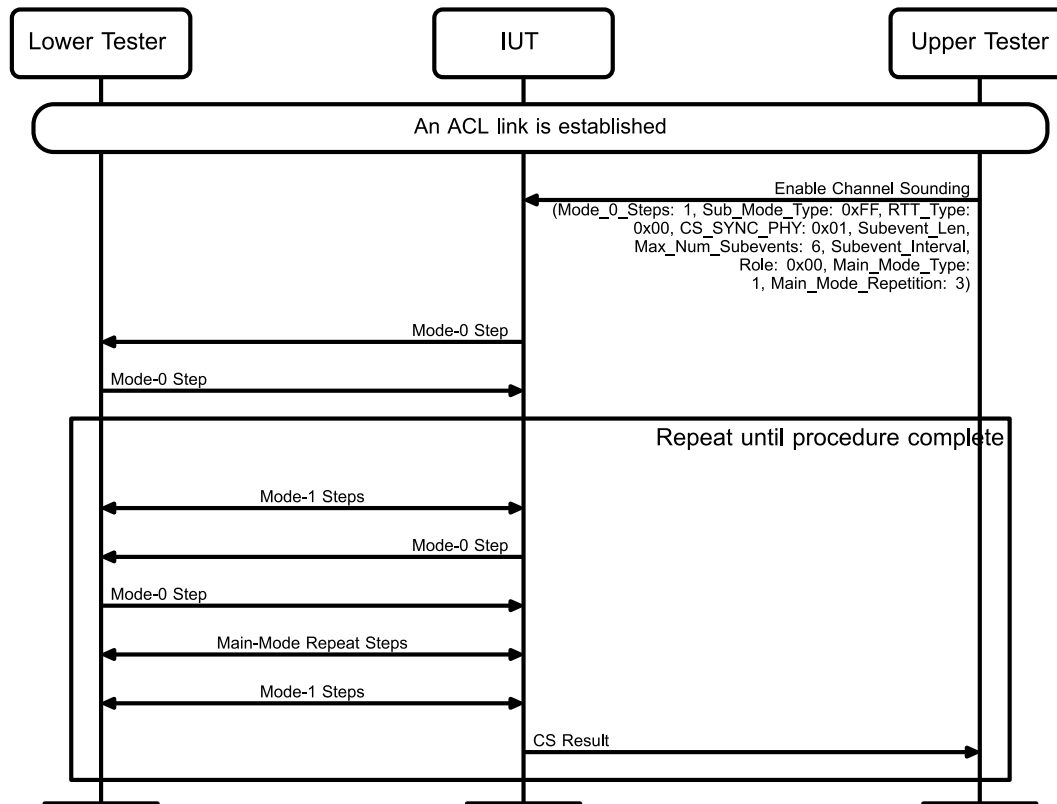
Figure 4.11: Main Mode Repetition, Verify Main Mode Repeated steps MSC

1. The Upper Tester commands the IUT to enable the Channel Sounding procedure with Mode_0_Steps set to 1, Main_Mode_Repetition set to 3, Main_Mode_Type set to 1, Sub_Mode_Type set to 0xFF, RTT_Type set to 0x00, CS_SYNC_PHY set to 0x01, Subevent Len set to 2000 μs, Max_Num_Subevents = 6, Subevent_Interval = 2.5 ms and all other parameters set to the defaults from Section 4.1.6.2.
2. The IUT and the Lower Tester exchange 1 Mode-0 exchange.
3. The IUT and the Lower Tester exchange Mode-1 steps until the subevent ends.
4. The IUT and the Lower Tester exchange 1 Mode-0 exchange.
5. The IUT and the Lower Tester first send up to three Main-Mode repeat steps. The repeat steps are up to three of the main-mode steps from the previous Mode-1 exchange that was not part of a repeat. Any remaining steps of the subevent are Mode-1 exchanges.
6. The IUT reports the Channel Sounding results to the Upper Tester.

Repeat steps 4–6 until the procedure is complete.

- Expected Outcome

    Pass verdict

    In step 5, the IUT sends Mode-1 repeat steps that are up to the last three Mode-1 steps from the previous subevent.

    Fail verdict

    In step 5, the IUT sends a Mode-1 repeat step that was a repeat step from the previous subevent.

4.5   RTT

Verify the correct Round Trip Time calculations.

4.5.1   INI

4.5.1.1 Channel Sounding – RTT, Initiator

- Test Purpose

    Verify that an IUT properly compensates for internal delays and clock drift and implements frequency-based time compensation.

- Reference

    [3] 3.1

- Initial Condition

    - The Lower Tester's transmit power is adjusted such that the input power to the IUT receiver is -70 dBm.

    - The FFO of the Lower Tester, as applied to the RF frequencies and the symbol and link layer timing, is set to 50 ppm. This value is initialized to 0 ppm for the first pass of the test procedure.

- Test Case Configuration

TCID	PHY	Mode	RTT Type Parameters
CS/RTT/INI/BV-01-C [Channel Sounding – RTT, Initiator, LE 1M, Mode-1, RTT AA-Only]	LE 1M	Mode-1	AA-Only
CS/RTT/INI/BV-02-C [Channel Sounding – RTT, Initiator, LE 1M, Mode-3, RTT AA-Only]	LE 1M	Mode-3	AA-Only
CS/RTT/INI/BV-03-C [Channel Sounding – RTT, Initiator, LE 2M, Mode-1, RTT AA-Only]	LE 2M	Mode-1	AA-Only
CS/RTT/INI/BV-04-C [Channel Sounding – RTT, Initiator, LE 2M, Mode-3, RTT AA-Only]	LE 2M	Mode-3	AA-Only
CS/RTT/INI/BV-37-C [Channel Sounding – RTT, Initiator, LE 2M 2BT, Mode-1, RTT AA-Only]	LE 2M 2BT	Mode-1	AA-Only

TCID	PHY	Mode	RTT Type Parameters
CS/RTT/INI/BV-38-C [Channel Sounding – RTT, Initiator, LE 2M 2BT, Mode-3, RTT AA-Only]	LE 2M 2BT	Mode-3	AA-Only
CS/RTT/INI/BV-13-C [Channel Sounding – RTT, Initiator, LE 1M, Mode-1, RTT 32-bit Sounding Sequence]	LE 1M	Mode-1	32-bit Sounding Sequence
CS/RTT/INI/BV-14-C [Channel Sounding – RTT, Initiator, LE 1M, Mode-3, RTT 32-bit Sounding Sequence]	LE 1M	Mode-3	32-bit Sounding Sequence
CS/RTT/INI/BV-15-C [Channel Sounding – RTT, Initiator, LE 2M, Mode-1, RTT 32-bit Sounding Sequence]	LE 2M	Mode-1	32-bit Sounding Sequence
CS/RTT/INI/BV-16-C [Channel Sounding – RTT, Initiator, LE 2M, Mode-3, RTT 32-bit Sounding Sequence]	LE 2M	Mode-3	32-bit Sounding Sequence
CS/RTT/INI/BV-39-C [Channel Sounding – RTT, Initiator, LE 2M 2BT, Mode-1, RTT 32-bit Sounding Sequence]	LE 2M 2BT	Mode-1	32-bit Sounding Sequence
CS/RTT/INI/BV-40-C [Channel Sounding – RTT, Initiator, LE 2M 2BT, Mode-3, RTT 32-bit Sounding Sequence]	LE 2M 2BT	Mode-3	32-bit Sounding Sequence
CS/RTT/INI/BV-17-C [Channel Sounding – RTT, Initiator, LE 1M, Mode-1, RTT 96-bit Sounding Sequence]	LE 1M	Mode-1	96-bit Sounding Sequence
CS/RTT/INI/BV-18-C [Channel Sounding – RTT, Initiator, LE 1M, Mode-3, RTT 96-bit Sounding Sequence]	LE 1M	Mode-3	96-bit Sounding Sequence
CS/RTT/INI/BV-19-C [Channel Sounding – RTT, Initiator, LE 2M, Mode-1, RTT 96-bit Sounding Sequence]	LE 2M	Mode-1	96-bit Sounding Sequence
CS/RTT/INI/BV-20-C [Channel Sounding – RTT, Initiator, LE 2M, Mode-3, RTT 96-bit Sounding Sequence]	LE 2M	Mode-3	96-bit Sounding Sequence
CS/RTT/INI/BV-41-C [Channel Sounding – RTT, Initiator, LE 2M 2BT, Mode-1, RTT 96-bit Sounding Sequence]	LE 2M 2BT	Mode-1	96-bit Sounding Sequence
CS/RTT/INI/BV-42-C [Channel Sounding – RTT, Initiator, LE 2M	LE 2M 2BT	Mode-3	96-bit Sounding Sequence

TCID	PHY	Mode	RTT Type Parameters
2BT, Mode-3, RTT 96-bit Sounding Sequence]			
CS/RTT/INI/BV-21-C [Channel Sounding – RTT, Initiator, LE 1M, Mode-1, RTT 32-bit Random Sequence]	LE 1M	Mode-1	32-bit Random Sequence
CS/RTT/INI/BV-22-C [Channel Sounding – RTT, Initiator, LE 1M, Mode-3, RTT 32-bit Random Sequence]	LE 1M	Mode-3	32-bit Random Sequence
CS/RTT/INI/BV-23-C [Channel Sounding – RTT, Initiator, LE 2M, Mode-1, RTT 32-bit Random Sequence]	LE 2M	Mode-1	32-bit Random Sequence
CS/RTT/INI/BV-24-C [Channel Sounding – RTT, Initiator, LE 2M, Mode-3, RTT 32-bit Random Sequence]	LE 2M	Mode-3	32-bit Random Sequence
CS/RTT/INI/BV-43-C [Channel Sounding – RTT, Initiator, LE 2M 2BT, Mode-1, RTT 32-bit Random Sequence]	LE 2M 2BT	Mode-1	32-bit Random Sequence
CS/RTT/INI/BV-44-C [Channel Sounding – RTT, Initiator, LE 2M 2BT, Mode-3, RTT 32-bit Random Sequence]	LE 2M 2BT	Mode-3	32-bit Random Sequence
CS/RTT/INI/BV-25-C [Channel Sounding – RTT, Initiator, LE 1M, Mode-1, RTT 64-bit Random Sequence]	LE 1M	Mode-1	64-bit Random Sequence
CS/RTT/INI/BV-26-C [Channel Sounding – RTT, Initiator, LE 1M, Mode-3, RTT 64-bit Random Sequence]	LE 1M	Mode-3	64-bit Random Sequence
CS/RTT/INI/BV-27-C [Channel Sounding – RTT, Initiator, LE 2M, Mode-1, RTT 64-bit Random Sequence]	LE 2M	Mode-1	64-bit Random Sequence
CS/RTT/INI/BV-28-C [Channel Sounding – RTT, Initiator, LE 2M, Mode-3, RTT 64-bit Random Sequence]	LE 2M	Mode-3	64-bit Random Sequence
CS/RTT/INI/BV-45-C [Channel Sounding – RTT, Initiator, LE 2M 2BT, Mode-1, RTT 64-bit Random Sequence]	LE 2M 2BT	Mode-1	64-bit Random Sequence
CS/RTT/INI/BV-46-C [Channel Sounding – RTT, Initiator, LE 2M 2BT, Mode-3, RTT 64-bit Random Sequence]	LE 2M 2BT	Mode-3	64-bit Random Sequence

TCID	PHY	Mode	RTT Type Parameters
CS/RTT/INI/BV-29-C [Channel Sounding – RTT, Initiator, LE 1M, Mode-1, RTT 96-bit Random Sequence]	LE 1M	Mode-1	96-bit Random Sequence
CS/RTT/INI/BV-30-C [Channel Sounding – RTT, Initiator, LE 1M, Mode-3, RTT 96-bit Random Sequence]	LE 1M	Mode-3	96-bit Random Sequence
CS/RTT/INI/BV-31-C [Channel Sounding – RTT, Initiator, LE 2M, Mode-1, RTT 96-bit Random Sequence]	LE 2M	Mode-1	96-bit Random Sequence
CS/RTT/INI/BV-32-C [Channel Sounding – RTT, Initiator, LE 2M, Mode-3, RTT 96-bit Random Sequence]	LE 2M	Mode-3	96-bit Random Sequence
CS/RTT/INI/BV-47-C [Channel Sounding – RTT, Initiator, LE 2M 2BT, Mode-1, RTT 96-bit Random Sequence]	LE 2M 2BT	Mode-1	96-bit Random Sequence
CS/RTT/INI/BV-48-C [Channel Sounding – RTT, Initiator, LE 2M 2BT, Mode-3, RTT 96-bit Random Sequence]	LE 2M 2BT	Mode-3	96-bit Random Sequence
CS/RTT/INI/BV-33-C [Channel Sounding – RTT, Initiator, LE 1M, Mode-1, RTT 128-bit Random Sequence]	LE 1M	Mode-1	128-bit Random Sequence
CS/RTT/INI/BV-34-C [Channel Sounding – RTT, Initiator, LE 1M, Mode-3, RTT 128-bit Random Sequence]	LE 1M	Mode-3	128-bit Random Sequence
CS/RTT/INI/BV-35-C [Channel Sounding – RTT, Initiator, LE 2M, Mode-1, RTT 128-bit Random Sequence]	LE 2M	Mode-1	128-bit Random Sequence
CS/RTT/INI/BV-36-C [Channel Sounding – RTT, Initiator, LE 2M, Mode-3, RTT 128-bit Random Sequence]	LE 2M	Mode-3	128-bit Random Sequence
CS/RTT/INI/BV-49-C [Channel Sounding – RTT, Initiator, LE 2M 2BT, Mode-1, RTT 128-bit Random Sequence]	LE 2M 2BT	Mode-1	128-bit Random Sequence
CS/RTT/INI/BV-50-C [Channel Sounding – RTT, Initiator, LE 2M 2BT, Mode-3, RTT 128-bit Random Sequence]	LE 2M 2BT	Mode-3	128-bit Random Sequence
CS/RTT/INI/BV-51-C [Channel Sounding – RTT, Initiator, LE 1M,	LE 1M	Mode-3 if supported,	AA-only, Max T_SY_CENTER_DELTA

TCID	PHY	Mode	RTT Type Parameters
RTT AA-Only, Max T_SY_CENTER_DELTA]		otherwise Mode-1	
CS/RTT/INI/BV-52-C [Channel Sounding – RTT, Initiator, LE 1M, RTT Random Sequence, Max T_SY_CENTER_DELTA]	LE 1M	Mode-3 if supported, otherwise Mode-1	Max supported random sequence, Max T_SY_CENTER_DELTA
CS/RTT/INI/BV-53-C [Channel Sounding – RTT, Initiator, LE 1M, RTT Sounding Sequence, Max T_SY_CENTER_DELTA]	LE 1M	Mode-3 if supported, otherwise Mode-1	Max supported sounding sequence, Max T_SY_CENTER_DELTA
CS/RTT/INI/BV-54-C [Channel Sounding – RTT, Initiator, LE 2M, RTT AA-Only, Max T_SY_CENTER_DELTA]	LE 2M	Mode-3 if supported, otherwise Mode-1	AA-only, Max T_SY_CENTER_DELTA
CS/RTT/INI/BV-55-C [Channel Sounding – RTT, Initiator, LE 2M, RTT Random Sequence, Max T_SY_CENTER_DELTA]	LE 2M	Mode-3 if supported, otherwise Mode-1	Max supported random sequence, Max T_SY_CENTER_DELTA
CS/RTT/INI/BV-56-C [Channel Sounding – RTT, Initiator, LE 2M, RTT Sounding sequence, Max T_SY_CENTER_DELTA]	LE 2M	Mode-3 if supported, otherwise Mode-1	Max supported sounding sequence, Max T_SY_CENTER_DELTA
CS/RTT/INI/BV-57-C [Channel Sounding – RTT, Initiator, LE 2M 2BT, RTT AA-Only, Max T_SY_CENTER_DELTA]	LE 2M 2BT	Mode-3 if supported, otherwise Mode-1	AA-only, Max T_SY_CENTER_DELTA
CS/RTT/INI/BV-58-C [Channel Sounding – RTT, Initiator, LE 2M 2BT, RTT Random Sequence, Max T_SY_CENTER_DELTA]	LE 2M 2BT	Mode-3 if supported, otherwise Mode-1	Max supported random sequence, Max T_SY_CENTER_DELTA
CS/RTT/INI/BV-59-C [Channel Sounding – RTT, Initiator, LE 2M 2BT, RTT Sounding Sequence, Max T_SY_CENTER_DELTA]	LE 2M 2BT	Mode-3 if supported, otherwise Mode-1	Max supported sounding sequence, Max T_SY_CENTER_DELTA

Table 4.15: Channel Sounding – RTT, Initiator test cases

- Test Procedure
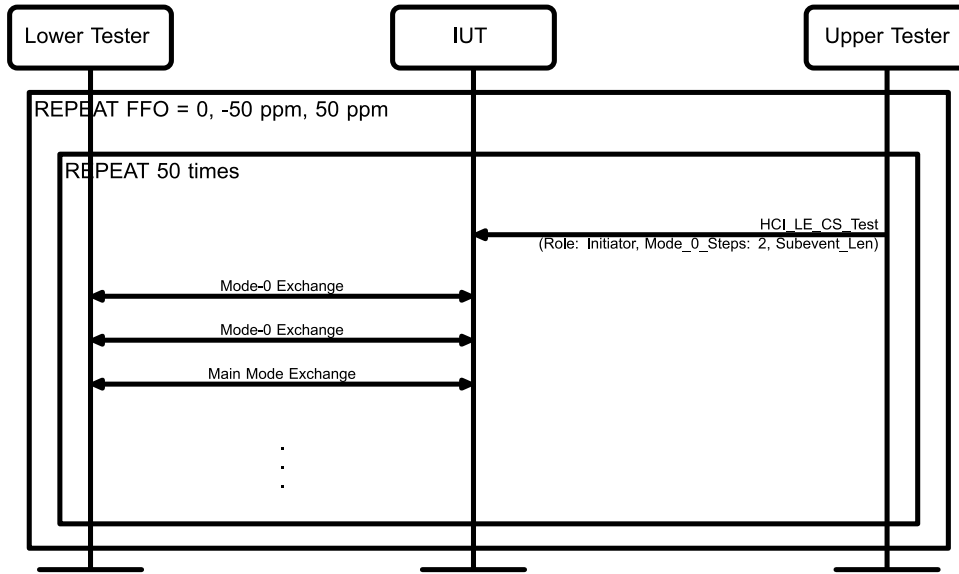
Figure 4.12: Channel Sounding – RTT, Initiator MSC

1. Using the HCI_LE_CS_Test command, the Upper Tester commands the IUT to execute a Channel Sounding subevent with:
   - Role set to Initiator
   - Mode-0 CS Steps set to $M = 2$
   - The value of Subevent Length set to obtain N Main Mode steps, where N is the number of steps required to achieve the supported RTT accuracy for the given RTT type defined in the IXIT. If N is large enough that the number of allowed steps in a subevent is exceeded, then the number of main mode steps is divided between two subevents, so that the first subevent has N/2 main mode steps if N is even, or (N+1)/2 steps if N is odd.
   - If specified in Table 4.15 to set the maximum value of T_SY_CENTER_DELTA, then the maximum supported payload length is chosen for the RTT-type. If applicable, the values of T_IP1, T_FCS, T_PM, T_SW, and N_AP parameters are set to the maximum values supported by the device.
   - All other parameters set to the defaults from Section 4.1.6.3.
2. The IUT and the Lower Tester execute the CS subevent. The Lower Tester measures the physical time of departure, $ToD_A[k]$, and time of arrival, $ToA_A[k]$, of each packet sent by the IUT, where k is the step index. The Lower Tester uses EQ 1 in Vol 6, Part H, §3.1 to determine these values. The Lower Tester corrects for any delays in the test setup, so that these values are referred to the IUT's antenna port.
3. The Lower Tester obtains the value of ToA_ToD_Initiator for the k^{th} step from the IUT via HCI. The Lower Tester corrects for the known timing offsets as described in Vol. 6, Part H, Section 3.1.2 and denotes this as $(ToA - ToD)'_A[k]$.
4. For each step, the Lower Tester calculates the round-trip timing error $\Delta T_{RTT}[k]$ as defined in Vol. 6, Part H, Section 3.1.2. The value of FFO_E used in this calculation is the Lower Tester's FFO value.
5. If a second subevent is required in order to send N main mode steps, then steps 1–4 are repeated. The Subevent Length of the second subevent is adjusted to obtain the correct remaining number of Main Mode steps.
6. The procedure-wise response time error for the procedure $\Delta T_{RTT,PROC}$ is calculated as the average of $\Delta T_{RTT}[k]$ for the subevent, and second subevent if needed. All steps where the Access

Address Quality Indicator is nonzero from either the IUT or the Lower Tester are ignored in this calculation.

7. Steps 1–6 are repeated 49 times. The Lower Tester calculates the values of B and σ as the mean and standard deviation of $\Delta T_{RTT,PROC}$, respectively.

8. Steps 1–7 are repeated for Lower Tester FFO values of -50 ppm and 50 ppm.

- Expected Outcome

  Pass verdict

  The values of $2\sigma + B$ calculated in step 6 are within the declared supported accuracy for the RTT type and corresponding declared N value, for each Lower Tester FFO value.

4.5.2 REF

4.5.2.1 Channel Sounding – RTT, Reflector

- Test Purpose

  Verify that an IUT properly compensates for internal delays and clock drift and implements frequency-based time compensation.

- Reference

  [3] 3.1

- Initial Condition

  - The Lower Tester's transmit power is adjusted such that the input power to the IUT receiver is $-70\ \text{dBm}$.

  - The FFO of the Lower Tester, as applied to the RF frequencies and the symbol and link layer timing, is set to 50 ppm. This value is initialized to 0 ppm for the first pass of the test procedure.

- Test Case Configuration

TCID	PHY	Mode	RTT Type Parameters
CS/RTT/REF/BV-01-C [Channel Sounding – RTT, Reflector, LE 1M, Mode-1, RTT AA-Only]	LE 1M	Mode-1	AA-Only
CS/RTT/REF/BV-02-C [Channel Sounding – RTT, Reflector, LE 1M, Mode-3, RTT AA-Only]	LE 1M	Mode-3	AA-Only
CS/RTT/REF/BV-03-C [Channel Sounding – RTT, Reflector, LE 2M, Mode-1, RTT AA-Only]	LE 2M	Mode-1	AA-Only
CS/RTT/REF/BV-04-C [Channel Sounding – RTT, Reflector, LE 2M, Mode-3, RTT AA-Only]	LE 2M	Mode-3	AA-Only
CS/RTT/REF/BV-37-C [Channel Sounding – RTT, Reflector, LE 2M 2BT, Mode-1, RTT AA-Only]	LE 2M 2BT	Mode-1	AA-Only
CS/RTT/REF/BV-38-C [Channel Sounding – RTT, Reflector, LE 2M 2BT, Mode-3, RTT AA-Only]	LE 2M 2BT	Mode-3	AA-Only

TCID	PHY	Mode	RTT Type Parameters
CS/RTT/REF/BV-13-C [Channel Sounding – RTT, Reflector, LE 1M, Mode-1, RTT 32-bit Sounding Sequence]	LE 1M	Mode-1	32-bit Sounding Sequence
CS/RTT/REF/BV-14-C [Channel Sounding – RTT, Reflector, LE 1M, Mode-3, RTT 32-bit Sounding Sequence]	LE 1M	Mode-3	32-bit Sounding Sequence
CS/RTT/REF/BV-15-C [Channel Sounding – RTT, Reflector, LE 2M, Mode-1, RTT 32-bit Sounding Sequence]	LE 2M	Mode-1	32-bit Sounding Sequence
CS/RTT/REF/BV-16-C [Channel Sounding – RTT, Reflector, LE 2M, Mode-3, RTT 32-bit Sounding Sequence]	LE 2M	Mode-3	32-bit Sounding Sequence
CS/RTT/REF/BV-39-C [Channel Sounding – RTT, Reflector, LE 2M 2BT, Mode-1, RTT 32-bit Sounding Sequence]	LE 2M 2BT	Mode-1	32-bit Sounding Sequence
CS/RTT/REF/BV-40-C [Channel Sounding – RTT, Reflector, LE 2M 2BT, Mode-3, RTT 32-bit Sounding Sequence]	LE 2M 2BT	Mode-3	32-bit Sounding Sequence
CS/RTT/REF/BV-17-C [Channel Sounding – RTT, Reflector, LE 1M, Mode-1, RTT 96-bit Sounding Sequence]	LE 1M	Mode-1	96-bit Sounding Sequence
CS/RTT/REF/BV-18-C [Channel Sounding – RTT, Reflector, LE 1M, Mode-3, RTT 96-bit Sounding Sequence]	LE 1M	Mode-3	96-bit Sounding Sequence
CS/RTT/REF/BV-19-C [Channel Sounding – RTT, Reflector, LE 2M, Mode-1, RTT 96-bit Sounding Sequence]	LE 2M	Mode-1	96-bit Sounding Sequence
CS/RTT/REF/BV-20-C [Channel Sounding – RTT, Reflector, LE 2M, Mode-3, RTT 96-bit Sounding Sequence]	LE 2M	Mode-3	96-bit Sounding Sequence
CS/RTT/REF/BV-41-C [Channel Sounding – RTT, Reflector, LE 2M 2BT, Mode-1, RTT 96-bit Sounding Sequence]	LE 2M 2BT	Mode-1	96-bit Sounding Sequence
CS/RTT/REF/BV-42-C [Channel Sounding – RTT, Reflector, LE 2M 2BT, Mode-3, RTT 96-bit Sounding Sequence]	LE 2M 2BT	Mode-3	96-bit Sounding Sequence

TCID	PHY	Mode	RTT Type Parameters
CS/RTT/REF/BV-21-C [Channel Sounding – RTT, Reflector, LE 1M, Mode-1, RTT 32-bit Random Sequence]	LE 1M	Mode-1	32-bit Random Sequence
CS/RTT/REF/BV-22-C [Channel Sounding – RTT, Reflector, LE 1M, Mode-3, RTT 32-bit Random Sequence]	LE 1M	Mode-3	32-bit Random Sequence
CS/RTT/REF/BV-23-C [Channel Sounding – RTT, Reflector, LE 2M, Mode-1, RTT 32-bit Random Sequence]	LE 2M	Mode-1	32-bit Random Sequence
CS/RTT/REF/BV-24-C [Channel Sounding – RTT, Reflector, LE 2M, Mode-3, RTT 32-bit Random Sequence]	LE 2M	Mode-3	32-bit Random Sequence
CS/RTT/REF/BV-43-C [Channel Sounding – RTT, Reflector, LE 2M 2BT, Mode-1, RTT 32-bit Random Sequence]	LE 2M 2BT	Mode-1	32-bit Random Sequence
CS/RTT/REF/BV-44-C [Channel Sounding – RTT, Reflector, LE 2M 2BT, Mode-3, RTT 32-bit Random Sequence]	LE 2M 2BT	Mode-3	32-bit Random Sequence
CS/RTT/REF/BV-25-C [Channel Sounding – RTT, Reflector, LE 1M, Mode-1, RTT 64-bit Random Sequence]	LE 1M	Mode-1	64-bit Random Sequence
CS/RTT/REF/BV-26-C [Channel Sounding – RTT, Reflector, LE 1M, Mode-3, RTT 64-bit Random Sequence]	LE 1M	Mode-3	64-bit Random Sequence
CS/RTT/REF/BV-27-C [Channel Sounding – RTT, Reflector, LE 2M, Mode-1, RTT 64-bit Random Sequence]	LE 2M	Mode-1	64-bit Random Sequence
CS/RTT/REF/BV-28-C [Channel Sounding – RTT, Reflector, LE 2M, Mode-3, RTT 64-bit Random Sequence]	LE 2M	Mode-3	64-bit Random Sequence
CS/RTT/REF/BV-45-C [Channel Sounding – RTT, Reflector, LE 2M 2BT, Mode-1, RTT 64-bit Random Sequence]	LE 2M 2BT	Mode-1	64-bit Random Sequence
CS/RTT/REF/BV-46-C [Channel Sounding – RTT, Reflector, LE 2M 2BT, Mode-3, RTT 64-bit Random Sequence]	LE 2M 2BT	Mode-3	64-bit Random Sequence

TCID	PHY	Mode	RTT Type Parameters
CS/RTT/REF/BV-29-C [Channel Sounding – RTT, Reflector, LE 1M, Mode-1, RTT 96-bit Random Sequence]	LE 1M	Mode-1	96-bit Random Sequence
CS/RTT/REF/BV-30-C [Channel Sounding – RTT, Reflector, LE 1M, Mode-3, RTT 96-bit Random Sequence]	LE 1M	Mode-3	96-bit Random Sequence
CS/RTT/REF/BV-31-C [Channel Sounding – RTT, Reflector, LE 2M, Mode-1, RTT 96-bit Random Sequence]	LE 2M	Mode-1	96-bit Random Sequence
CS/RTT/REF/BV-32-C [Channel Sounding – RTT, Reflector, LE 2M, Mode-3, RTT 96-bit Random Sequence]	LE 2M	Mode-3	96-bit Random Sequence
CS/RTT/REF/BV-47-C [Channel Sounding – RTT, Reflector, LE 2M 2BT, Mode-1, RTT 96-bit Random Sequence]	LE 2M 2BT	Mode-1	96-bit Random Sequence
CS/RTT/REF/BV-48-C [Channel Sounding – RTT, Reflector, LE 2M 2BT, Mode-3, RTT 96-bit Random Sequence]	LE 2M 2BT	Mode-3	96-bit Random Sequence
CS/RTT/REF/BV-33-C [Channel Sounding – RTT, Reflector, LE 1M, Mode-1, RTT 128-bit Random Sequence]	LE 1M	Mode-1	128-bit Random Sequence
CS/RTT/REF/BV-34-C [Channel Sounding – RTT, Reflector, LE 1M, Mode-3, RTT 128-bit Random Sequence]	LE 1M	Mode-3	128-bit Random Sequence
CS/RTT/REF/BV-35-C [Channel Sounding – RTT, Reflector, LE 2M, Mode-1, RTT 128-bit Random Sequence]	LE 2M	Mode-1	128-bit Random Sequence
CS/RTT/REF/BV-36-C [Channel Sounding – RTT, Reflector, LE 2M, Mode-3, RTT 128-bit Random Sequence]	LE 2M	Mode-3	128-bit Random Sequence
CS/RTT/REF/BV-49-C [Channel Sounding – RTT, Reflector, LE 2M 2BT, Mode-1, RTT 128-bit Random Sequence]	LE 2M 2BT	Mode-1	128-bit Random Sequence
CS/RTT/REF/BV-50-C [Channel Sounding – RTT, Reflector, LE 2M 2BT, Mode-3, RTT 128-bit Random Sequence]	LE 2M 2BT	Mode-3	128-bit Random Sequence

TCID	PHY	Mode	RTT Type Parameters
CS/RTT/REF/BV-51-C [Channel Sounding – RTT, Reflector, LE 1M, Mode-1, RTT AA-Only, Longest Mode-1]	LE 1M	Mode-1	AA-Only T_IP1 = 7 T_FCS_Index = 9 Longest Mode-1 packet
CS/RTT/REF/BV-52-C [Channel Sounding – RTT, Reflector, LE 1M, Mode-1, RTT Random Sequence, Longest Mode-1]	LE 1M	Mode-1	Max supported random sequence T_IP1 = 7 T_FCS_Index = 9 Longest Mode-1 packet
CS/RTT/REF/BV-53-C [Channel Sounding – RTT, Reflector, LE 1M, Mode-1, RTT Sounding Sequence, Max T_SY_CENTER_DELTA]	LE 1M	Mode-1	Max supported sounding sequence T_IP1 = 7 T_FCS_Index = 9 Longest Mode-1 packet
CS/RTT/REF/BV-54-C [Channel Sounding – RTT, Reflector, LE 2M, Mode-1, RTT AA-Only, Longest Mode-1]	LE 2M	Mode-1	AA-Only T_IP1 = 7 T_FCS_Index = 9 Longest Mode-1 packet
CS/RTT/REF/BV-55-C [Channel Sounding – RTT, Reflector, LE 2M, Mode-1, RTT Random Sequence, Longest Mode-1]	LE 2M	Mode-1	Max supported random sequence T_IP1 = 7 T_FCS_Index = 9 Longest Mode-1 packet
CS/RTT/REF/BV-56-C [Channel Sounding – RTT, Reflector, LE 2M, Mode-1, RTT Sounding Sequence, Max T_SY_CENTER_DELTA]	LE 2M	Mode-1	Max supported sounding sequence T_IP1 = 7 T_FCS_Index = 9 Longest Mode-1 packet
CS/RTT/REF/BV-57-C [Channel Sounding – RTT, Reflector, LE 2M 2BT, Mode-1, RTT AA-Only, Longest Mode-1]	LE 2M 2BT	Mode-1	AA-Only T_IP1 = 7 T_FCS_Index = 9 Longest Mode-1 packet
CS/RTT/REF/BV-58-C [Channel Sounding – RTT, Reflector, LE 2M 2BT, Mode-1, RTT Random Sequence, Longest Mode-1]	LE 2M 2BT	Mode-1	Max supported random sequence T_IP1 = 7 T_FCS_Index = 9 Longest Mode-1 packet
CS/RTT/REF/BV-59-C [Channel Sounding – RTT, Reflector, LE 2M 2BT, Mode-1, RTT Sounding Sequence, Max T_SY_CENTER_DELTA]	LE 2M 2BT	Mode-1	Max supported sounding sequence T_IP1 = 7 T_FCS_Index = 9 Longest Mode-1 packet

Table 4.16: Channel Sounding – RTT, Reflector test cases

- Test Procedure
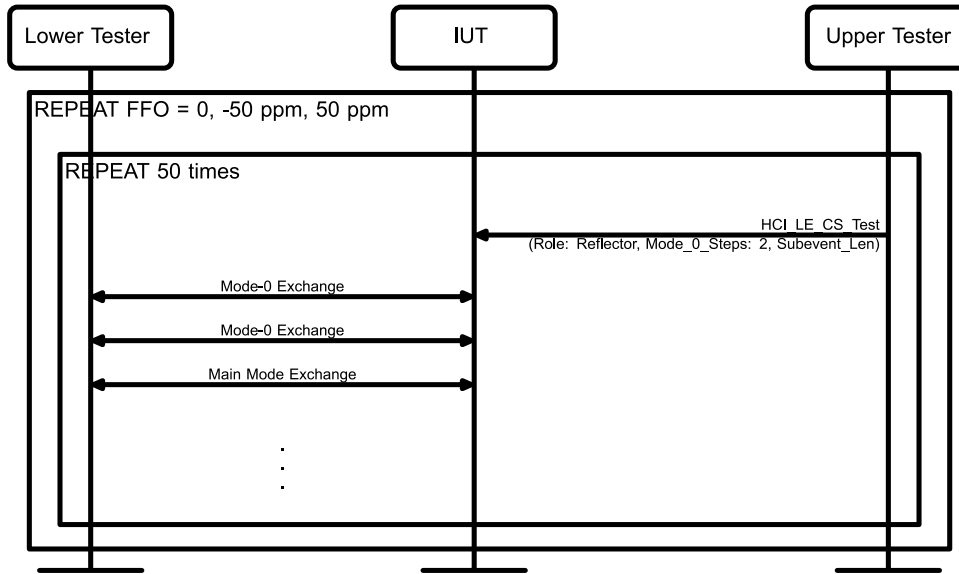
Figure 4.13: Channel Sounding – RTT, Reflector MSC

1. Using the HCI_LE_CS_Test command, the Upper Tester commands the IUT to execute a Channel Sounding subevent with:
   - Role set to Reflector
   - Mode-0 CS Steps set to $M = 2$
   - The value of Subevent Length set to obtain N Main Mode steps, where N is the number of steps required to achieve the supported RTT accuracy for the given RTT Type defined in the IXIT. If N is large enough that the number of allowed steps in a subevent is exceeded, then the number of main mode steps is divided between two subevents, so that the first subevent has N/2 main mode steps if N is even, or (N+1)/2 steps if N is odd.
   - If specified in Table 4.16, then set additional parameters.
   - All other parameters set to the defaults from Section 4.1.6.3.
2. The IUT and the Lower Tester execute the CS subevent. The Lower Tester measures the physical time of departure, $ToD_B[k]$, and time of arrival, $ToA_B[k]$, of each packet sent by the IUT, where *k* is the step index. The Lower Tester uses EQ 1 in Vol. 6, Part H, Section 3.1 to determine these values. The Lower Tester corrects for any delays in the test setup, so that these values are referred to the IUT's antenna port.
3. The Lower Tester measures the value of FFO_E as the average frequency of the Mode-0 tone sent by the IUT. Refer to the Mode-0 frequency verification test.
4. The Lower Tester obtains the value of ToD_ToA_Reflector for the k^{th} step from the IUT via HCI. The Lower Tester corrects for the known timing offsets as described in Vol. 6, Part H, Section 3.1.2 and denotes this as $(ToD - ToA)'_B[k]$.
5. For each step, the Lower Tester calculates the response time error $\Delta T_{RESP}[k]$ as defined in Vol. 6, Part H, Section 3.1.2. The value of FFO_E used in this calculation is that measured in step 3.
6. If a second subevent is required in order to send N main mode steps, then steps 2–5 are repeated. The Subevent Length of the second subevent is adjusted to obtain the correct remaining number of Main Mode steps.
7. The procedure-wise response time error for the procedure $\Delta T_{RESP,PROC}$ is calculated as the average of $\Delta T_{RESP}[k]$ for the subevent, and second subevent if needed. All steps where the Access Address Quality Indicator is nonzero from either the IUT or the Lower Tester are ignored in this calculation.

8. Steps 2–7 are repeated 49 times. The Lower Tester calculates the values of B and σ as the mean and standard deviation of $\Delta T_{RESP,PROC}$, respectively.
9. Steps 2–8 are repeated for Lower Tester FFO values of -50 ppm and 50 ppm.

- Expected Outcome

  Pass verdict

  The values of $2\sigma + B$ in step 8 are within the declared supported accuracy for the RTT type and corresponding declared N value, for each Lower Tester FFO value.

4.6   TIM

Verify the correct Timing of the Channel Sounding packets.

4.6.1   INI

4.6.1.1 CS_SYNC Packets, Timing Verification, Initiator

- Test Purpose

  Verify that the timing of the Mode-0 steps is within range and that the timing of the CS_SYNC packets in the Mode-1 and Mode-3 steps is within a subevent.

- References

  [3] 4.3.1, 4.5

- Initial Condition

  - The IUT is in the Initiator role.

  - The FFO of the tester, as applied to the RF frequencies and the symbol and LL timing clocks, is set to 0 ppm.

- Test Case Configuration

TCID	Reference	PHY	Main Mode Type
CS/TIM/INI/BV-01-C [CS_SYNC packets, Timing Verification, Initiator, 1 Ms/s, Mode-1]	[3] 4.3.2, 4.5	1 Ms/s	Mode-1
CS/TIM/INI/BV-02-C [CS_SYNC packets, Timing Verification, Initiator, 1 Ms/s, Mode-3]	[3] 4.3.4, 4.5	1 Ms/s	Mode-3
CS/TIM/INI/BV-03-C [CS_SYNC packets, Timing Verification, Initiator, 2 Ms/s, Mode-1]	[3] 4.3.2, 4.5	2 Ms/s	Mode-1
CS/TIM/INI/BV-04-C [CS_SYNC packets, Timing Verification, Initiator, 2 Ms/s, Mode-3]	[3] 4.3.4, 4.5	2 Ms/s	Mode-3
CS/TIM/INI/BV-05-C [CS_SYNC packets, Timing Verification, Initiator, 2 Ms/s, BT = 2.0, Mode-1]	[3] 4.3.2, 4.5	2 Ms/s, BT = 2.0	Mode-1
CS/TIM/INI/BV-06-C [CS_SYNC packets, Timing Verification, Initiator, 2 Ms/s, BT = 2.0, Mode-3]	[3] 4.3.4, 4.5	2 Ms/s, BT = 2.0	Mode-3

Table 4.17: CS_SYNC Packets, Timing Verification, Initiator test cases

- Test Procedure

  1. The Upper Tester commands the IUT to enable the Channel Sounding procedure with:
     - The IUT sets as an Initiator
     - Mode_0_Steps set to M, where M is the maximum number of Mode-0 steps the IUT supports
     - The maximum value of N_AP supported by the IUT is used
     - Other parameters specified in Section 4.1.6.3
  2. The IUT sends a Mode-0 transmission to the Lower Tester.
  3. The Lower Tester responds with a Mode-0 transmission to the IUT.
  4. The FFO of the first Mode-0 transmission, $FFO[1]$ is measured according to [8] Section 3.5.1. For each CS subevent used in the measurement, $FFO_E = FFO[1]$.
  5. For each CS step, the Initiator adjusts the timing of its CS_SYNC packet based on FFO_E according to [3] Section 4.5. The expected value of the Initiator transmission for step k is defined by $TOD_I[k] = \hat{t}_1[k]$ as defined in [3] Section 4.5. The expected value of the reflector transmission for step k for Mode-1 and Mode-3 steps is defined by $TOD_R[k] = \hat{t}_1[k] + T\_SY\_CENTER\_DELTA$ as defined in [3] Sections 4.3.2 and 4.3.4, respectively. The expected value of the reflector transmission for step k for Mode-0 steps is defined by $TOD_R[k] = \hat{t}_1[k] + T\_SY + T\_RD + T\_IP1$ as defined in [3] Section 4.3.1, respectively. The expected value of the IUT and the Lower Tester's transmission steps $TOD_{IUT}[k]$, $TOD_{LT}[k]$, respectively, are assigned to either $TOD_R[k]$ or $TOD_I[k]$ depending on which role the IUT and the Lower Tester take.
  6. For each non-Mode-0 CS step k = M+1,…,M, the Lower Tester adds a delay to the CS_SYNC_1 packet of (7k mod 16)/16 symbols. Refer to [3] Section 3.2.1.
  7. Perform either alternative 7A or 7B depending on the PHY and Main Mode specified in Table 4.17.
     Alternative 7A (Mode-1):
     - 7A.1 The IUT sends a Mode-1 transmission (CS_SYNC_1) to the Lower Tester.
     - 7A.2 The Lower Tester replies with a Mode-1 (CS_SYNC_1) to the IUT.
     - 7A.3 The Lower Tester measures the time of departure of the CS_SYNC_1 packet portion sent by the IUT. This value is denoted $\widehat{TOD}_{IUT}[k]$.
     - 7A.4 Repeat steps 7A.1–7A.3 for all Mode-1 transmissions within the CS subevent.
     Alternative 7B (Mode-3):
     - 7B.1 The IUT sends a Mode-3 transmission (CS_SYNC_3 + CS_Tone) to the Lower Tester.
     - 7B.2 The Lower Tester replies with a Mode-3 (CS_SYNC_3 + CS_Tone) to the IUT.
     - 7B.3 The Lower Tester measures the time of departure of the CS_SYNC_3 packet portion sent by the IUT. This value is denoted $\widehat{TOD}_{IUT}[k]$.
     - 7B.4 Repeat steps 7B.1–7B.3 for all Mode-3 transmissions within the CS subevent.
  8. Repeat steps 1–7 nine times.
  9. Repeat steps 1–8 for a Lower Tester FFO of -50 ppm.
  10. Repeat steps 1–8 for a Lower Tester FFO of 50 ppm.

- Expected Outcome

  Pass verdict

  For every CS subevent measured, in the case of:

  - Mode-0 CS steps, $k = 1, …, M$:

The range of the values of $|\widehat{TOD}_{IUT}[k] - TOD_{IUT}[k]|$ is less than or equal to 0.25µs.

- Mode-1 and Mode-3 CS steps, $k = M + 1, ..., M + K$:

$$LE\ 1M\ PHY: \ -1\ \mu s \leq \widehat{TOD}_{IUT}[k] - TOD_{IUT}[k] \leq 2\ \mu s$$

$$LE\ 2M\ and\ LE\ 2M\ 2BT\ PHY: \ -1\ \mu s \leq \widehat{TOD}_{IUT}[k] - TOD_{IUT}[k] \leq 1.5\ \mu s$$

4.6.1.2 Power Ramp Profile, Ramp-down, Initiator

- Test Purpose

  This test verifies that the Initiator IUT properly ramps down the signal after the transmission of the CS_SYNC or Unmodulated Carrier in the Channel Sounding steps.

- Initial Condition

  - The IUT is in the Initiator role.

- Test Case Configuration

TCID	Reference	Main_Mode Type
CS/TIM/INI/BV-07-C [Power Ramp Profile, Ramp-down, Initiator, Step Mode-1]	[3] 4.3.2	Step Mode-1
CS/TIM/INI/BV-08-C [Power Ramp Profile, Ramp-down, Initiator, Step Mode-2]	[3] 4.3.3	Step Mode-2
CS/TIM/INI/BV-09-C [Power Ramp Profile, Ramp-down, Initiator, Step Mode-3]	[3] 4.3.4	Step Mode-3

Table 4.18: Power Ramp Profile, Ramp-down, Initiator test cases

- Test Procedure
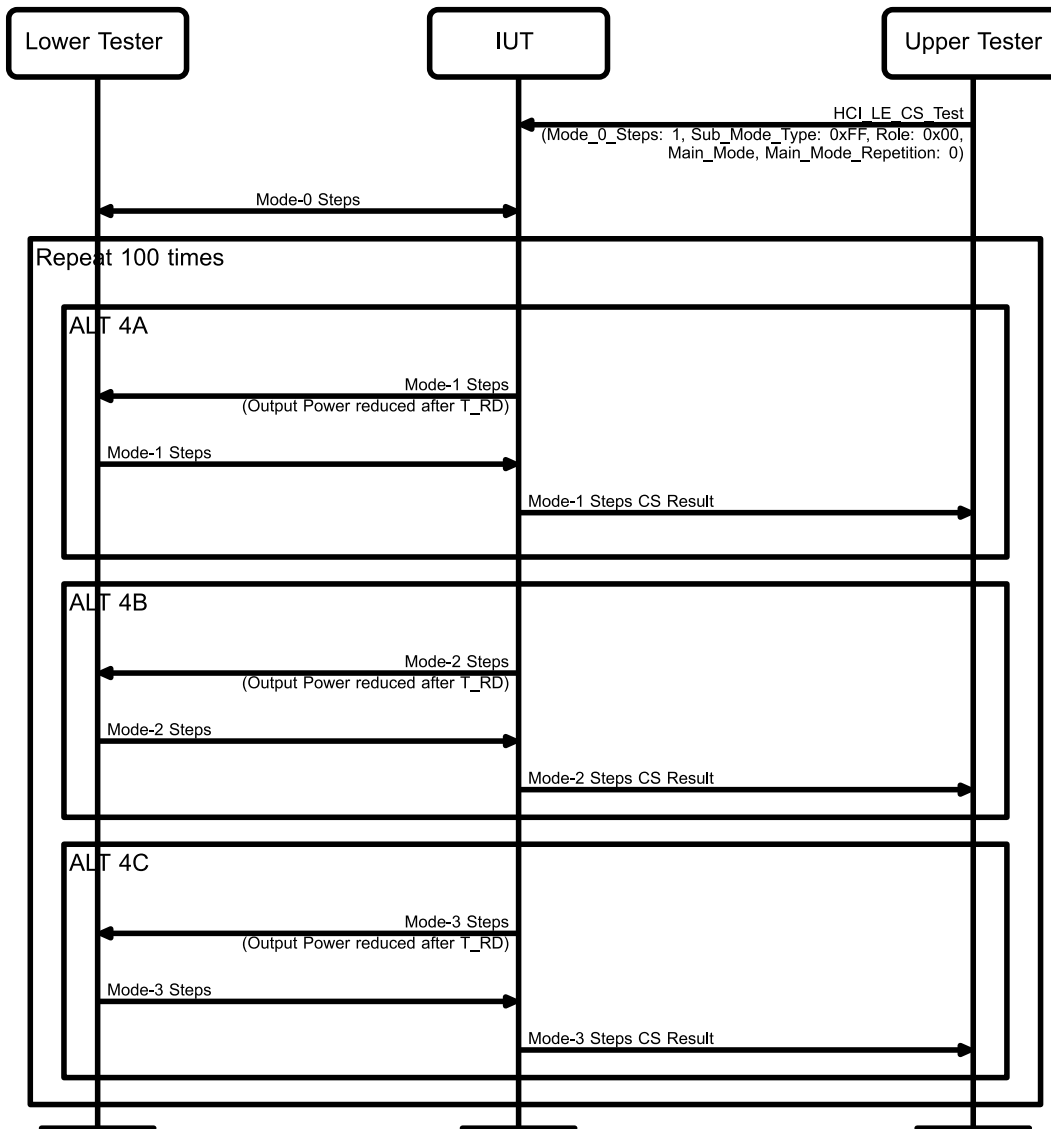
Figure 4.14: Power Ramp Profile, Ramp-down, Initiator MSC

Notes: In CS Step Modes #0, #1, #3, packets can be synchronized to by the Lower Tester for a known end of transmission. In CS Step Mode #2, an unmodulated carrier (UC) cannot be synchronized to by the Lower Tester.

Repeat steps 1–5 where the Lower Tester has a clock drift of -50, 0, and 50 ppm.

1. Using the HCI_LE_CS_Test command, the Upper Tester commands the IUT to enable the Channel Sounding procedure with Mode_0_Steps set to 1, Channel_Map with the lowest valid 50 bits set to produce 100 Main Mode steps, Channel_Map_Repetition set to 2, Sub_Mode_Type set to 0xFF, Main_Mode set as specified in Table 4.18, Role set to 0x00 (Initiator), Main_Mode_Repetition set to 0, and all other parameters set to the defaults from Section 4.1.6.3.
2. The IUT sends a Mode-0 CS_SYNC bit sequence for T_SY time. At T_SY time, the signal ramps down for T_RD. After T_RD, the output power in the RF Channel is at least 40 dB less than the output power during the transmission of CS_SYNC.
3. The Lower Tester waits for T_IP1 and sends the CS_SYNC followed by a CS Tone for T_SY + T_GD + T_FM, and then the signal ramps down for T_RD.

Repeat step 4 one hundred times.

4. Perform alternative 4A, 4B, or 4C depending on the Main_Mode specified in Table 4.18.
   Alternative 4A (Main_Mode-1):
   - 4A.1 The IUT sends a CS_SYNC bit sequence for T_SY time. After T_RD, the output power in the RF Channel is at least 40 dB less than the output power during the transmission of CS_SYNC.
   - 4A.2 The Lower Tester sends a CS_SYNC bit sequence for T_SY time.
   - 4A.3 The IUT reports the Channel Sounding results to the Upper Tester.
   Alternative 4B (Main_Mode-2):
   - 4B.1 The IUT sends a CS Tone for T_PM time. After T_RD, the output power in the RF Channel is at least 40 dB less than the output power during the transmission of CS_ Tone.
   - 4B.2 The Lower Tester sends a CS Tone for T_PM time.
   - 4B.3 The IUT reports the Channel Sounding results to the Upper Tester.
   Alternative 4C (Main_Mode-3):
   - 4C.1 The IUT sends a CS_SYNC bit sequence for T_SY followed by a CS Tone for T_PM. After T_RD, the output power in the RF Channel is at least 40 dB less than the output power during the transmission of the Channel Sounding transmission.
   - 4C.2 The Lower Tester sends a CS Tone for T_PM followed by a CS_SYNC bit sequence for T_SY time.
   - 4C.3 The IUT reports the Main_Mode Channel Sounding results to the Upper Tester.
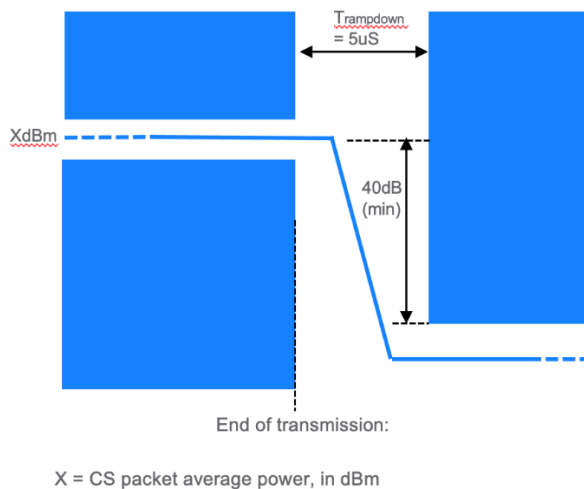
Figure 4.15: Power Ramp Profile, Ramp-down, Initiator

- Expected Outcome

  Pass verdict

  In steps 2, 4A.1, 4B.1, and 4C.1, the signal output power decreases at least 40 dB during the 5 μs ramp down time at least 90 of 100 times.

4.6.2   REF

4.6.2.1 CS_SYNC Packets, Timing Verification, Reflector

- Test Purpose

  Verify that the timing of the Mode-0 steps is within range and that the timing of the CS_SYNC packets in the Mode-1 and Mode-3 steps is within a subevent.

- References

  [3] 4.3.1, 4.5

- Initial Condition

  - The IUT is in the Reflector role.

  - The FFO of the tester, as applied to the RF frequencies and the symbol and LL timing clocks, is set to 0 ppm.

- Test Case Configuration

TCID	Reference	PHY	Main Mode Type
CS/TIM/REF/BV-01-C [CS_SYNC packets, Timing Verification, Reflector, 1 Ms/s, Mode-1]	[3] 4.3.2, 4.5	1 Ms/s	Mode-1
CS/TIM/REF/BV-02-C [CS_SYNC packets, Timing Verification, Reflector, 1 Ms/s, Mode-3]	[3] 4.3.4, 4.5	1 Ms/s	Mode-3
CS/TIM/REF/BV-03-C [CS_SYNC packets, Timing Verification, Reflector, 2 Ms/s, Mode-1]	[3] 4.3.2, 4.5	2 Ms/s	Mode-1
CS/TIM/REF/BV-04-C [CS_SYNC packets, Timing Verification, Reflector, 2 Ms/s, Mode-3]	[3] 4.3.4, 4.5	2 Ms/s	Mode-3
CS/TIM/REF/BV-05-C [CS_SYNC packets, Timing Verification, Reflector, 2 Ms/s, BT = 2.0, Mode-1]	[3] 4.3.2, 4.5	2 Ms/s, BT = 2.0	Mode-1
CS/TIM/REF/BV-06-C [CS_SYNC packets, Timing Verification, Reflector, 2 Ms/s, BT = 2.0, Mode-3]	[3] 4.3.4, 4.5	2 Ms/s, BT = 2.0	Mode-3

Table 4.19: CS_SYNC Packets, Timing Verification, Reflector test cases

- Test Procedure

  1. The Upper Tester commands the IUT to enable the Channel Sounding procedure with:
     - The IUT set as a Reflector
     - Mode-0_Steps set to of M, where M is the maximum number of Mode-0 steps the IUT supports
     - The maximum value of N_AP supported by the IUT is used
     - Lowest frequency for testing as defined in Section 4.1.6.4
     - Other parameters specified in Section 4.1.6.3
  2. The Lower Tester sends a Mode-0 transmission to the IUT.
  3. The IUT responds with a Mode-0 transmission to the Lower Tester.
  4. The FFO of first Mode-0 transmission, $FFO[1]$, is measured according to [8] Section 3.5.1. For each CS subevent used in the measurement, $FFO_E = FFO[1]$.
  5. For each CS step, the Initiator adjusts the timing of its CS_SYNC packet based on FFO_E according to [3] Section 4.5. The expected value of the Initiator transmission for step k is defined

by $TOD_I[k] = \hat{t}_1[k]$ as defined in [3] Section 4.5. The expected value of the reflector transmission for step k for Mode-1 and Mode-3 steps is defined by $TOD_R[k] = \hat{t}_1[k] + T\_SY\_CENTER\_DELTA$ as defined in [3] Sections 4.3.2 and 4.3.4, respectively. The expected value of the reflector transmission for step k for Mode-0 steps is defined by $TOD_R[k] = \hat{t}_1[k] + T\_SY + T\_RD + T\_IP1$ as defined in [3] Seciton 4.3.1, respectively. The expected value of the IUT and the Lower Tester's transmission steps $TOD_{IUT}[k]$, $TOD_{LT}[k]$, respectively, are assigned to either $TOD_R[k]$ or $TOD_I[k]$ depending on which role the IUT and the Lower Tester take.

6. For each non-Mode-0 CS step k = M+1,…,M, the Lower Tester adds a delay to the CS_SYNC_1 packet of (7k mod 16)/16 symbols. Refer to [3] Section 3.2.1.

7. Perform either alternative 7A or 7B depending on the PHY and Main Mode specified in Table 4.19.

   Alternative 7A (Mode-1):

      7A.1   The Lower Tester sends a Mode-1 transmission (CS_SYNC_1) to the IUT.

      7A.2   The IUT replies with a Mode-1 (CS_SYNC_1) to the Lower Tester.

      7A.3   The Lower Tester measures the time of departure of the CS_SYNC_1 packet portion sent by the IUT. This value is denoted $\widehat{TOD}_{IUT}[k]$.

      7A.4   Repeat steps 7A.1–7A.3 for all Mode-1 transmissions within the CS subevent.

   Alternative 7B (Mode-3):

      7B.1   The Lower Tester sends a Mode-3 transmission (CS_SYNC_3 + CS_Tone) to the IUT.

      7B.2   The IUT replies with a Mode-3 (CS_SYNC_3 + CS_Tone) to the Lower Tester.

      7B.3   The Lower Tester measures the time of departure of the CS_SYNC_3 packet portion sent by the IUT. This value is denoted $\widehat{TOD}_{IUT}[k]$.

      7B.4   Repeat steps 7B.1–7B.3 for all Mode-3 transmissions within the CS subevent.

8. Repeat steps 1–7 nine times.

9. Repeat steps 1–8 for a Lower Tester FFO of -50 ppm.

10. Repeat steps 1–8 for a Lower Tester FFO of 50 ppm.

- Expected Outcome:

  Pass verdict

  For every CS subevent measured, in the case of:

  - Mode-1 and Mode-3 CS steps, $k = M + 1, …, M + K$:

$$LE\ 1M\ PHY: -1\ \mu s \leq \left|\widehat{TOD}_{IUT}[k] - TOD_{IUT}[k]\right| \leq 2\ \mu s$$

$$LE\ 2M\ and\ LE\ 2M\ 2BT\ PHY: -1\ \mu s \leq \left|\widehat{TOD}_{IUT}[k] - TOD_{IUT}[k]\right| \leq 1.5\ \mu s$$

4.6.2.2   Power Ramp Profile, Ramp-down, Reflector

- Test Purpose

  Verify that the Reflector IUT properly ramps down the signal after the transmission of the CS_SYNC or Unmodulated Carrier in the Channel Sounding steps.

- Initial Condition

  - The IUT is in the Reflector role.

- Test Case Configuration

TCID	Reference	Main_Mode Type
CS/TIM/REF/BV-08-C [Power Ramp Profile, Ramp-down, Reflector, Step Mode-1]	[3] 4.3.2	Step Mode-1

TCID	Reference	Main_Mode Type
CS/TIM/REF/BV-09-C [Power Ramp Profile, Ramp-down, Reflector, Step Mode-2]	[3] 4.3.3	Step Mode-2
CS/TIM/REF/BV-10-C [Power Ramp Profile, Ramp-down, Reflector, Step Mode-3]	[3] 4.3.4	Step Mode-3

Table 4.20: Power Ramp Profile, Ramp-down, Reflector test cases

- Test Procedure
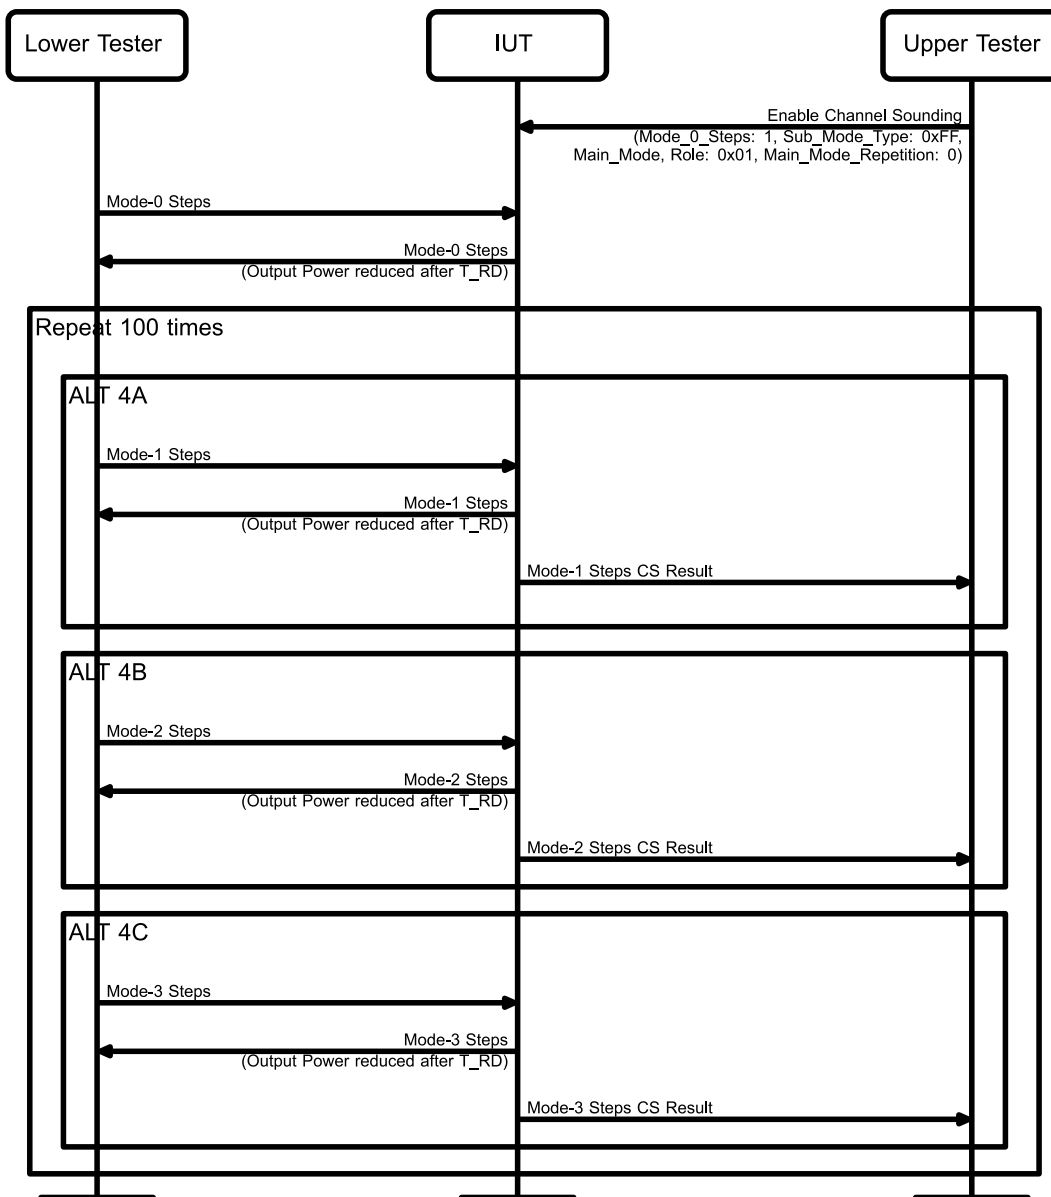
Figure 4.16: Power Ramp Profile, Ramp-down, Reflector MSC

Notes: In CS Step Mode #0, #1, #3, packets can be synchronized to by the Lower Tester for a known end of transmission. In CS Step Mode #2, an unmodulated carrier (UC) cannot be synchronized to by the Lower Tester.

Repeat steps 1–5 where the Lower Tester has a clock drift of -50, 0, and 50 ppm.

1. Using the HCI_LE_CS_Test command, the Upper Tester commands the IUT to enable the Channel Sounding procedure with Mode_0_Steps set to 1, Channel_Map with the lowest valid 50 bits set to produce 100 Main Mode steps, Channel_Map_Repetition set to 2, Sub_Mode_Type set to 0xFF, Main_Mode set as specified in Table 4.20, Role set to 0x01 (Reflector), Main_Mode_Repetition set to 0, and all other parameters set to the defaults from Section 4.1.6.3.
2. The Lower Tester sends a Mode-0 CS_SYNC bit sequence for T_SY time. At T_SY time, the signal ramps down for T_RD.
3. The IUT waits for T_IP1 and sends the CS_SYNC followed by a CS Tone for T_SY + T_GD + T_FM, and then the signal ramps down for T_RD. After T_RD, the output power in the RF Channel is at least 40 dB less than the output power during the transmission of the CS_SYNC.

Repeat step 4 one hundred times.

4. Perform alternative 4A, 4B, or 4C depending on the Main_Mode specified in Table 4.20.
   Alternative 4A (Main_Mode-1):
   - 4A.1 The Lower Tester sends a CS_SYNC bit sequence for T_SY time.
   - 4A.2 The IUT sends a CS_SYNC bit sequence for T_SY time. After T_RD, the output power in the RF Channel is at least 40 dB less than the output power during the transmission of CS_SYNC.
   - 4A.3 The IUT reports the Channel Sounding results to the Upper Tester.
   Alternative 4B (Main_Mode-2):
   - 4B.1 The Lower Tester sends a CS Tone for T_PM time.
   - 4B.2 The IUT sends a CS Tone for T_PM time. After T_RD, the output power in the RF Channel is at least 40 dB less than the output power during the transmission of CS_Tone.
   - 4B.3 The IUT reports the Channel Sounding results to the Upper Tester.
   Alternative 4C (Main_Mode-3):
   - 4C.1 The Lower Tester sends a CS Tone for T_PM followed by a CS_SYNC bit sequence for T_SY time.
   - 4C.2 The IUT sends a CS_SYNC bit sequence for T_SY followed by a CS Tone for T_PM. After T_RD, the output power in the RF Channel is at least 40 dB less than the output power during the transmission of the Channel Sounding transmission.
   - 4C.3 The IUT reports the Main_Mode Channel Sounding results to the Upper Tester.
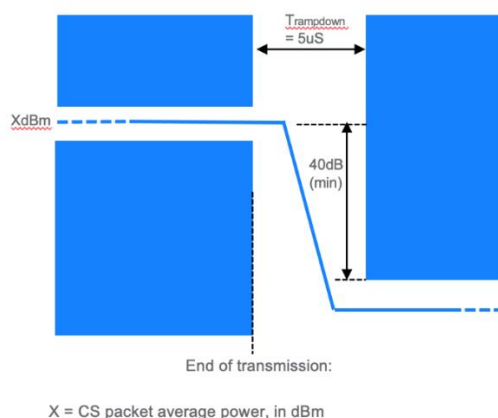
Figure 4.17: Power Ramp Profile, Ramp-down, Reflector

- Expected Outcome

  Pass verdict

  In steps 3, 4A.2, 4B.2, and 4C.2, the signal output power decreases at least 40 dB during the 5 µs ramp down time at least 90 of 100 times.

4.7   PM

Verify the correct Phase Measurements of the Channel Sounding packets.

4.7.1   INI

4.7.1.1 Initiator Transmit Antenna Switching Integrity

- Test Purpose

  Verify that the IUT's transmitter antenna switching occurs in the correct order during the phase measurement period for CS tone exchanges.

- Reference

  [3] 4.7.2

- Initial Condition

  - The IUT is in the Initiator role, and the Lower Tester is in the Reflector role.

  - The IUT's transmitter is set to maximum output power.

  - The IUT antennae are used in the antenna configuration specified in Table 4.21.

  - The IUT is configured to transmit a fixed sequence of 3 Mode-0 CS steps.

  - The transmit frequency for the entire CS subevent is fixed at f_0, (Section 4.1.6.4).

  - The number of antennae (N_AP) in the IUT is defined by the TSPX_number_of_antennae IXIT value.

- Test Case Configuration

Test Case	PHY	Mode	Antenna Configuration
CS/PM/INI/BV-03-C [Initiator Transmit Antenna Switching Integrity, LE 1M, Mode-2, N_AP:1]	LE 1M	Mode-2	N_AP:1
CS/PM/INI/BV-04-C [Initiator Transmit Antenna Switching Integrity, LE 1M, Mode-3, N_AP:1]	LE 1M	Mode-3	N_AP:1
CS/PM/INI/BV-07-C [Initiator Transmit Antenna Switching Integrity, LE 1M, Mode-2, 2:2]	LE 1M	Mode-2	2:2
CS/PM/INI/BV-08-C [Initiator Transmit Antenna Switching Integrity, LE 1M, Mode-3, 2:2]	LE 1M	Mode-3	2:2
CS/PM/INI/BV-17-C [Initiator Transmit Antenna Switching Integrity, LE 2M, Mode-3, N_AP:1]	LE 2M	Mode-3	N_AP:1
CS/PM/INI/BV-18-C [Initiator Transmit Antenna Switching Integrity, LE 2M, Mode-3, 2:2]	LE 2M	Mode-3	2:2

Table 4.21: Initiator Transmit Antenna Switching Integrity test cases

- Test Procedure

  1. Using the HCI_LE_CS_Test command, the Upper Tester commands the IUT to enable the Channel Sounding procedure with:

     - Role set to Initiator
     - T_SW_Time set to the shortest value supported by the IUT (1, 2, 4, or 10 us)
     - Mode-0 CS Steps set to M Mode-0 steps, where $M = 1$
     - Sub_Mode_Type set to 0xFF
     - Main Mode CS steps set to 10
     - The Channels[i] override used to specify a fixed channel, using the lowest frequency for testing as defined in Section 4.1.6.4
     - Other parameters specified in Section 4.1.6.3

  2. The Lower Tester uses the PHY test filter characteristics as defined in [9] Section 6.9.
  3. The IUT sends a Mode-0 transmission to the Lower Tester.
  4. The Lower Tester responds with a Mode-0 transmission.
  5. Main-mode CS steps are exchanged between the Lower Tester and the IUT.
  6. The following settings are used by the Lower Tester:

     - Center frequency f_O: Wanted signal frequency
     - Frequency span: Zero span
     - Resolution BW: 3 MHz
     - Video BW: 3 MHz
     - Detector: Average

  7. Antenna ports other than those used for the configuration of 1:1 are disconnected and terminated.
  8. The Lower Tester performs measurements on the CS_Tone of the IUT's transmissions for every CS step k, and path p during a CS sub-event. The Lower Tester's power measurement window equals the period T_PM, sampled at 1 us intervals. Samples are not included for evaluation during the 1 us exclusion periods.
  9. The Lower Tester records the average output power $P_{AVG,OFF}(k, p)$, for CS step k, and path p.
  10. Connect the X^{th} antenna port, where $X = 1$ ... to the number of supported IUT antennae. All other IUT antennae are disconnected and terminated.
  11. The Lower Tester records the average output power $P_{AVG,ON}(k, p)$, for CS step k, and path p.
  12. Repeat steps 8–11 for all IUT antennae, up to and including the number of supported IUT antennae.

- Test Condition

  Common Test Case Conditions defined in Section 4.1.3 apply.

- Expected Outcome

  The average signal power measured when an IUT antenna port is connected is at least 10 dB greater than the average signal power measured when the IUT antenna port is disconnected in the transmit step corresponding to the antenna.

  Pass verdict

  For each frequency, the following conditions are satisfied:

  $$P_{AVG,ON}(X, k, p) - P_{AVG,OFF}(X, k, p) \geq 10dB$$

  where $X = 1$ ... to the number of supported IUT antennae, up to and including N_AP.

4.7.2   REF

4.7.2.1   Reflector Receive Antenna Switching Integrity

- Test Purpose

  Verify that the IUT's transmitter antenna switching occurs in the correct order during the phase measurement period for CS tone exchanges.

- Reference

  [3] 4.7.3

- Initial Condition

  - The IUT is in the Reflector role, and the Lower Tester is in the Initiator role.

  - The IUT's transmitter is set to maximum output power.

  - The IUT's antennae are used in the antenna configuration specified in Table 4.22.

  - The IUT is configured to transmit a fixed sequence of 1 Mode-0 CS steps.

  - The transmit frequency for the entire CS subevent is fixed at f_0, (Section 4.1.6.4).

  - The number of antennae (N_AP) in the IUT is defined by the TSPX_number_of_antennae IXIT value.

- Test Case Configuration

Test Case	PHY	Mode	Antenna Configuration
CS/PM/REF/BV-06-C [Reflector Receive Antenna Switching Integrity, LE 1M, Mode-2, 1:N_AP]	LE 1M	Mode-2	1:N_AP
CS/PM/REF/BV-08-C [Reflector Receive Antenna Switching Integrity, LE 1M, Mode-2, 2:2]	LE 1M	Mode-2	2:2
CS/PM/REF/BV-09-C [Reflector Receive Antenna Switching Integrity, LE 1M, Mode-3, 2:2]	LE 1M	Mode-3	2:2
CS/PM/REF/BV-07-C [Reflector Receive Antenna Switching Integrity, LE 1M, Mode-3, 1:N_AP]	LE 1M	Mode-3	1:N_AP
CS/PM/REF/BV-18-C [Reflector Receive Antenna Switching Integrity, LE 2M, Mode-3, 1:N_AP]	LE 2M	Mode-3	1:N_AP
CS/PM/REF/BV-19-C [Reflector Receive Antenna Switching Integrity, LE 2M, Mode-3, 2:2]	LE 2M	Mode-3	2:2

Table 4.22: Reflector Receive Antenna Switching Integrity test cases

- Test Procedure

  1. Using the HCI_LE_CS_Test command, the Upper Tester commands the IUT to enable the Channel Sounding procedure with:

     - Role set to Reflector
     - T_SW_Time set to the shortest value supported by the IUT (1, 2, 4, or 10 us)
     - Mode-0 CS Steps set to of M Mode-0 steps, where $M = 1$
     - Sub_Mode_Type set to 0xFF
     - Main Mode CS steps set to 10

  ▪ The Channels[i] override used to specify a fixed channel, using the lowest frequency for testing as defined in Section 4.1.6.4
  ▪ Other parameters specified in Section 4.1.6.3

2. The Lower Tester uses the test filter characteristics as defined in [9] Section 6.9.
3. The Lower Tester sends a Mode-0 transmission to the IUT.
4. The IUT responds with a Mode-0 transmission.
5. Main-mode CS steps are exchanged between the Lower Tester and the IUT.
6. Antenna ports other than those used for the configuration of {1:1} are disconnected and terminated.
7. The IUT performs measurements on the CS_Tone of the Lower Tester's transmissions for every CS step k, and path p during a CS sub-event. The IUT's power measurement window equals the period T_PM, sampled at 1 us intervals. Samples are not included for evaluation during the 1 us exclusion periods.
8. The IUT reports the PCT$[k, p]$ and RPL parameters via the HCI_LE_CS_Subevent_Result event.
9. The Lower Tester calculates the average output power $P_{AVG,OFF}(k, p)$, for step k, and path p using the IQ [dBm] level (see [3] Section 6.2).
10. Repeat steps 1–9 to obtain at least 10 CS steps (k) per path p.
11. Connect the X^{th} antenna port, where $X = 1$ ... to the number of supported IUT antennae, up to and including N_AP. All other IUT antennae are disconnected and terminated.
12. Perform steps 7–10; the Lower Tester calculates the average output power $P_{AVG,ON}(k, p)$ for step k, and path p using the IQ [dBm] level (see [3] Section 6.2).
13. Repeat steps 11–12 for all IUT antennae, up to and including the number of supported IUT antennae.

- Test Condition

Common Test Case Conditions defined in Section 4.1.3 apply.

- Expected Outcome

The average signal power measured when an IUT antenna port is connected is at least 10 dB greater than the average signal power measured when the IUT antenna port is disconnected in the transmit step corresponding to the antenna.

Pass verdict

For each frequency, the following conditions are satisfied:

$$P_{AVG,ON}(X, k, p) - P_{AVG,OFF}(X, k, p) \geq 10dB$$

where $X = 1$ ... to the number of supported IUT antennae, up to and including N_AP.

4.7.3 Both roles

4.7.3.1 Phase Measurements during T_PM

- Test Purpose

Verify that an IUT properly performs phase measurements during a Mode-2 or Mode-3 step.

- Reference

[3] 4.6

- Initial Condition

  - The IUT is in the role specified in Table 4.23.

  - The Lower Tester is configured in the role to use a Main_Mode type specified in Table 4.23.

  - The Lower Tester FAE Table is defined by the TSPX_cs_remote_fae_table IXIT value.

  - The number of antennae is defined by the TSPX_number_of_antennae IXIT value.

  - The maximum CS power level is defined by the TSPX_max_cs_power_level IXIT value.

  - The supported CS Tone Phase Measurement Periods are defined by the TSPX_cs_t_pm IXIT value.

- Test Case Configuration

Test Case	Role	Mode	Submode
CS/PM/INI/BV-01-C [Phase Measurements during T_PM, Initiator, Mode-2]	Initiator (0x00)	Mode-2	N/A
CS/PM/REF/BV-01-C [Phase Measurements during T_PM, Reflector, Mode-2]	Reflector (0x01)	Mode-2	N/A
CS/PM/REF/BV-02-C [Phase Measurements during T_PM, Reflector, Mode-2, SubMode-1]	Reflector (0x01)	Mode-2	Mode-1
CS/PM/INI/BV-02-C [Phase Measurements during T_PM, Initiator, Mode-3]	Initiator (0x00)	Mode-3	N/A
CS/PM/REF/BV-03-C [Phase Measurements during T_PM, Reflector, Mode-3]	Reflector (0x01)	Mode-3	N/A

Table 4.23: Phase Measurements during T_PM test cases

- Test Procedure
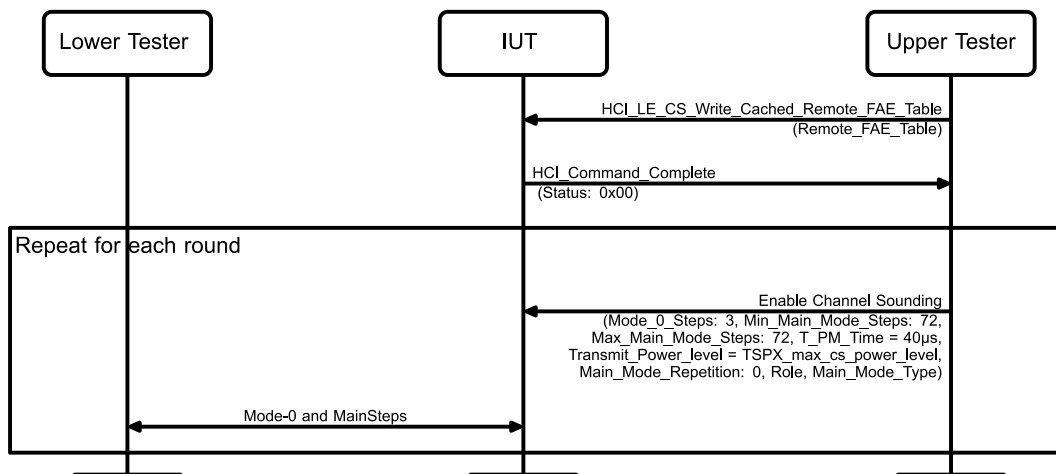
Figure 4.18: Phase Measurements during T_PM MSC

If the IUT role in Table 4.23 is Initiator, execute steps 1 and 2.

Repeat steps 1–4 where the Lower Tester has a clock drift of -50, 0, and 50 ppm.

1. The Upper Tester sends the HCI_LE_CS_Write_Cached_Remote_FAE_Table command to the IUT with Connection_Handle set to 0x0FFF, Remote_FAE_Table set to TSPX_cs_remote_fae_table and receives a successful HCI_Command_Complete event in response.

Repeat steps 2–4 for each T_PM value in TSPX_cs_t_pm.

2. Using the HCI_LE_CS_Test command, the Upper Tester commands the IUT to enable the Channel Sounding procedure with Mode_0_Steps set to 3; T_PM_Time set to 40 µs; Transmit_Power_Level set to TSPX_max_cs_power_level; Main_Mode, Submode, and Role set as specified in Table 4.23; Main_Mode_Repetition set to 0; and all other parameters set to the defaults from Section 4.1.6.3.

Repeat step 3 three times for Mode-0.

3. The Lower Tester and the IUT perform the Mode-0 exchange in Section 4.2.1.
4. For each step, the Lower Tester transmissions of the wanted CS_SYNC packet or CS Tone have a received input power at the IUT of -67dBm. For the duration of the subevent, excluding the Mode-0 steps, the Lower Tester transmits wideband Gaussian noise when transmitting a CS_SYNC packet or CS Tone. Before each step, the Lower Tester randomly selects a power level from Table 4.24 and uses this as the received input power density of the added Gaussian noise for the duration of the step.

Round	CS Tone Quality	Gaussian Noise Floor
1	High (0)	-151 dBm/Hz
2	Low (2)	-133 dBm/Hz

Table 4.24: Phase Measurements during T_PM rounds

- Expected Outcome

Pass verdict

For each Mode-3 step, where the IUT is Initiator and the CS tone extension slot transmission is not expected to be present, the IUT reports the (N_AP+1)th PCT value as 0x000000, and the (N_AP+1)th Tone_Quality_Indicator has bits 0–3 set to 0b0011.

The IUT reports a Tone_Quality_Indicator that matches the CS Tone Quality in Table 4.24 corresponding to the Gaussian noise floor value used by the Lower Tester for the step, for 90% of the T_PM periods where the CS tone transmission is expected to be present as determined by the CS DRBG.

Each Tone_Quality_Indicator reported by the IUT sets bits 4–7 to the value defined by the CS DRBG.

The Reference_Power_Level is between -127 and +20 dBm.

4.7.3.2 Phase-Based Distance Estimate, Sounding Sequence

- Test Purpose

Verify that the IUT properly estimates distance using phase-based calculations on the sounding sequence.

- Reference

[3] 3.3.1

- Initial Condition

- The IUT is in the role specified in Table 4.25.
- The Lower Tester is configured to use a Main_Mode type specified in Table 4.25.
- The number of antennae is defined by the TSPX_number_of_antennae IXIT value.
- The signal level at the IUT input port is -55 dBm.

- Test Case Configuration

Test Case	PHY	Role	Mode
CS/PM/INI/BV-09-C [Phase-Based Distance Estimate, Sounding Sequence, LE 1M, Initiator, Mode-1, 32-bit Sounding Sequence]	LE 1M	Initiator (0x00)	Mode-1, RTT 32-bit Sounding Sequence
CS/PM/REF/BV-10-C [Phase-Based Distance Estimate, Sounding Sequence, LE 1M, Reflector, Mode-1, 32-bit Sounding Sequence]	LE 1M	Reflector (0x01)	Mode-1, RTT 32-bit Sounding Sequence
CS/PM/INI/BV-10-C [Phase-Based Distance Estimate, Sounding Sequence, LE 1M, Initiator, Mode-1, 96-bit Sounding Sequence]	LE 1M	Initiator (0x00)	Mode-1, RTT 96-bit Sounding Sequence
CS/PM/REF/BV-11-C [Phase-Based Distance Estimate, Sounding Sequence, LE 1M, Reflector, Mode-1, 96-bit Sounding Sequence]	LE 1M	Reflector (0x01)	Mode-1, RTT 96-bit Sounding Sequence
CS/PM/INI/BV-11-C [Phase-Based Distance Estimate, Sounding Sequence, LE 1M, Initiator, Mode-3, 32-bit Sounding Sequence]	LE 1M	Initiator (0x00)	Mode-3, RTT 32-bit Sounding Sequence
CS/PM/REF/BV-12-C [Phase-Based Distance Estimate, Sounding Sequence, LE 1M, Reflector, Mode-3, 32-bit Sounding Sequence]	LE 1M	Reflector (0x01)	Mode-3, RTT 32-bit Sounding Sequence
CS/PM/INI/BV-12-C [Phase-Based Distance Estimate, Sounding Sequence, LE 1M, Initiator, Mode-3, 96-bit Sounding Sequence]	LE 1M	Initiator (0x00)	Mode-3, RTT 96-bit Sounding Sequence
CS/PM/REF/BV-13-C [Phase-Based Distance Estimate, Sounding Sequence, LE 1M, Reflector, Mode-3, 96-bit Sounding Sequence]	LE 1M	Reflector (0x01)	Mode-3, RTT 96-bit Sounding Sequence
CS/PM/INI/BV-13-C [Phase-Based Distance Estimate, Sounding Sequence, LE 2M, Initiator, Mode-1, 32-bit Sounding Sequence]	LE 2M	Initiator (0x00)	Mode-1, RTT 32-bit Sounding Sequence
CS/PM/REF/BV-14-C [Phase-Based Distance Estimate, Sounding Sequence, LE 2M, Reflector, Mode-1, 32-bit Sounding Sequence]	LE 2M	Reflector (0x01)	Mode-1, RTT 32-bit Sounding Sequence
CS/PM/INI/BV-14-C [Phase-Based Distance Estimate, Sounding Sequence, LE 2M, Initiator, Mode-1, 96-bit Sounding Sequence]	LE 2M	Initiator (0x00)	Mode-1, RTT 96-bit Sounding Sequence
CS/PM/REF/BV-15-C [Phase-Based Distance Estimate, Sounding Sequence, LE 2M, Reflector, Mode-1, 96-bit Sounding Sequence]	LE 2M	Reflector (0x01)	Mode-1, RTT 96-bit Sounding Sequence

Test Case	PHY	Role	Mode
CS/PM/INI/BV-15-C [Phase-Based Distance Estimate, Sounding Sequence, LE 2M, Initiator, Mode-3, 32-bit Sounding Sequence]	LE 2M	Initiator (0x00)	Mode-3, RTT 32-bit Sounding Sequence
CS/PM/REF/BV-16-C [Phase-Based Distance Estimate, Sounding Sequence, LE 2M, Reflector, Mode-3, 32-bit Sounding Sequence]	LE 2M	Reflector (0x01)	Mode-3, RTT 32-bit Sounding Sequence
CS/PM/INI/BV-16-C [Phase-Based Distance Estimate, Sounding Sequence, LE 2M, Initiator, Mode-3, 96-bit Sounding Sequence]	LE 2M	Initiator (0x00)	Mode-3, RTT 96-bit Sounding Sequence
CS/PM/REF/BV-17-C [Phase-Based Distance Estimate, Sounding Sequence, LE 2M, Reflector, Mode-3, 96-bit Sounding Sequence]	LE 2M	Reflector (0x01)	Mode-3, RTT 96-bit Sounding Sequence

Table 4.25: Phase-Based Distance Estimate, Sounding Sequence test cases

- Test Procedure
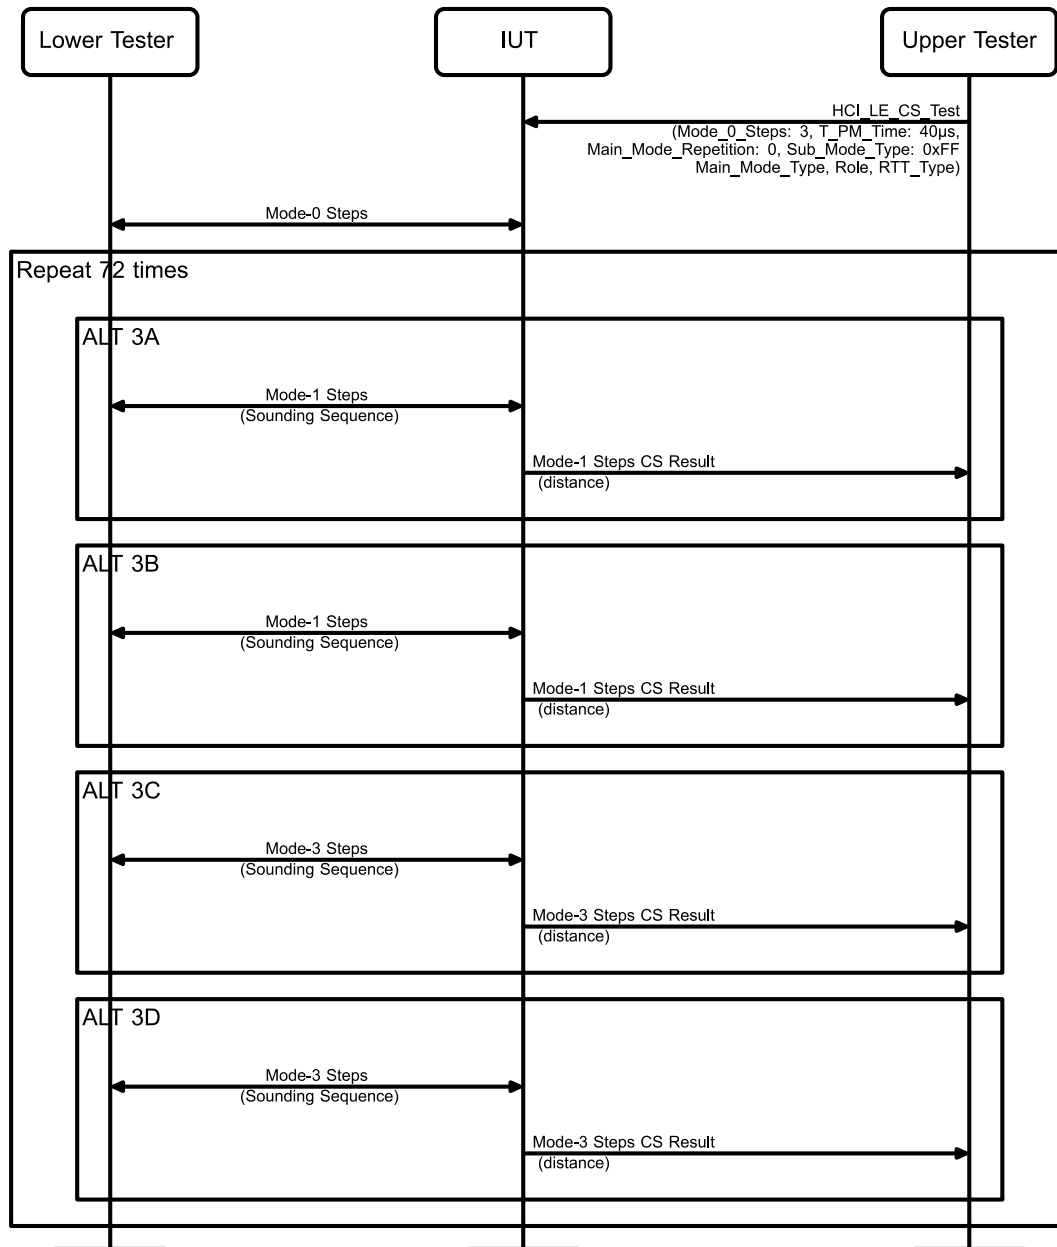
Figure 4.19: Phase-Based Distance Estimate, Sounding Sequence MSC

Repeat steps 1–3 where the Lower Tester has a clock drift of -50, 0, and 50 ppm.

1. Using the HCI_LE_CS_Test command, the Upper Tester commands the IUT to enable the Channel Sounding procedure with Mode_0_Steps set to 3; T_PM_Time set to 40 μs; Main_Mode_Repetition set to 0; Sub_Mode_Type set to 0xFF; and Main_Mode_Type, Role, and RTT_Type set as specified in Table 4.25; and all other parameters set to the defaults from Section 4.1.6.3.

Repeat step 2 three times.

2. The Lower Tester and the IUT perform the Mode-0 exchange in Section 4.2.1.

Repeat step 3 seventy-two times using the Main_Mode specified in Table 4.25.

3. Perform alternative 3A, 3B, 3C, or 3D depending on the IUT role and Mode specified in Table 4.25.

    Alternative 3A (IUT Initiator and Mode-1):

    3A.1   The IUT sends a Main_Mode CS_SYNC bit sequence for T_SY time with a sounding sequence specified in Table 4.25.

    3A.2   The Lower Tester sends a Mode CS_SYNC bit sequence for T_SY time with a sounding sequence specified in Table 4.25.

    3A.3   The IUT reports the Main_Mode Channel Sounding results to the Upper Tester.

    Alternative 3B (IUT Reflector and Mode-1):

    3B.1   The Lower Tester sends a Mode CS_SYNC bit sequence for T_SY time with a sounding sequence specified in Table 4.25.

    3B.2   The IUT sends a Main_Mode CS_SYNC bit sequence for T_SY time with a sounding sequence specified in Table 4.25.

    3B.3   The IUT reports the Main_Mode Channel Sounding results to the Upper Tester.

    Alternative C (IUT Initiator and Mode-3):

    3C.1   The IUT sends a Main_Mode CS_SYNC bit sequence for T_SY with a sounding sequence specified in Table 4.25 followed by a CS Tone bit sounding sequence for T_SW + T_PM.

    3C.2   The Lower Tester sends a CS Tone for T_PM followed by a CS_SYNC bit sequence for T_SYNC time with a sounding sequence specified in Table 4.25.

    3C.3   The IUT reports the Main_Mode Channel Sounding results to the Upper Tester.

    Alternative D (IUT Reflector and Mode-3):

    3D.1   The Lower Tester sends a Mode CS_SYNC bit sequence for T_SY with a sounding sequence specified in Table 4.25 followed by a CS Tone for T_SW + T_PM.

    3D.2   The IUT sends a CS Tone for T_PM followed by a CS_SYNC bit sequence for T_SY with a sounding sequence specified in Table 4.25.

    3D.3   The IUT reports the Main_Mode Channel Sounding results to the Upper Tester.

- Expected Outcome

Pass verdict

The IUT reports the correct PCT such that the accuracy requirements in [3] Section 3.3.1.2 are satisfied.

$$|\alpha| < 2\pi \times 10.2ns$$

4.8   Test setups examples

4.8.1   Test Equipment Setup for Channel Sounding
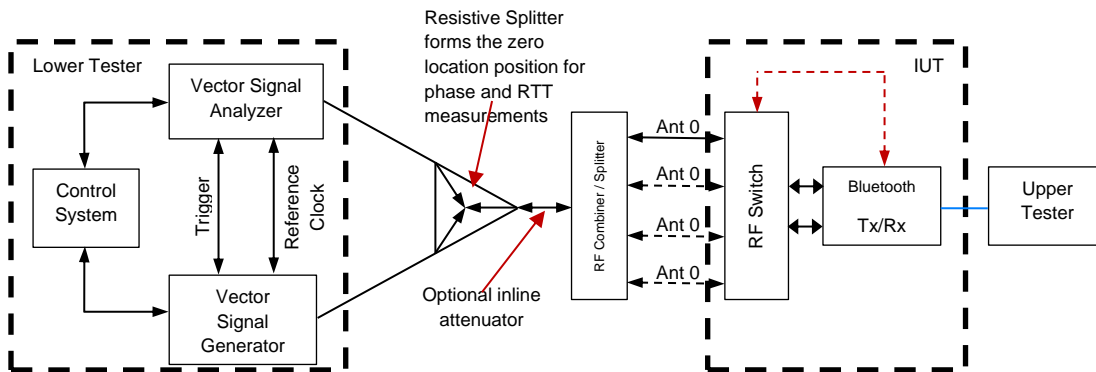
Figure 4.20: Channel Sounding Test Equipment Setup

The IUT is required to provide between 1 and 4 antenna input/output ports, matching the maximum number of antennae supported (TSPX_number_of_antennae) declared in the IXIT [5]. The antenna ports are marked as 0, 1, 2, and 3, as shown in Figure 4.20.

5 Test case mapping

The Test Case Mapping Table (TCMT) maps test cases to specific requirements in the ICS. The IUT is tested in all roles for which support is declared in the ICS document.

The columns for the TCMT are defined as follows:

Item: Contains a logical expression based on specific entries from the associated ICS document. Contains a logical expression (using the operators AND, OR, NOT as needed) based on specific entries from the applicable ICS document(s). The entries are in the form of y/x references, where y corresponds to the table number and x corresponds to the feature number as defined in the ICS document for Channel Sounding [4].

If a test case is mandatory within the respective layer, then the y/x reference is omitted.

Feature: A brief, informal description of the feature being tested.

Test Case(s): The applicable test case identifiers are required for Bluetooth Qualification if the corresponding y/x references defined in the Item column are supported. Further details about the function of the TCMT are elaborated in [2].

For the purpose and structure of the ICS/IXIT refer to [2].

Item	Feature	Test Case(s)
CS 1/2 AND CS 2/4 AND CS 3/4	Channel Sounding, LE 1M, Mode-1, Random Sequence, 32-bit, Reflector	CS/PAC/REF/BV-09-C
CS 1/2 AND CS 2/4 AND CS 2/14 AND CS 3/4	Channel Sounding, LE 1M, Mode-1, Random Sequence, 32-bit, Reflector, Phase-Based NADM	CS/NAD/REF/BV-01-C
CS 1/2 AND CS 2/4 AND CS 3/5	Channel Sounding, LE 1M, Mode-1, Random Sequence, 64-bit, Reflector	CS/PAC/REF/BV-10-C
CS 1/2 AND CS 2/4 AND CS 2/14 AND CS 3/5	Channel Sounding, LE 1M, Mode-1, Random Sequence, 64-bit, Reflector, Phase-Based NADM	CS/NAD/REF/BV-02-C
CS 1/2 AND CS 2/4 AND CS 3/6	Channel Sounding, LE 1M, Mode-1, Random Sequence, 96-bit, Reflector	CS/PAC/REF/BV-11-C
CS 1/2 AND CS 2/4 AND CS 2/14 AND CS 3/6	Channel Sounding, LE 1M, Mode-1, Random Sequence, 96-bit, Reflector, Phase-Based NADM	CS/NAD/REF/BV-03-C
CS 1/2 AND CS 2/4 AND CS 3/7	Channel Sounding, LE 1M, Mode-1, Random Sequence, 128-bit, Reflector	CS/PAC/REF/BV-12-C
CS 1/2 AND CS 2/4 AND CS 2/14 AND CS 3/7	Channel Sounding, LE 1M, Mode-1, Random Sequence, 128-bit, Reflector, Phase-Based NADM	CS/NAD/REF/BV-04-C
CS 1/2 AND CS 2/4 AND CS 3/2	Channel Sounding, LE 1M, Mode-1, Sounding Sequence, 32-bit, Reflector	CS/PAC/REF/BV-01-C CS/PAC/REF/BV-27-C CS/PM/REF/BV-10-C
CS 1/2 AND CS 2/4 AND CS 2/14 AND CS 3/2	Channel Sounding, LE 1M, Mode-1, Sounding Sequence, 32-bit, Reflector, Phase-Based NADM	CS/NAD/REF/BV-05-C
CS 1/2 AND CS 2/4 AND CS 3/3	Channel Sounding, LE 1M, Mode-1, Sounding Sequence, 96-bit, Reflector	CS/PAC/REF/BV-03-C CS/PAC/REF/BV-28-C CS/PM/REF/BV-11-C

Item	Feature	Test Case(s)
CS 1/2 AND CS 2/4 AND CS 2/14 AND CS 3/3	Channel Sounding, LE 1M, Mode-1, Sounding Sequence, 96-bit, Reflector, Phase-Based NADM	CS/NAD/REF/BV-06-C
CS 1/2 AND CS 2/6 AND CS 3/4	Channel Sounding, LE 1M, Mode-3, Random Sequence, 32-bit, Reflector	CS/PAC/REF/BV-17-C
CS 1/2 AND CS 2/6 AND CS 2/14 AND CS 3/4	Channel Sounding, LE 1M, Mode-3, Random Sequence, 32-bit, Reflector, Phase-Based NADM	CS/NAD/REF/BV-07-C
CS 1/2 AND CS 2/6 AND CS 3/5	Channel Sounding, LE 1M, Mode-3, Random Sequence, 64-bit, Reflector	CS/PAC/REF/BV-18-C
CS 1/2 AND CS 2/6 AND CS 2/14 AND CS 3/5	Channel Sounding, LE 1M, Mode-3, Random Sequence, 64-bit, Reflector, Phase-Based NADM	CS/NAD/REF/BV-08-C
CS 1/2 AND CS 2/6 AND CS 3/6	Channel Sounding, LE 1M, Mode-3, Random Sequence, 96-bit, Reflector	CS/PAC/REF/BV-19-C
CS 1/2 AND CS 2/6 AND CS 2/14 AND CS 3/6	Channel Sounding, LE 1M, Mode-3, Random Sequence, 96-bit, Reflector, Phase-Based NADM	CS/NAD/REF/BV-09-C
CS 1/2 AND CS 2/6 AND CS 3/7	Channel Sounding, LE 1M, Mode-3, Random Sequence, 128-bit, Reflector	CS/PAC/REF/BV-20-C
CS 1/2 AND CS 2/6 AND CS 2/14 AND CS 3/7	Channel Sounding, LE 1M, Mode-3, Random Sequence, 128-bit, Reflector, Phase-Based NADM	CS/NAD/REF/BV-10-C
CS 1/2 AND CS 2/6 AND CS 3/2	Channel Sounding, LE 1M, Mode-3, Sounding Sequence, 32-bit, Reflector	CS/PAC/REF/BV-05-C CS/PM/REF/BV-12-C
CS 1/2 AND CS 2/6 AND CS 2/14 AND CS 3/2	Channel Sounding, LE 1M, Mode-3, Sounding Sequence, 32-bit, Reflector, Phase-Based NADM	CS/NAD/REF/BV-11-C
CS 1/2 AND CS 2/6 AND CS 3/3	Channel Sounding, LE 1M, Mode-3, Sounding Sequence, 96-bit, Reflector	CS/PAC/REF/BV-07-C CS/PM/REF/BV-13-C
CS 1/2 AND CS 2/6 AND CS 2/14 AND CS 3/3	Channel Sounding, LE 1M, Mode-3, Sounding Sequence, 96-bit, Reflector, Phase-Based NADM	CS/NAD/REF/BV-12-C
CS 1/1 AND CS 2/4 AND CS 3/4	Channel Sounding, LE 1M, Mode-1, Random Sequence, 32-bit, Initiator	CS/PAC/INI/BV-09-C
CS 1/1 AND CS 2/4 AND CS 2/14 AND CS 3/4	Channel Sounding, LE 1M, Mode-1, Random Sequence, 32-bit, Initiator, Phase-Based NADM	CS/NAD/INI/BV-01-C
CS 1/1 AND CS 2/4 AND CS 3/5	Channel Sounding, LE 1M, Mode-1, Random Sequence, 64-bit, Initiator	CS/PAC/INI/BV-10-C
CS 1/1 AND CS 2/4 AND CS 2/14 AND CS 3/5	Channel Sounding, LE 1M, Mode-1, Random Sequence, 64-bit, Initiator, Phase-Based NADM	CS/NAD/INI/BV-02-C
CS 1/1 AND CS 2/4 AND CS 3/6	Channel Sounding, LE 1M, Mode-1, Random Sequence, 96-bit, Initiator	CS/PAC/INI/BV-11-C
CS 1/1 AND CS 2/4 AND CS 2/14 AND CS 3/6	Channel Sounding, LE 1M, Mode-1, Random Sequence, 96-bit, Initiator, Phase-Based NADM	CS/NAD/INI/BV-03-C

Item	Feature	Test Case(s)
CS 1/1 AND CS 2/4 AND CS 3/7	Channel Sounding, LE 1M, Mode-1, Random Sequence, 128-bit, Initiator	CS/PAC/INI/BV-12-C
CS 1/1 AND CS 2/4 AND CS 2/14 AND CS 3/7	Channel Sounding, LE 1M, Mode-1, Random Sequence, 128-bit, Initiator, Phase-Based NADM	CS/NAD/INI/BV-04-C
CS 1/1 AND CS 2/4 AND CS 3/2	Channel Sounding, LE 1M, Mode-1, Sounding Sequence, 32-bit, Initiator	CS/PAC/INI/BV-01-C CS/PAC/INI/BV-27-C CS/PM/INI/BV-09-C
CS 1/1 AND CS 2/4 AND CS 2/14 AND CS 3/2	Channel Sounding, LE 1M, Mode-1, Sounding Sequence, 32-bit, Initiator, Phase-Based NADM	CS/NAD/INI/BV-05-C
CS 1/1 AND CS 2/4 AND CS 3/3	Channel Sounding, LE 1M, Mode-1, Sounding Sequence, 96-bit, Initiator	CS/PAC/INI/BV-03-C CS/PAC/INI/BV-28-C CS/PM/INI/BV-10-C
CS 1/1 AND CS 2/4 AND CS 2/14 AND CS 3/3	Channel Sounding, LE 1M, Mode-1, Sounding Sequence, 96-bit, Initiator, Phase-Based NADM	CS/NAD/INI/BV-06-C
CS 1/1 AND CS 2/6 AND CS 3/4	Channel Sounding, LE 1M, Mode 3, Random Sequence, 32-bit, Initiator	CS/PAC/INI/BV-17-C
CS 1/1 AND CS 2/6 AND CS 2/14 AND CS 3/4	Channel Sounding, LE 1M, Mode 3, Random Sequence, 32-bit, Initiator, Phase-Based NADM	CS/NAD/INI/BV-07-C
CS 1/1 AND CS 2/6 AND CS 3/5	Channel Sounding, LE 1M, Mode-3, Random Sequence, 64-bit, Initiator	CS/PAC/INI/BV-18-C
CS 1/1 AND CS 2/6 AND CS 2/14 AND CS 3/5	Channel Sounding, LE 1M, Mode-3, Random Sequence, 64-bit, Initiator, Phase-Based NADM	CS/NAD/INI/BV-08-C
CS 1/1 AND CS 2/6 AND CS 3/6	Channel Sounding, LE 1M, Mode-3, Random Sequence, 96-bit, Initiator	CS/PAC/INI/BV-19-C
CS 1/1 AND CS 2/6 AND CS 2/14 AND CS 3/6	Channel Sounding, LE 1M, Mode-3, Random Sequence, 96-bit, Initiator, Phase-Based NADM	CS/NAD/INI/BV-09-C
CS 1/1 AND CS 2/6 AND CS 3/7	Channel Sounding, LE 1M, Mode-3, Random Sequence, 128-bit, Initiator	CS/PAC/INI/BV-20-C
CS 1/1 AND CS 2/6 AND CS 2/14 AND CS 3/7	Channel Sounding, LE 1M, Mode-3, Random Sequence, 128-bit, Initiator, Phase-Based NADM	CS/NAD/INI/BV-10-C
CS 1/1 AND CS 2/6 AND CS 3/2	Channel Sounding, LE 1M, Mode-3, Sounding Sequence, 32-bit, Initiator	CS/PAC/INI/BV-05-C CS/PM/INI/BV-11-C
CS 1/1 AND CS 2/6 AND CS 2/14 AND CS 3/2	Channel Sounding, LE 1M, Mode-3, Sounding Sequence, 32-bit, Initiator, Phase-Based NADM	CS/NAD/INI/BV-11-C
CS 1/1 AND CS 2/6 AND CS 3/3	Channel Sounding, LE 1M, Mode-3, Sounding Sequence, 96-bit, Initiator	CS/PAC/INI/BV-07-C CS/PM/INI/BV-12-C
CS 1/1 AND CS 2/6 AND CS 2/14 AND CS 3/3	Channel Sounding, LE 1M, Mode-3, Sounding Sequence, 96-bit, Initiator, Phase-Based NADM	CS/NAD/INI/BV-12-C

Item	Feature	Test Case(s)
CS 1/2 AND CS 2/2 AND CS 2/4 AND CS 3/4	Channel Sounding, LE 2M, Mode-1, Random Sequence, 32-bit, Reflector	CS/PAC/REF/BV-13-C
CS 1/2 AND CS 2/2 AND CS 2/4 AND CS 2/14 AND CS 3/4	Channel Sounding, LE 2M, Mode-1, Random Sequence, 32-bit, Reflector, Phase-Based NADM	CS/NAD/REF/BV-25-C
CS 1/2 AND CS 2/2 AND CS 2/4 AND CS 3/5	Channel Sounding, LE 2M, Mode-1, Random Sequence, 64-bit, Reflector	CS/PAC/REF/BV-14-C
CS 1/2 AND CS 2/2 AND CS 2/4 AND CS 2/14 AND CS 3/5	Channel Sounding, LE 2M, Mode-1, Random Sequence, 64-bit, Reflector, Phase-Based NADM	CS/NAD/REF/BV-26-C
CS 1/2 AND CS 2/2 AND CS 2/4 AND CS 3/6	Channel Sounding, LE 2M, Mode-1, Random Sequence, 96-bit, Reflector	CS/PAC/REF/BV-15-C
CS 1/2 AND CS 2/2 AND CS 2/4 AND CS 2/14 AND CS 3/6	Channel Sounding, LE 2M, Mode-1, Random Sequence, 96-bit, Reflector, Phase-Based NADM	CS/NAD/REF/BV-27-C
CS 1/2 AND CS 2/2 AND CS 2/4 AND CS 3/7	Channel Sounding, LE 2M, Mode-1, Random Sequence, 128-bit, Reflector	CS/PAC/REF/BV-16-C
CS 1/2 AND CS 2/2 AND CS 2/4 AND CS 2/14 AND CS 3/7	Channel Sounding, LE 2M, Mode-1, Random Sequence, 128-bit, Reflector, Phase-Based NADM	CS/NAD/REF/BV-28-C
CS 1/2 AND CS 2/2 AND CS 2/4 AND CS 3/2	Channel Sounding, LE 2M, Mode-1, Sounding Sequence, 32-bit, Reflector	CS/PAC/REF/BV-02-C CS/PM/REF/BV-14-C
CS 1/2 AND CS 2/2 AND CS 2/4 AND CS 2/14 AND CS 3/2	Channel Sounding, LE 2M, Mode-1, Sounding Sequence, 32-bit, Reflector, Phase-Based NADM	CS/NAD/REF/BV-29-C
CS 1/2 AND CS 2/2 AND CS 2/4 AND CS 3/3	Channel Sounding, LE 2M, Mode-1, Sounding Sequence, 96-bit, Reflector	CS/PAC/REF/BV-04-C CS/PM/REF/BV-15-C
CS 1/2 AND CS 2/2 AND CS 2/4 AND CS 2/14 AND CS 3/3	Channel Sounding, LE 2M, Mode-1, Sounding Sequence, 96-bit, Reflector, Phase-Based NADM	CS/NAD/REF/BV-30-C
CS 1/2 AND CS 2/2 AND CS 2/6 AND CS 3/4	Channel Sounding, LE 2M, Mode-3, Random Sequence, 32-bit, Reflector	CS/PAC/REF/BV-21-C
CS 1/2 AND CS 2/2 AND CS 2/6 AND CS 2/14 AND CS 3/4	Channel Sounding, LE 2M, Mode-3, Random Sequence, 32-bit, Reflector, Phase-Based NADM	CS/NAD/REF/BV-31-C
CS 1/2 AND CS 2/2 AND CS 2/6 AND CS 3/5	Channel Sounding, LE 2M, Mode-3, Random Sequence, 64-bit, Reflector	CS/PAC/REF/BV-22-C
CS 1/2 AND CS 2/2 AND CS 2/6 AND CS 2/14 AND CS 3/5	Channel Sounding, LE 2M, Mode-3, Random Sequence, 64-bit, Reflector, Phase-Based NADM	CS/NAD/REF/BV-32-C
CS 1/2 AND CS 2/2 AND CS 2/6 AND CS 3/6	Channel Sounding, LE 2M, Mode-3, Random Sequence, 96-bit, Reflector	CS/PAC/REF/BV-23-C
CS 1/2 AND CS 2/2 AND CS 2/6 AND CS 2/14 AND CS 3/6	Channel Sounding, LE 2M, Mode-3, Random Sequence, 96-bit, Reflector, Phase-Based NADM	CS/NAD/REF/BV-33-C
CS 1/2 AND CS 2/2 AND CS 2/6 AND CS 3/7	Channel Sounding, LE 2M, Mode-3, Random Sequence, 128-bit, Reflector	CS/PAC/REF/BV-24-C

Item	Feature	Test Case(s)
CS 1/2 AND CS 2/2 AND CS 2/6 AND CS 2/14 AND CS 3/7	Channel Sounding, LE 2M, Mode-3, Random Sequence, 128-bit, Reflector, Phase-Based NADM	CS/NAD/REF/BV-34-C
CS 1/2 AND CS 2/2 AND CS 2/6 AND CS 3/2	Channel Sounding, LE 2M, Mode-3, Sounding Sequence, 32-bit, Reflector	CS/PAC/REF/BV-06-C CS/PM/REF/BV-16-C
CS 1/2 AND CS 2/2 AND CS 2/6 AND CS 2/14 AND CS 3/2	Channel Sounding, LE 2M, Mode-3, Sounding Sequence, 32-bit, Reflector, Phase-Based NADM	CS/NAD/REF/BV-35-C
CS 1/2 AND CS 2/2 AND CS 2/6 AND CS 3/3	Channel Sounding, LE 2M, Mode-3, Sounding Sequence, 96-bit, Reflector	CS/PAC/REF/BV-08-C CS/PM/REF/BV-17-C
CS 1/2 AND CS 2/2 AND CS 2/6 AND CS 2/14 AND CS 3/3	Channel Sounding, LE 2M, Mode-3, Sounding Sequence, 96-bit, Reflector, Phase-Based NADM	CS/NAD/REF/BV-36-C
CS 1/1 AND CS 2/2 AND CS 2/4 AND CS 3/4	Channel Sounding, LE 2M, Mode-1, Random Sequence, 32-bit, Initiator	CS/PAC/INI/BV-13-C
CS 1/1 AND CS 2/2 AND CS 2/4 AND CS 2/14 AND CS 3/4	Channel Sounding, LE 2M, Mode-1, Random Sequence, 32-bit, Initiator, Phase-Based NADM	CS/NAD/INI/BV-25-C
CS 1/1 AND CS 2/2 AND CS 2/4 AND CS 3/5	Channel Sounding, LE 2M, Mode-1, Random Sequence, 64-bit, Initiator	CS/PAC/INI/BV-14-C
CS 1/1 AND CS 2/2 AND CS 2/4 AND CS 2/14 AND CS 3/5	Channel Sounding, LE 2M, Mode-1, Random Sequence, 64-bit, Initiator, Phase-Based NADM	CS/NAD/INI/BV-26-C
CS 1/1 AND CS 2/2 AND CS 2/4 AND CS 3/6	Channel Sounding, LE 2M, Mode-1, Random Sequence, 96-bit, Initiator	CS/PAC/INI/BV-15-C
CS 1/1 AND CS 2/2 AND CS 2/4 AND CS 2/14 AND CS 3/6	Channel Sounding, LE 2M, Mode-1, Random Sequence, 96-bit, Initiator, Phase-Based NADM	CS/NAD/INI/BV-27-C
CS 1/1 AND CS 2/2 AND CS 2/4 AND CS 3/7	Channel Sounding, LE 2M, Mode-1, Random Sequence, 128-bit, Initiator	CS/PAC/INI/BV-16-C
CS 1/1 AND CS 2/2 AND CS 2/4 AND CS 2/14 AND CS 3/7	Channel Sounding, LE 2M, Mode-1, Random Sequence, 128-bit, Initiator, Phase-Based NADM	CS/NAD/INI/BV-28-C
CS 1/1 AND CS 2/2 AND CS 2/4 AND CS 3/2	Channel Sounding, LE 2M, Mode-1, Sounding Sequence, 32-bit, Initiator	CS/PAC/INI/BV-02-C CS/PM/INI/BV-13-C
CS 1/1 AND CS 2/2 AND CS 2/4 AND CS 2/14 AND CS 3/2	Channel Sounding, LE 2M, Mode-1, Sounding Sequence, 32-bit, Initiator, Phase-Based NADM	CS/NAD/INI/BV-29-C
CS 1/1 AND CS 2/2 AND CS 2/4 AND CS 3/3	Channel Sounding, LE 2M, Mode-1, Sounding Sequence, 96-bit, Initiator	CS/PAC/INI/BV-04-C CS/PM/INI/BV-14-C
CS 1/1 AND CS 2/2 AND CS 2/4 AND CS 2/14 AND CS 3/3	Channel Sounding, LE 2M, Mode-1, Sounding Sequence, 96-bit, Initiator, Phase-Based NADM	CS/NAD/INI/BV-30-C
CS 1/1 AND CS 2/2 AND CS 2/6 AND CS 3/4	Channel Sounding, LE 2M, Mode-3, Random Sequence, 32-bit, Initiator	CS/PAC/INI/BV-21-C
CS 1/1 AND CS 2/2 AND CS 2/6 AND CS 2/14 AND CS 3/4	Channel Sounding, LE 2M, Mode-3, Random Sequence, 32-bit, Initiator, Phase-Based NADM	CS/NAD/INI/BV-31-C

Item	Feature	Test Case(s)
CS 1/1 AND CS 2/2 AND CS 2/6 AND CS 3/5	Channel Sounding, LE 2M, Mode-3, Random Sequence, 64-bit, Initiator	CS/PAC/INI/BV-22-C
CS 1/1 AND CS 2/2 AND CS 2/6 AND CS 2/14 AND CS 3/5	Channel Sounding, LE 2M, Mode-3, Random Sequence, 64-bit, Initiator, Phase-Based NADM	CS/NAD/INI/BV-32-C
CS 1/1 AND CS 2/2 AND CS 2/6 AND CS 3/6	Channel Sounding, LE 2M, Mode-3, Random Sequence, 96-bit, Initiator	CS/PAC/INI/BV-23-C
CS 1/1 AND CS 2/2 AND CS 2/6 AND CS 2/14 AND CS 3/6	Channel Sounding, LE 2M, Mode-3, Random Sequence, 96-bit, Initiator, Phase-Based NADM	CS/NAD/INI/BV-33-C
CS 1/1 AND CS 2/2 AND CS 2/6 AND CS 3/7	Channel Sounding, LE 2M, Mode-3, Random Sequence, 128-bit, Initiator	CS/PAC/INI/BV-24-C
CS 1/1 AND CS 2/2 AND CS 2/6 AND CS 2/14 AND CS 3/7	Channel Sounding, LE 2M, Mode-3, Random Sequence, 128-bit, Initiator, Phase-Based NADM	CS/NAD/INI/BV-34-C
CS 1/1 AND CS 2/2 AND CS 2/6 AND CS 3/2	Channel Sounding, LE 2M, Mode-3, Sounding Sequence, 32-bit, Initiator	CS/PAC/INI/BV-06-C CS/PM/INI/BV-15-C
CS 1/1 AND CS 2/2 AND CS 2/6 AND CS 2/14 AND CS 3/2	Channel Sounding, LE 2M, Mode-3, Sounding Sequence, 32-bit, Initiator, Phase-Based NADM	CS/NAD/INI/BV-35-C
CS 1/1 AND CS 2/2 AND CS 2/6 AND CS 3/3	Channel Sounding, LE 2M, Mode-3, Sounding Sequence, 96-bit, Initiator	CS/PAC/INI/BV-08-C CS/PM/INI/BV-16-C
CS 1/1 AND CS 2/2 AND CS 2/6 AND CS 3/3	Channel Sounding, LE 2M, Mode-3, Sounding Sequence, 96-bit, Initiator, Phase-Based NADM	CS/NAD/INI/BV-36-C
CS 1/2 AND CS 2/4 AND CS 2/13 AND CS 2/14 AND CS 3/4	Channel Sounding, LE 2M 2BT, Mode-1, Random Sequence, 32-bit, Reflector, Phase-Based NADM	CS/NAD/REF/BV-13-C
CS 1/2 AND CS 2/4 AND CS 2/13 AND CS 2/14 AND CS 3/5	Channel Sounding, LE 2M 2BT, Mode-1, Random Sequence, 64-bit, Reflector, Phase-Based NADM	CS/NAD/REF/BV-14-C
CS 1/2 AND CS 2/4 AND CS 2/13 AND CS 2/14 AND CS 3/6	Channel Sounding, LE 2M 2BT, Mode-1, Random Sequence, 96-bit, Reflector, Phase-Based NADM	CS/NAD/REF/BV-15-C
CS 1/2 AND CS 2/4 AND CS 2/13 AND CS 2/14 AND CS 3/7	Channel Sounding, LE 2M 2BT, Mode-1, Random Sequence, 128-bit, Reflector, Phase-Based NADM	CS/NAD/REF/BV-16-C
CS 1/2 AND CS 2/4 AND CS 2/13 AND CS 2/14 AND CS 3/2	Channel Sounding, LE 2M 2BT, Mode-1, Sounding Sequence, 32-bit, Reflector, Phase-Based NADM	CS/NAD/REF/BV-17-C
CS 1/2 AND CS 2/4 AND CS 2/13 AND CS 2/14 AND CS 3/3	Channel Sounding, LE 2M 2BT, Mode-1, Sounding Sequence, 96-bit, Reflector, Phase-Based NADM	CS/NAD/REF/BV-18-C
CS 1/2 AND CS 2/6 AND CS 2/13 AND CS 2/14 AND CS 3/4	Channel Sounding, LE 2M 2BT, Mode-3, Random Sequence, 32-bit, Reflector, Phase-Based NADM	CS/NAD/REF/BV-19-C
CS 1/2 AND CS 2/6 AND CS 2/13 AND CS 2/14 AND CS 3/5	Channel Sounding, LE 2M 2BT, Mode-3, Random Sequence, 64-bit, Reflector, Phase-Based NADM	CS/NAD/REF/BV-20-C

Item	Feature	Test Case(s)
CS 1/2 AND CS 2/6 AND CS 2/13 AND CS 2/14 AND CS 3/6	Channel Sounding, LE 2M 2BT, Mode-3, Random Sequence, 96-bit, Reflector, Phase-Based NADM	CS/NAD/REF/BV-21-C
CS 1/2 AND CS 2/6 AND CS 2/13 AND CS 2/14 AND CS 3/7	Channel Sounding, LE 2M 2BT, Mode-3, Random Sequence, 128-bit, Reflector, Phase-Based NADM	CS/NAD/REF/BV-22-C
CS 1/2 AND CS 2/6 AND CS 2/13 AND CS 2/14 AND CS 3/2	Channel Sounding, LE 2M 2BT, Mode-3, Sounding Sequence, 32-bit, Reflector, Phase-Based NADM	CS/NAD/REF/BV-23-C
CS 1/2 AND CS 2/6 AND CS 2/13 AND CS 2/14 AND CS 3/3	Channel Sounding, LE 2M 2BT, Mode-3, Sounding Sequence, 96-bit, Reflector, Phase-Based NADM	CS/NAD/REF/BV-24-C
CS 1/1 AND CS 2/4 AND CS 2/13 AND CS 2/14 AND CS 3/4	Channel Sounding, LE 2M 2BT, Mode-1, Random Sequence, 32-bit, Initiator, Phase-Based NADM	CS/NAD/INI/BV-13-C
CS 1/1 AND CS 2/4 AND CS 2/13 AND CS 2/14 AND CS 3/5	Channel Sounding, LE 2M 2BT, Mode-1, Random Sequence, 64-bit, Initiator, Phase-Based NADM	CS/NAD/INI/BV-14-C
CS 1/1 AND CS 2/4 AND CS 2/13 AND CS 2/14 AND CS 3/6	Channel Sounding, LE 2M 2BT, Mode-1, Random Sequence, 96-bit, Initiator, Phase-Based NADM	CS/NAD/INI/BV-15-C
CS 1/1 AND CS 2/4 AND CS 2/13 AND CS 2/14 AND CS 3/7	Channel Sounding, LE 2M 2BT, Mode-1, Random Sequence, 128-bit, Initiator, Phase-Based NADM	CS/NAD/INI/BV-16-C
CS 1/1 AND CS 2/4 AND CS 2/13 AND CS 2/14 AND CS 3/2	Channel Sounding, LE 2M 2BT, Mode-1, Sounding Sequence, 32-bit, Initiator, Phase-Based NADM	CS/NAD/INI/BV-17-C
CS 1/1 AND CS 2/4 AND CS 2/13 AND CS 2/14 AND CS 3/3	Channel Sounding, LE 2M 2BT, Mode-1, Sounding Sequence, 96-bit, Initiator, Phase-Based NADM	CS/NAD/INI/BV-18-C
CS 1/1 AND CS 2/6 AND CS 2/13 AND CS 2/14 AND CS 3/4	Channel Sounding, LE 2M 2BT, Mode-3, Random Sequence, 32-bit, Initiator, Phase-Based NADM	CS/NAD/INI/BV-19-C
CS 1/1 AND CS 2/6 AND CS 2/13 AND CS 2/14 AND CS 3/5	Channel Sounding, LE 2M 2BT, Mode-3, Random Sequence, 64-bit, Initiator, Phase-Based NADM	CS/NAD/INI/BV-20-C
CS 1/1 AND CS 2/6 AND CS 2/13 AND CS 2/14 AND CS 3/6	Channel Sounding, LE 2M 2BT, Mode-3, Random Sequence, 96-bit, Initiator, Phase-Based NADM	CS/NAD/INI/BV-21-C
CS 1/1 AND CS 2/6 AND CS 2/13 AND CS 2/14 AND CS 3/7	Channel Sounding, LE 2M 2BT, Mode-3, Random Sequence, 128-bit, Initiator, Phase-Based NADM	CS/NAD/INI/BV-22-C
CS 1/1 AND CS 2/6 AND CS 2/13 AND CS 2/14 AND CS 3/2	Channel Sounding, LE 2M 2BT, Mode-3, Sounding Sequence, 32-bit, Initiator, Phase-Based NADM	CS/NAD/INI/BV-23-C
CS 1/1 AND CS 2/6 AND CS 2/13 AND CS 2/14 AND CS 3/3	Channel Sounding, LE 2M 2BT, Mode-3, Sounding Sequence, 96-bit, Initiator, Phase-Based NADM	CS/NAD/INI/BV-24-C

Item	Feature	Test Case(s)
CS 1/1 AND CS 2/4	Channel Sounding, Mode-1, Initiator	CS/TIM/INI/BV-01-C CS/TIM/INI/BV-07-C CS/PAC/INI/BV-32-C
CS 1/1 AND CS 2/2 AND CS 2/4	Channel Sounding, Mode-1, Initiator, LE 2M	CS/TIM/INI/BV-03-C
CS 1/1 AND CS 2/4 AND CS 2/13	Channel Sounding, Mode-1, Initiator, LE 2M 2BT	CS/TIM/INI/BV-05-C
CS 1/2 AND CS 2/4	Channel Sounding, Mode-1, Reflector	CS/PAC/REF/BV-25-C CS/PAC/REF/BV-32-C CS/TIM/REF/BV-01-C CS/TIM/REF/BV-08-C
CS 1/2 AND CS 2/2 AND CS 2/4	Channel Sounding, Mode-1, Reflector, LE 2M	CS/PAC/REF/BV-26-C CS/TIM/REF/BV-03-C
CS 1/2 AND CS 2/4 AND CS 2/13	Channel Sounding, Mode-1, Reflector, LE 2M 2BT	CS/TIM/REF/BV-05-C
CS 1/1 AND CS 2/5	Channel Sounding, Mode-2, Initiator	CS/PAC/INI/BV-29-C CS/TIM/INI/BV-08-C
CS 1/1 AND CS 2/5 AND CS 2/15	Channel Sounding, Mode-2, Initiator, Tone Quality Indication	CS/PM/INI/BV-01-C
CS 1/2 AND CS 2/5	Channel Sounding, Mode-2, Reflector	CS/PAC/REF/BV-29-C CS/TIM/REF/BV-09-C
CS 1/2 AND CS 2/5 AND CS 2/15	Channel Sounding, Mode-2, Reflector, Tone Quality Indication	CS/PM/REF/BV-01-C CS/PM/REF/BV-02-C
CS 1/1 AND CS 2/5 AND CS 2/11	Channel Sounding, Mode-2, Initiator, CSA #3c	CS/PAC/INI/BV-30-C CS/PAC/INI/BV-31-C
CS 1/2 AND CS 2/5 AND CS 2/11	Channel Sounding, Mode-2, Reflector, CSA #3c	CS/PAC/REF/BV-30-C CS/PAC/REF/BV-31-C
CS 1/1 AND CS 2/6	Channel Sounding, Mode-3, Initiator	CS/TIM/INI/BV-02-C
CS 1/1 AND CS 2/2 AND CS 2/6	Channel Sounding, Mode-3, Initiator, LE 2M	CS/TIM/INI/BV-04-C
CS 1/1 AND CS 2/6 AND CS 2/13	Channel Sounding, Mode-3, Initiator, LE 2M 2BT	CS/TIM/INI/BV-06-C
CS 1/1 AND CS 2/6	Channel Sounding, Mode-3, Initiator	CS/TIM/INI/BV-09-C
CS 1/1 AND CS 2/6 AND CS 2/15	Channel Sounding, Mode-3, Initiator, Tone Quality Indication	CS/PM/INI/BV-02-C
CS 1/2 AND CS 2/6	Channel Sounding, Mode-3, Reflector	CS/TIM/REF/BV-02-C CS/TIM/REF/BV-10-C
CS 1/2 AND CS 2/2 AND CS 2/6	Channel Sounding, Mode-3, Reflector, LE 2M	CS/TIM/REF/BV-04-C
CS 1/2 AND CS 2/6 AND CS 2/13	Channel Sounding, Mode-3, Reflector, LE 2M 2BT	CS/TIM/REF/BV-06-C
CS 1/2 AND CS 2/6 AND CS 2/15	Channel Sounding, Mode-3, Reflector, Tone Quality Indication	CS/PM/REF/BV-03-C
CS 1/1 AND CS 2/4 AND CS 3/1	Channel Sounding, Mode-1, RTT, Initiator	CS/RTT/INI/BV-01-C CS/RTT/INI/BV-51-C

Item	Feature	Test Case(s)
CS 1/1 AND CS 2/6 AND CS 3/1	Channel Sounding, Mode-3, RTT, Initiator	CS/RTT/INI/BV-02-C
CS 1/1 AND CS 2/2 AND CS 2/4 AND CS 3/1	Channel Sounding, Mode-1, RTT, Initiator, LE 2M	CS/RTT/INI/BV-03-C CS/RTT/INI/BV-54-C
CS 1/1 AND CS 2/2 AND CS 2/6 AND CS 3/1	Channel Sounding, Mode-3, RTT, Initiator, LE 2M	CS/RTT/INI/BV-04-C
CS 1/1 AND CS 2/4 AND CS 2/13 AND CS 3/1	Channel Sounding, Mode-1, RTT, Initiator, LE 2M BT	CS/RTT/INI/BV-37-C CS/RTT/INI/BV-57-C
CS 1/1 AND CS 2/6 AND CS 2/13 AND CS 3/1	Channel Sounding, Mode-3, RTT, Initiator, LE 2M BT	CS/RTT/INI/BV-38-C
CS 1/2 AND CS 2/4 AND CS 3/1	Channel Sounding, Mode-1, RTT, Reflector	CS/RTT/REF/BV-01-C CS/RTT/REF/BV-51-C
CS 1/2 AND CS 2/6 AND CS 3/1	Channel Sounding, Mode-3, RTT, Reflector	CS/RTT/REF/BV-02-C
CS 1/2 AND CS 2/2 AND CS 2/4 AND CS 3/1	Channel Sounding, Mode-1, RTT, Reflector, LE 2M	CS/RTT/REF/BV-03-C CS/RTT/REF/BV-54-C
CS 1/2 AND CS 2/2 AND CS 2/6 AND CS 3/1	Channel Sounding, Mode-3, RTT, Reflector, LE 2M	CS/RTT/REF/BV-04-C
CS 1/2 AND CS 2/4 AND CS 2/13 AND CS 3/1	Channel Sounding, Mode-1, RTT, Reflector, LE 2M 2BT	CS/RTT/REF/BV-37-C CS/RTT/REF/BV-57-C
CS 1/2 AND CS 2/6 AND CS 2/13 AND CS 3/1	Channel Sounding, Mode-3, RTT, Reflector, LE 2M 2BT	CS/RTT/REF/BV-38-C
CS 1/1 AND CS 2/4 AND CS 3/2	Channel Sounding, Mode-1, RTT, Initiator, RTT 32-bit Sounding Sequence	CS/RTT/INI/BV-13-C
CS 1/1 AND CS 2/6 AND CS 3/2	Channel Sounding, Mode-3, RTT, Initiator, RTT 32-bit Sounding Sequence	CS/RTT/INI/BV-14-C
CS 1/1 AND CS 2/2 AND CS 2/4 AND CS 3/2	Channel Sounding, Mode-1, RTT, Initiator, LE 2M, RTT 32-bit Sounding Sequence	CS/RTT/INI/BV-15-C
CS 1/1 AND CS 2/2 AND CS 2/6 AND CS 3/2	Channel Sounding, Mode-3, RTT, Initiator, LE 2M, RTT 32-bit Sounding Sequence	CS/RTT/INI/BV-16-C
CS 1/1 AND CS 2/4 AND CS 2/13 AND CS 3/2	Channel Sounding, Mode-1, RTT, Initiator, LE 2M 2BT, RTT 32-bit Sounding Sequence	CS/RTT/INI/BV-39-C
CS 1/1 AND CS 2/6 AND CS 2/13 AND CS 3/2	Channel Sounding, Mode-3, RTT, Initiator, LE 2M 2BT, RTT 32-bit Sounding Sequence	CS/RTT/INI/BV-40-C
CS 1/1 AND CS 2/4 AND CS 3/2	Channel Sounding, Mode-1, RTT, Reflector, RTT 32-bit Sounding Sequence	CS/RTT/REF/BV-13-C
CS 1/2 AND CS 2/6 AND CS 3/2	Channel Sounding, Mode-3, RTT, Reflector, RTT 32-bit Sounding Sequence	CS/RTT/REF/BV-14-C
CS 1/2 AND CS 2/2 AND CS 2/4 AND CS 3/2	Channel Sounding, Mode-1, RTT, Reflector, LE 2M, RTT 32-bit Sounding Sequence	CS/RTT/REF/BV-15-C
CS 1/2 AND CS 2/2 AND CS 2/6 AND CS 3/2	Channel Sounding, Mode-3, RTT, Reflector, LE 2M, RTT 32-bit Sounding Sequence	CS/RTT/REF/BV-16-C
CS 1/2 AND CS 2/4 AND CS 2/13 AND CS 3/2	Channel Sounding, Mode-1, RTT, Reflector, LE 2M 2BT, RTT 32-bit Sounding Sequence	CS/RTT/REF/BV-39-C
CS 1/2 AND CS 2/6 AND CS 2/13 AND CS 3/2	Channel Sounding, Mode-3, RTT, Reflector, LE 2M 2BT, RTT 32-bit Sounding Sequence	CS/RTT/REF/BV-40-C

Item	Feature	Test Case(s)
CS 1/1 AND CS 2/4 AND CS 3/3	Channel Sounding, Mode-1, RTT, Initiator, RTT 96-bit Sounding Sequence	CS/RTT/INI/BV-17-C
CS 1/1 AND CS 2/6 AND CS 3/3	Channel Sounding, Mode-3, RTT, Initiator, RTT 96-bit Sounding Sequence	CS/RTT/INI/BV-18-C
CS 1/1 AND CS 2/2 AND CS 2/4 AND CS 3/3	Channel Sounding, Mode-1, RTT, Initiator, LE 2M, RTT 96-bit Sounding Sequence	CS/RTT/INI/BV-19-C
CS 1/1 AND CS 2/2 AND CS 2/6 AND CS 3/3	Channel Sounding, Mode-3, RTT, Initiator, LE 2M, RTT 96-bit Sounding Sequence	CS/RTT/INI/BV-20-C
CS 1/1 AND CS 2/4 AND CS 2/13 AND CS 3/3	Channel Sounding, Mode-1, RTT, Initiator, LE 2M 2BT, RTT 96-bit Sounding Sequence	CS/RTT/INI/BV-41-C
CS 1/1 AND CS 2/6 AND CS 2/13 AND CS 3/3	Channel Sounding, Mode-3, RTT, Initiator, LE 2M 2BT, RTT 96-bit Sounding Sequence	CS/RTT/INI/BV-42-C
CS 1/1 AND CS 2/4 AND CS 3/3	Channel Sounding, Mode-1, RTT, Reflector, RTT 96-bit Sounding Sequence	CS/RTT/REF/BV-17-C
CS 1/2 AND CS 2/6 AND CS 3/3	Channel Sounding, Mode-3, RTT, Reflector, RTT 96-bit Sounding Sequence	CS/RTT/REF/BV-18-C
CS 1/2 AND CS 2/2 AND CS 2/4 AND CS 3/3	Channel Sounding, Mode-1, RTT, Reflector, LE 2M, RTT 96-bit Sounding Sequence	CS/RTT/REF/BV-19-C
CS 1/2 AND CS 2/2 AND CS 2/6 AND CS 3/3	Channel Sounding, Mode-3, RTT, Reflector, LE 2M, RTT 96-bit Sounding Sequence	CS/RTT/REF/BV-20-C
CS 1/2 AND CS 2/4 AND CS 2/13 AND CS 3/3	Channel Sounding, Mode-1, RTT, Reflector, LE 2M 2BT, RTT 96-bit Sounding Sequence	CS/RTT/REF/BV-41-C
CS 1/2 AND CS 2/6 AND CS 2/13 AND CS 3/3	Channel Sounding, Mode-3, RTT, Reflector, LE 2M 2BT, RTT 96-bit Sounding Sequence	CS/RTT/REF/BV-42-C
CS 1/1 AND CS 2/4 AND CS 3/4	Channel Sounding, Mode-1, RTT, Initiator, RTT 32-bit Random Sequence	CS/RTT/INI/BV-21-C
CS 1/1 AND CS 2/6 AND CS 3/4	Channel Sounding, Mode-3, RTT, Initiator, RTT 32-bit Random Sequence	CS/RTT/INI/BV-22-C
CS 1/1 AND CS 2/2 AND CS 2/4 AND CS 3/4	Channel Sounding, Mode-1, RTT, Initiator, LE 2M, RTT 32-bit Random Sequence	CS/RTT/INI/BV-23-C
CS 1/1 AND CS 2/2 AND CS 2/6 AND CS 3/4	Channel Sounding, Mode-3, RTT, Initiator, LE 2M, RTT 32-bit Random Sequence	CS/RTT/INI/BV-24-C
CS 1/1 AND CS 2/4 AND CS 2/13 AND CS 3/4	Channel Sounding, Mode-1, RTT, Initiator, LE 2M 2BT, RTT 32-bit Random Sequence	CS/RTT/INI/BV-43-C
CS 1/1 AND CS 2/6 AND CS 2/13 AND CS 3/4	Channel Sounding, Mode-3, RTT, Initiator, LE 2M 2BT, RTT 32-bit Random Sequence	CS/RTT/INI/BV-44-C
CS 1/1 AND CS 2/4 AND CS 3/4	Channel Sounding, Mode-1, RTT, Reflector, RTT 32-bit Random Sequence	CS/RTT/REF/BV-21-C
CS 1/2 AND CS 2/6 AND CS 3/4	Channel Sounding, Mode-3, RTT, Reflector, RTT 32-bit Random Sequence	CS/RTT/REF/BV-22-C
CS 1/2 AND CS 2/2 AND CS 2/4 AND CS 3/4	Channel Sounding, Mode-1, RTT, Reflector, LE 2M, RTT 32-bit Random Sequence	CS/RTT/REF/BV-23-C
CS 1/2 AND CS 2/2 AND CS 2/6 AND CS 3/4	Channel Sounding, Mode-3, RTT, Reflector, LE 2M, RTT 32-bit Random Sequence	CS/RTT/REF/BV-24-C
CS 1/2 AND CS 2/4 AND CS 2/13 AND CS 3/4	Channel Sounding, Mode-1, RTT, Reflector, LE 2M 2BT, RTT 32-bit Random Sequence	CS/RTT/REF/BV-43-C

Item	Feature	Test Case(s)
CS 1/2 AND CS 2/6 AND CS 2/13 AND CS 3/4	Channel Sounding, Mode-3, RTT, Reflector, LE 2M 2BT, RTT 32-bit Random Sequence	CS/RTT/REF/BV-44-C
CS 1/1 AND CS 2/4 AND CS 3/5	Channel Sounding, Mode-1, RTT, Initiator, RTT 64-bit Random Sequence	CS/RTT/INI/BV-25-C
CS 1/1 AND CS 2/6 AND CS 3/5	Channel Sounding, Mode-3, RTT, Initiator, RTT 64-bit Random Sequence	CS/RTT/INI/BV-26-C
CS 1/1 AND CS 2/2 AND CS 2/4 AND CS 3/5	Channel Sounding, Mode-1, RTT, Initiator, LE 2M, RTT 64-bit Random Sequence	CS/RTT/INI/BV-27-C
CS 1/1 AND CS 2/2 AND CS 2/6 AND CS 3/5	Channel Sounding, Mode-3, RTT, Initiator, LE 2M, RTT 64-bit Random Sequence	CS/RTT/INI/BV-28-C
CS 1/1 AND CS 2/4 AND CS 2/13 AND CS 3/5	Channel Sounding, Mode-1, RTT, Initiator, LE 2M 2BT, RTT 64-bit Random Sequence	CS/RTT/INI/BV-45-C
CS 1/1 AND CS 2/6 AND CS 2/13 AND CS 3/5	Channel Sounding, Mode-3, RTT, Initiator, LE 2M 2BT, RTT 64-bit Random Sequence	CS/RTT/INI/BV-46-C
CS 1/1 AND CS 2/4 AND CS 3/5	Channel Sounding, Mode-1, RTT, Reflector, RTT 64-bit Random Sequence	CS/RTT/REF/BV-25-C
CS 1/2 AND CS 2/6 AND CS 3/5	Channel Sounding, Mode-3, RTT, Reflector, RTT 64-bit Random Sequence	CS/RTT/REF/BV-26-C
CS 1/2 AND CS 2/2 AND CS 2/4 AND CS 3/5	Channel Sounding, Mode-1, RTT, Reflector, LE 2M, RTT 64-bit Random Sequence	CS/RTT/REF/BV-27-C
CS 1/2 AND CS 2/2 AND CS 2/6 AND CS 3/5	Channel Sounding, Mode-3, RTT, Reflector, LE 2M, RTT 64-bit Random Sequence	CS/RTT/REF/BV-28-C
CS 1/2 AND CS 2/4 AND CS 2/13 AND CS 3/5	Channel Sounding, Mode-1, RTT, Reflector, LE 2M 2BT, RTT 64-bit Random Sequence	CS/RTT/REF/BV-45-C
CS 1/2 AND CS 2/6 AND CS 2/13 AND CS 3/5	Channel Sounding, Mode-3, RTT, Reflector, LE 2M 2BT, RTT 64-bit Random Sequence	CS/RTT/REF/BV-46-C
CS 1/1 AND CS 2/4 AND CS 3/6	Channel Sounding, Mode-1, RTT, Initiator, RTT 96-bit Random Sequence	CS/RTT/INI/BV-29-C
CS 1/1 AND CS 2/6 AND CS 3/6	Channel Sounding, Mode-3, RTT, Initiator, RTT 96-bit Random Sequence	CS/RTT/INI/BV-30-C
CS 1/1 AND CS 2/2 AND CS 2/4 AND CS 3/6	Channel Sounding, Mode-1, RTT, Initiator, LE 2M, RTT 96-bit Random Sequence	CS/RTT/INI/BV-31-C
CS 1/1 AND CS 2/4 AND CS 2/13 AND CS 3/6	Channel Sounding, Mode-1, RTT, Initiator, LE 2M 2BT, RTT 96-bit Random Sequence	CS/RTT/INI/BV-47-C
CS 1/1 AND CS 2/6 AND CS 2/13 AND CS 3/6	Channel Sounding, Mode-3, RTT, Initiator, LE 2M 2BT, RTT 96-bit Random Sequence	CS/RTT/INI/BV-48-C
CS 1/1 AND CS 2/2 AND CS 2/6 AND CS 3/6	Channel Sounding, Mode-3, RTT, Initiator, LE 2M, RTT 96-bit Random Sequence	CS/RTT/INI/BV-32-C
CS 1/1 AND CS 2/4 AND CS 3/6	Channel Sounding, Mode-1, RTT, Reflector, RTT 96-bit Random Sequence	CS/RTT/REF/BV-29-C
CS 1/2 AND CS 2/6 AND CS 3/6	Channel Sounding, Mode-3, RTT, Reflector, RTT 96-bit Random Sequence	CS/RTT/REF/BV-30-C
CS 1/2 AND CS 2/2 AND CS 2/4 AND CS 3/6	Channel Sounding, Mode-1, RTT, Reflector, LE 2M, RTT 96-bit Random Sequence	CS/RTT/REF/BV-31-C
CS 1/2 AND CS 2/2 AND CS 2/6 AND CS 3/6	Channel Sounding, Mode-3, RTT, Reflector, LE 2M, RTT 96-bit Random Sequence	CS/RTT/REF/BV-32-C

Item	Feature	Test Case(s)
CS 1/2 AND CS 2/4 AND CS 2/13 AND CS 3/6	Channel Sounding, Mode-1, RTT, Reflector, LE 2M 2BT, RTT 96-bit Random Sequence	CS/RTT/REF/BV-47-C
CS 1/2 AND CS 2/6 AND CS 2/13 AND CS 3/6	Channel Sounding, Mode-3, RTT, Reflector, LE 2M 2BT, RTT 96-bit Random Sequence	CS/RTT/REF/BV-48-C
CS 1/1 AND CS 2/4 AND CS 3/7	Channel Sounding, Mode-1, RTT, Initiator, RTT 128-bit Random Sequence	CS/RTT/INI/BV-33-C
CS 1/1 AND CS 2/6 AND CS 3/7	Channel Sounding, Mode-3, RTT, Initiator, RTT 128-bit Random Sequence	CS/RTT/INI/BV-34-C
CS 1/1 AND CS 2/2 AND CS 2/4 AND CS 3/7	Channel Sounding, Mode-1, RTT, Initiator, LE 2M, RTT 128-bit Random Sequence	CS/RTT/INI/BV-35-C
CS 1/1 AND CS 2/2 AND CS 2/6 AND CS 3/7	Channel Sounding, Mode-3, RTT, Initiator, LE 2M, RTT 128-bit Random Sequence	CS/RTT/INI/BV-36-C
CS 1/1 AND CS 2/4 AND CS 2/13 AND CS 3/7	Channel Sounding, Mode-1, RTT, Initiator, LE 2M 2BT, RTT 128-bit Random Sequence	CS/RTT/INI/BV-49-C
CS 1/1 AND CS 2/6 AND CS 2/13 AND CS 3/7	Channel Sounding, Mode-3, RTT, Initiator, LE 2M 2BT, RTT 128-bit Random Sequence	CS/RTT/INI/BV-50-C
CS 1/1 AND CS 2/4 AND CS 3/7	Channel Sounding, Mode-1, RTT, Reflector, RTT 128-bit Random Sequence	CS/RTT/REF/BV-33-C
CS 1/2 AND CS 2/6 AND CS 3/7	Channel Sounding, Mode-3, RTT, Reflector, RTT 128-bit Random Sequence	CS/RTT/REF/BV-34-C
CS 1/2 AND CS 2/2 AND CS 2/4 AND CS 3/7	Channel Sounding, Mode-1, RTT, Reflector, LE 2M, RTT 128-bit Random Sequence	CS/RTT/REF/BV-35-C
CS 1/2 AND CS 2/2 AND CS 2/6 AND CS 3/7	Channel Sounding, Mode-3, RTT, Reflector, LE 2M, RTT 128-bit Random Sequence	CS/RTT/REF/BV-36-C
CS 1/1 AND CS 2/5 AND CS 2/8	Channel Sounding, Mode-2, Initiator, More than one antenna	CS/PM/INI/BV-03-C CS/PM/INI/BV-07-C
CS 1/2 AND CS 2/5 AND CS 2/8	Channel Sounding, Mode-2, Reflector, More than one antenna	CS/PM/REF/BV-06-C CS/PM/REF/BV-08-C
CS 1/1 AND CS 2/6 AND CS 2/8	Channel Sounding, Mode-3, Initiator, More than one antenna	CS/PM/INI/BV-04-C CS/PM/INI/BV-08-C
CS 1/1 AND CS 2/2 AND CS 2/6 AND CS 2/8	Channel Sounding, Mode-3, Initiator, More than one antenna, LE 2M	CS/PM/INI/BV-17-C CS/PM/INI/BV-18-C
CS 1/2 AND CS 2/6 AND CS 2/8	Channel Sounding, Mode-3, Reflector, More than one antenna	CS/PM/REF/BV-07-C CS/PM/REF/BV-09-C
CS 1/2 AND CS 2/2 AND CS 2/6 AND CS 2/8	Channel Sounding, Mode-3, Reflector, More than one antenna, LE 2M	CS/PM/REF/BV-18-C CS/PM/REF/BV-19-C
CS 1/2 AND CS 2/4 AND CS 2/13 AND CS 3/7	Channel Sounding, Mode-1, RTT, Reflector, LE 2M 2BT, RTT 128-bit Random Sequence	CS/RTT/REF/BV-49-C
CS 1/2 AND CS 2/6 AND CS 2/13 AND CS 3/7	Channel Sounding, Mode-3, RTT, Reflector, LE 2M 2BT, RTT 128-bit Random Sequence	CS/RTT/REF/BV-50-C
CS 1/1 AND CS 2/4 AND (CS 3/4 OR CS 3/5 OR CS 3/6 OR CS 3/7)	Channel Sounding, Mode-1, RTT, Initiator, RTT Random Sequence	CS/RTT/INI/BV-52-C
CS 1/1 AND CS 2/4 AND (CS 3/2 OR CS 3/3)	Channel Sounding, Mode-1, RTT, Initiator, RTT Sounding Sequence	CS/RTT/INI/BV-53-C

Item	Feature	Test Case(s)
CS 1/1 AND CS 2/2 AND CS 2/4 AND (CS 3/4 OR CS 3/5 OR CS 3/6 OR CS 3/7)	Channel Sounding, Mode-1, RTT, Initiator, LE 2M, RTT Random Sequence	CS/RTT/INI/BV-55-C
CS 1/1 AND CS 2/2 AND CS 2/4 AND (CS 3/2 OR CS 3/3)	Channel Sounding, Mode-1, RTT, Initiator, LE 2M, RTT Sounding Sequence	CS/RTT/INI/BV-56-C
CS 1/1 AND CS 2/4 AND CS 2/13 AND (CS 3/4 OR CS 3/5 OR CS 3/6 OR CS 3/7)	Channel Sounding, Mode-1, RTT, Initiator, LE 2M 2BT, RTT Random Sequence	CS/RTT/INI/BV-58-C
CS 1/1 AND CS 2/4 AND CS 2/13 AND (CS 3/2 OR CS 3/3)	Channel Sounding, Mode-1, RTT, Initiator, LE 2M 2BT, RTT Sounding Sequence	CS/RTT/INI/BV-59-C
CS 1/2 AND CS 2/4 AND (CS 3/4 OR CS 3/5 OR CS 3/6 OR CS 3/7)	Channel Sounding, Mode-1, RTT, Reflector, RTT Random Sequence	CS/RTT/REF/BV-52-C
CS 1/2 AND CS 2/4 AND (CS 3/2 OR CS 3/3)	Channel Sounding, Mode-1, RTT, Reflector, RTT Sounding Sequence	CS/RTT/REF/BV-53-C
CS 1/2 AND CS 2/2 AND CS 2/4 AND (CS 3/4 OR CS 3/5 OR CS 3/6 OR CS 3/7)	Channel Sounding, Mode-1, RTT, Reflector, LE 2M, RTT Random Sequence	CS/RTT/REF/BV-55-C
CS 1/2 AND CS 2/2 AND CS 2/4 AND (CS 3/2 OR CS 3/3)	Channel Sounding, Mode-1, RTT, Reflector, LE 2M, RTT Sounding Sequence	CS/RTT/REF/BV-56-C
CS 1/2 AND CS 2/4 AND CS 2/13 AND (CS 3/4 OR CS 3/5 OR CS 3/6 OR CS 3/7)	Channel Sounding, Mode-1, RTT, Reflector, LE 2M 2BT, RTT Random Sequence	CS/RTT/REF/BV-58-C
CS 1/2 AND CS 2/4 AND CS 2/13 AND (CS 3/2 OR CS 3/3)	Channel Sounding, Mode-1, RTT, Reflector, LE 2M 2BT, RTT Sounding Sequence	CS/RTT/REF/BV-59-C

Table 5.1: Test case mapping

6 Revision history and acknowledgments

Revision History

Publication Number	Revision Number	Date	Comments
0	p0	2024-09-04	Approved by BTI on 2024-08-14. Prepared for TCRL 2024-2 publication.
	p0ed2r00–r02_BTI voting	2024-10-29 – 2024-10-31	TSE 26338 (rating 1): Updated the table for Default Channel Sounding parameters when using LL PDUs on an ACL connection. TSE 26392 (rating 1): Corrected MSCs for the following sections: "Channel Sounding – RTT, Initiator" and "Channel Sounding – RTT, Reflector". TSE 26394 (rating 1): Updated the section references in step 1 for the sections containing TCs CS/PAC/INI/BV-28-C and CS/PAC/REF/BV-28-C, CS/TIM/REF/BV-08-C – -10-C, and CS/PM/INI/BV-09-C – -16-C and CS/PM/REF/BV-10-C – -17-C. TSE 26395 (rating 1): Updated the MSC for the section containing CS/PAC/INI/BV-32-C and CS/PAC/REF/BV-32-C. TSE 26423 (rating 1): Per E26162, changed "antennas" to "antennae" globally within regular running text. TSE 26475 (rating 1): Corrected one of the Pass verdicts for the section containing CS/PAC/REF/BV-01-C – -08-C and CS/PAC/INI/BV-01-C – -08-C.
	p0 edition 2	2024-11-12	Approved by BTI on 2024-11-12. Prepared for edition 2 publication.

Acknowledgments

Name	Company
Matt Canavan	Bluetooth SIG, Inc.
Gene Chang	Bluetooth SIG, Inc.