CE 208
Quantity Surveying




Estimation of a Residential Building


Mr. Ahmed Farhan Ahnaf Siddique
Ms. Sumaiya Afrose Suma
Mr. Murshed Alam

DEPARTMENT OF CIVIL ENGINEERING
BANGLADESH UNIVERSITY OF ENGINEERING AND TECHNOLOGY

19. Inside Plastering

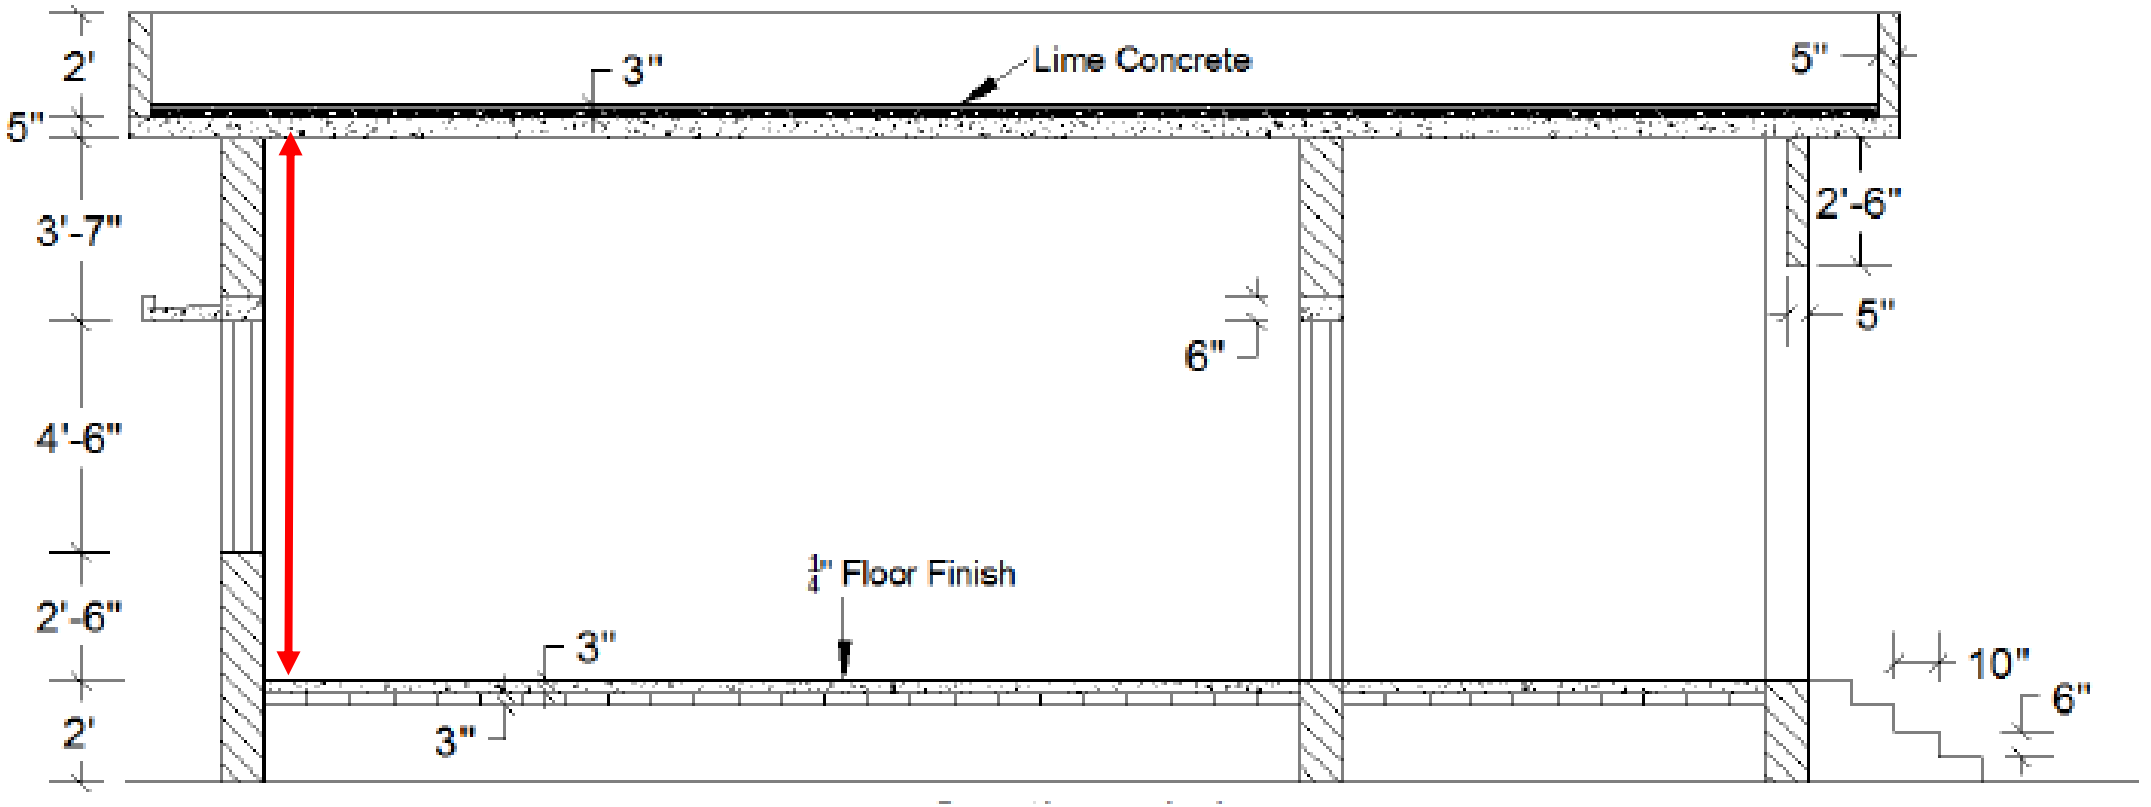


19. Inside Plastering

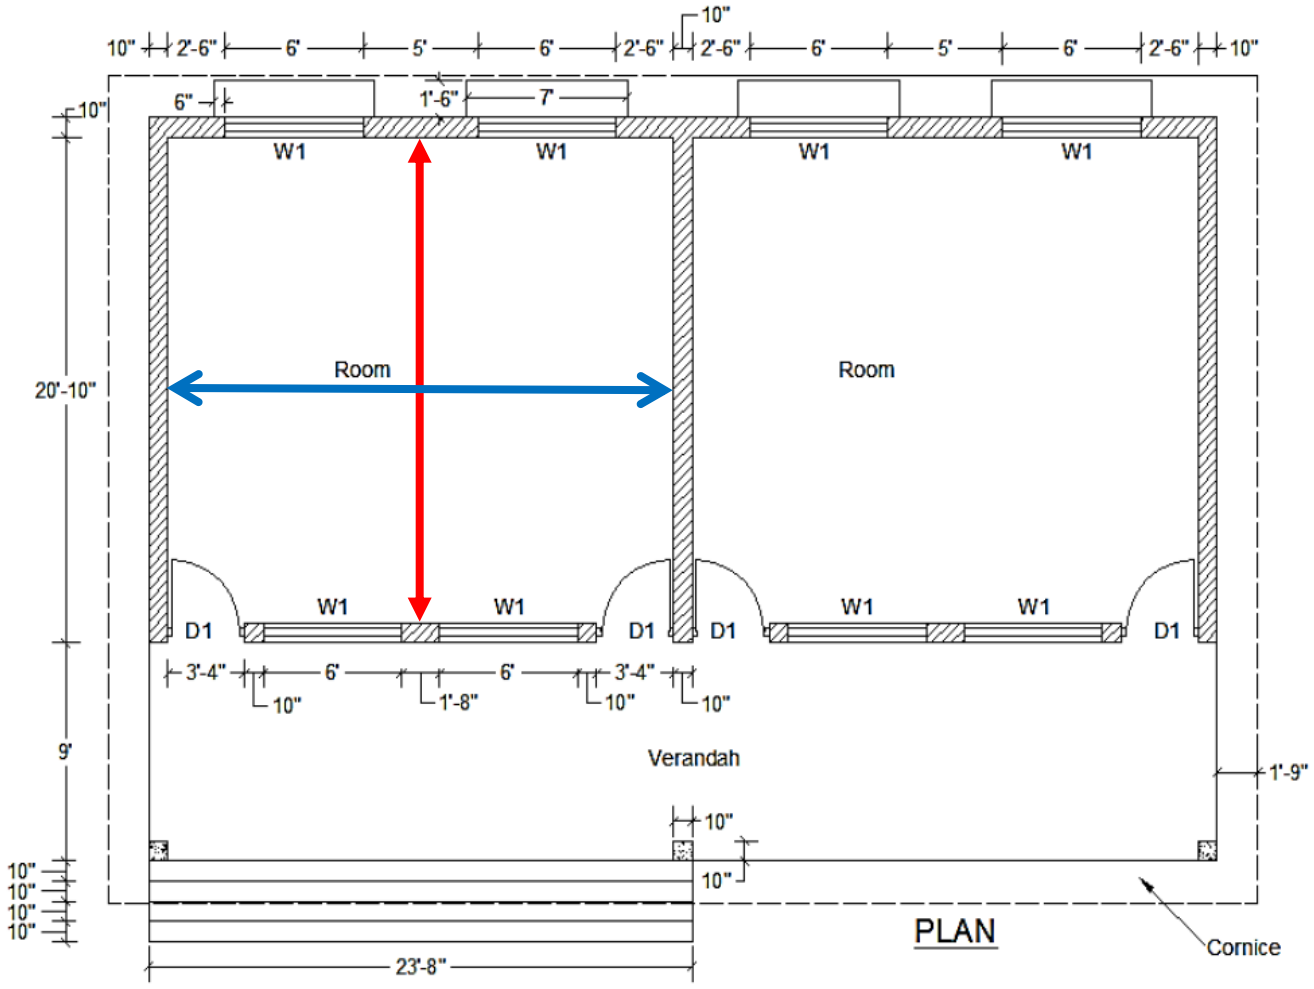

Main Room:

- Length= 2*(22’+ 20’)
- Height= 10’7”-10”(skirting)
- Thickness= 0.25”


19. Inside Plastering

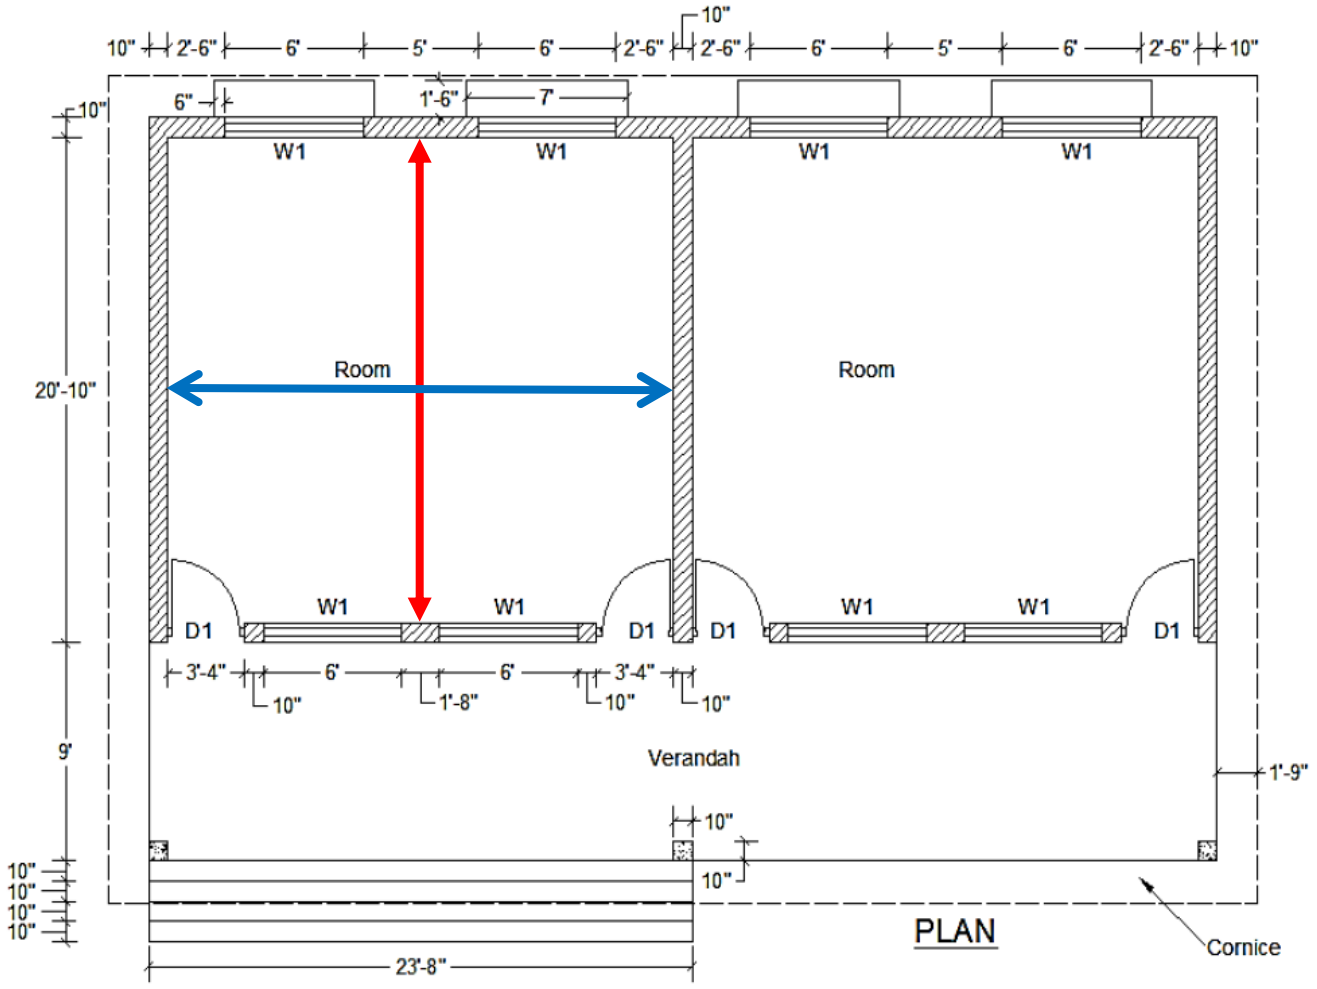

Deduct:

- Window = 4*6’*4’6”*0.25”
- Door = 2*3’4”* (7’-10”skirting) *0.25”


19. Inside Plastering

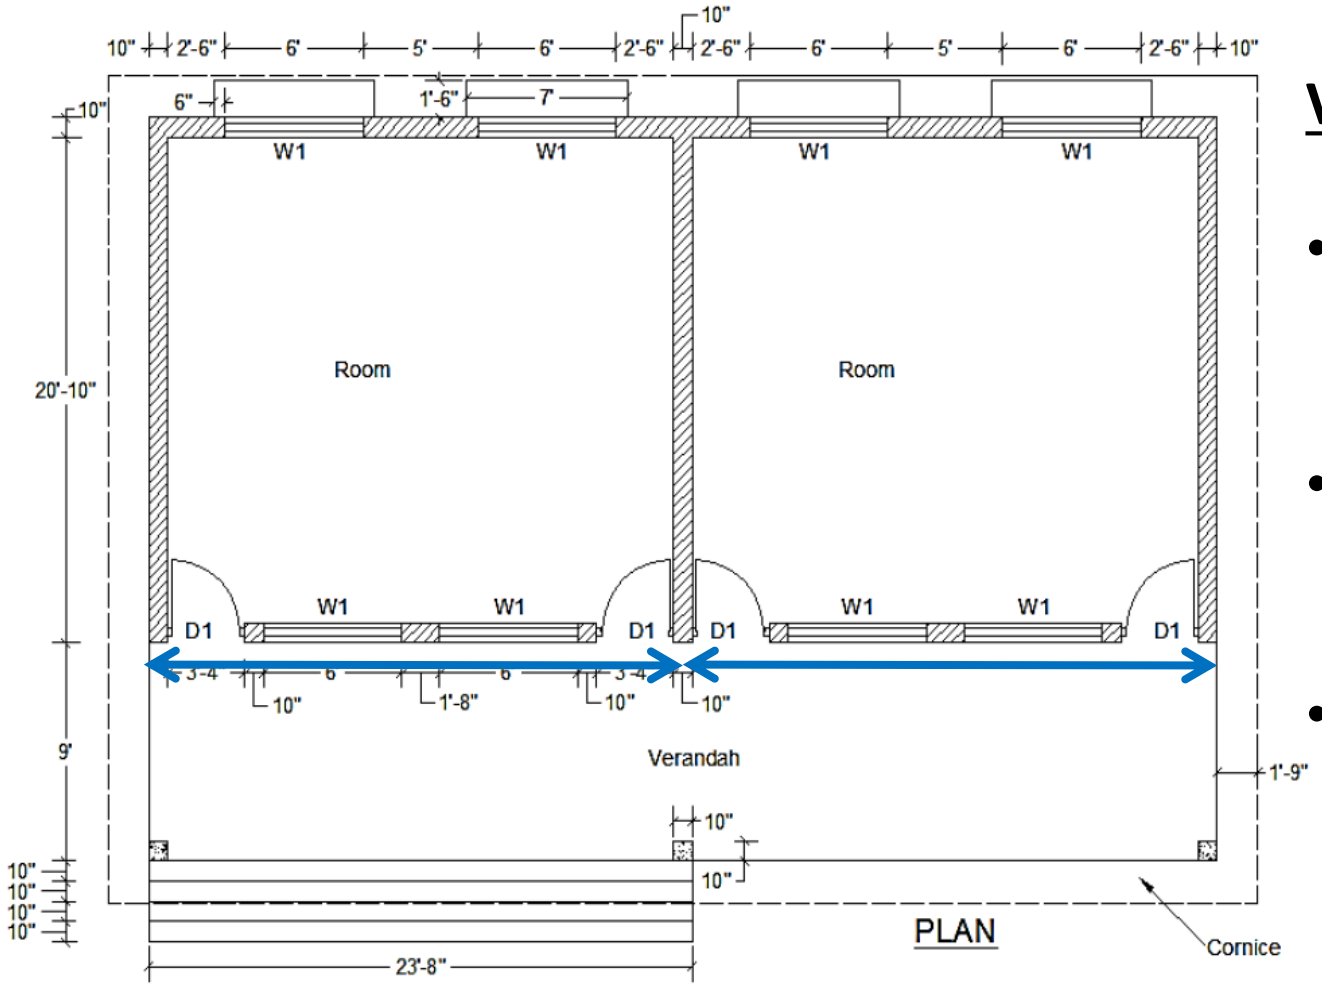

Verandah:

- Length= 2*(22’10”)+10”
- Height= 10’7”-10” skirting
- Thickness= 0.25”


19. Inside Plastering

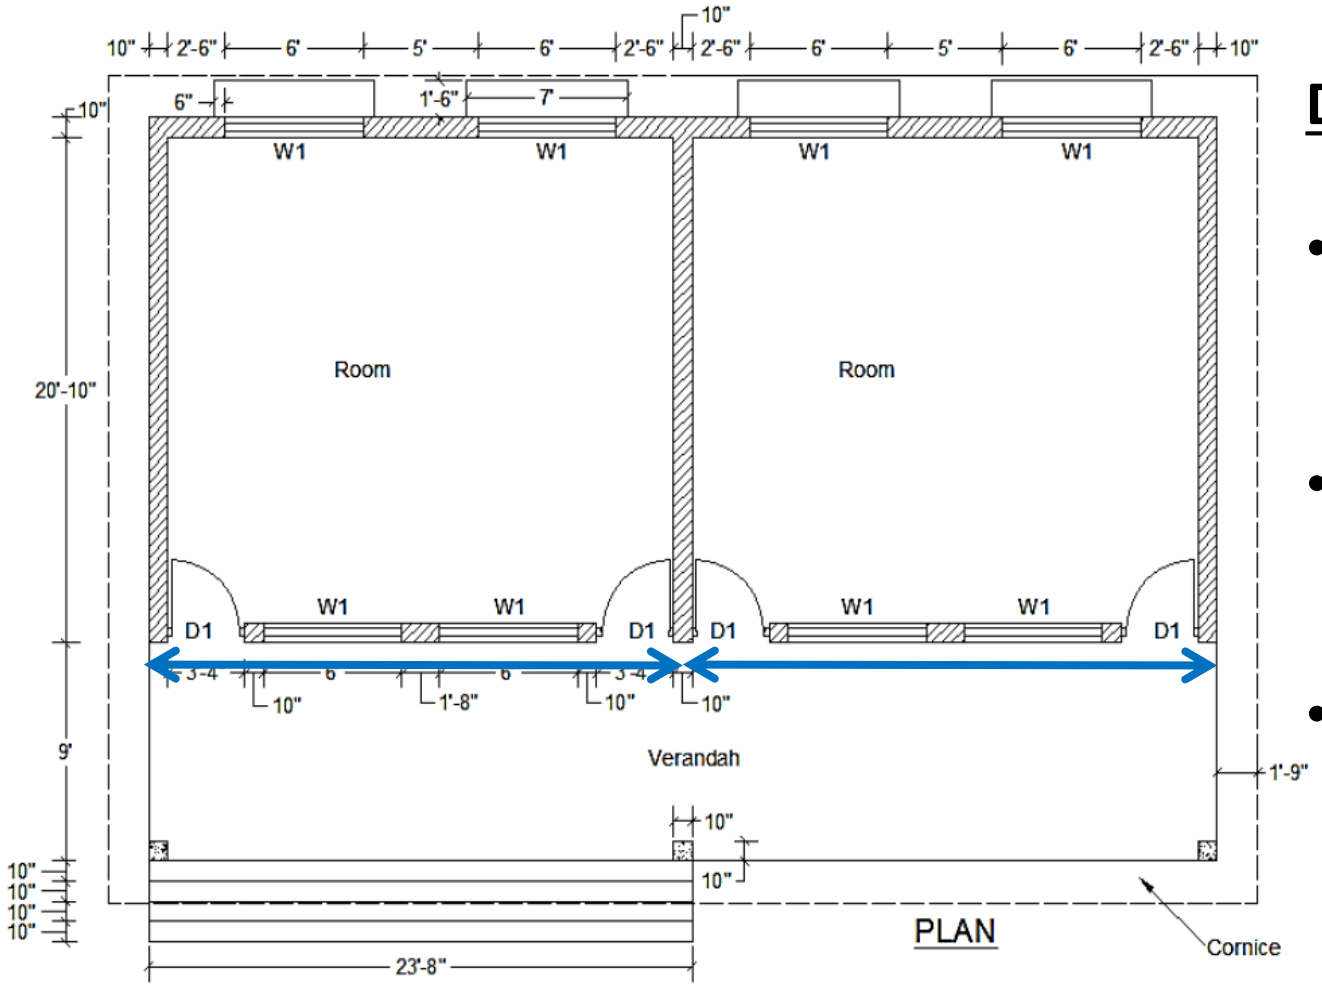

Deduct:

- Door= 4*3’4”*(7’-10” skirting)*0.25”
- Windows= 4*6’*4’6”*0.25”
- Drop wall= 2*5”*2’6”*0.25”

19. Inside Plastering

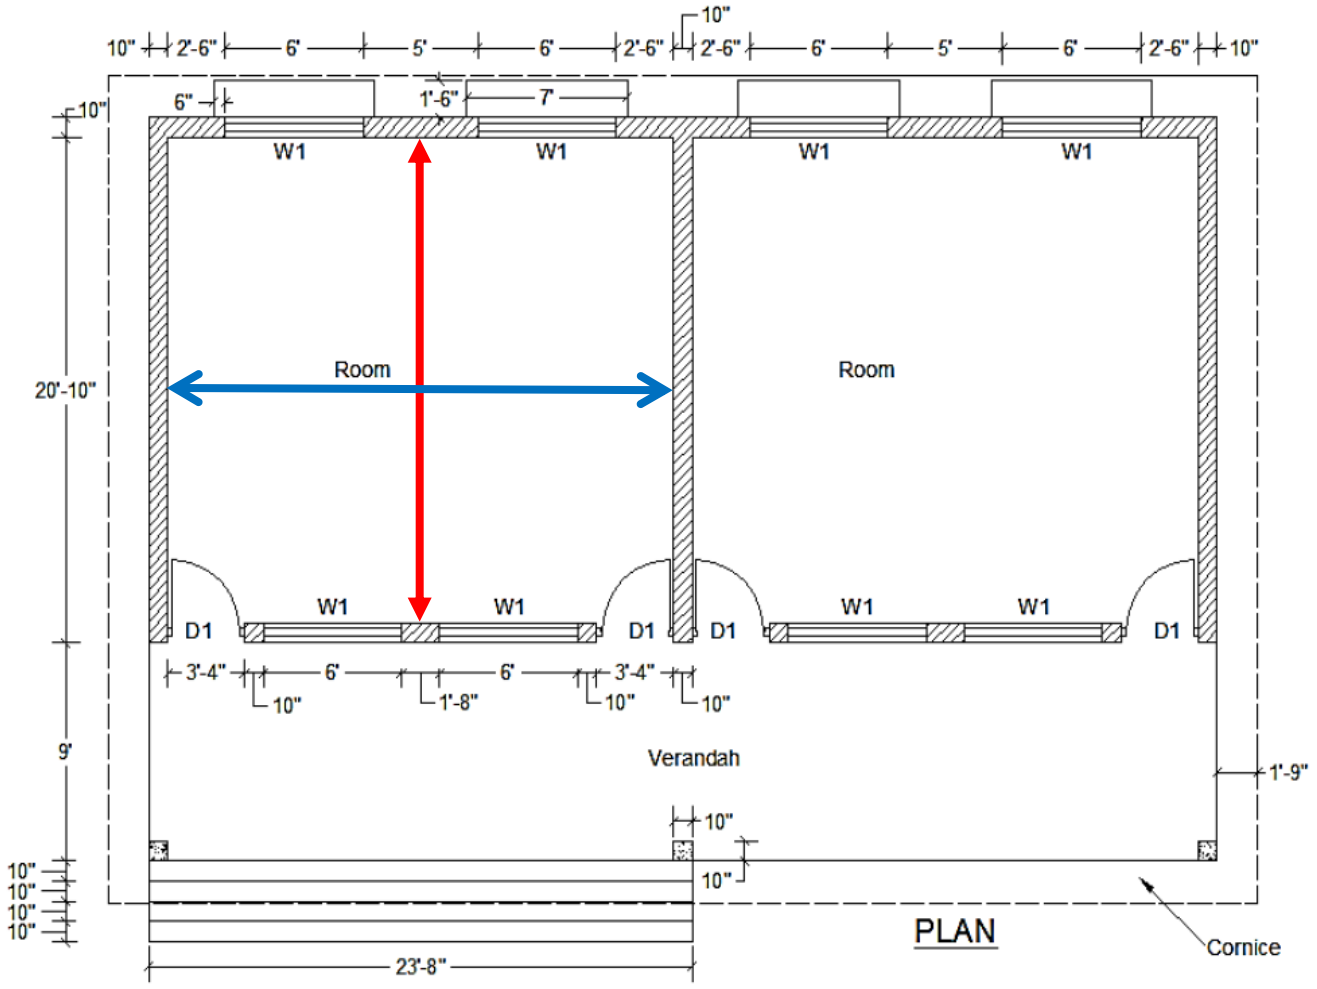


Ceiling:

1. Main Room

- Area= 2*22’*20’
- Thickness= 0.25”

19. Inside Plastering

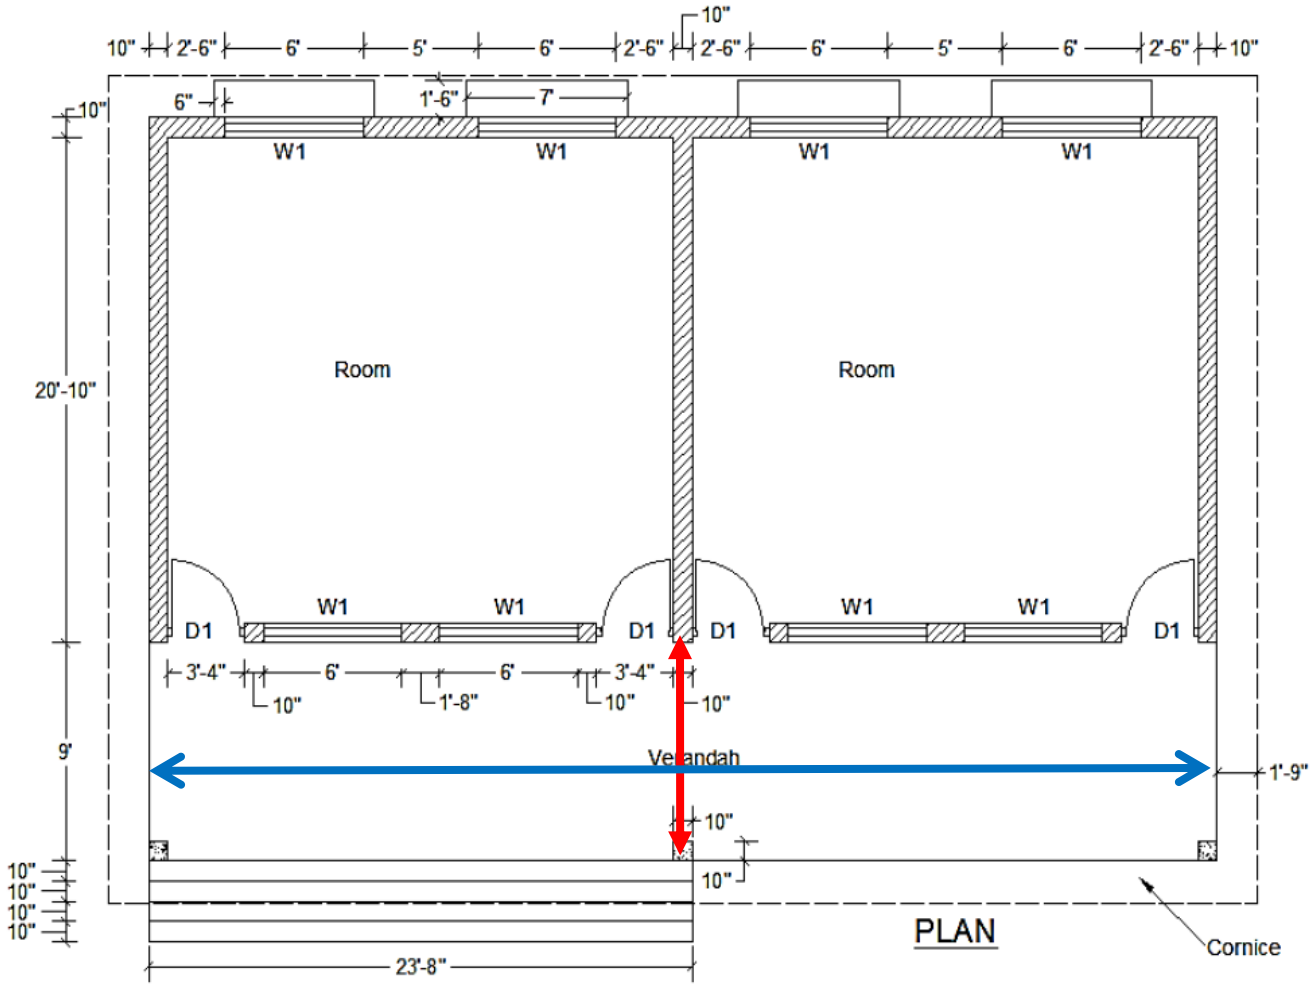


Ceiling:

1. Verandah

- Area= 46’6”*9’
- Thickness= 0.25”


19. Inside Plastering

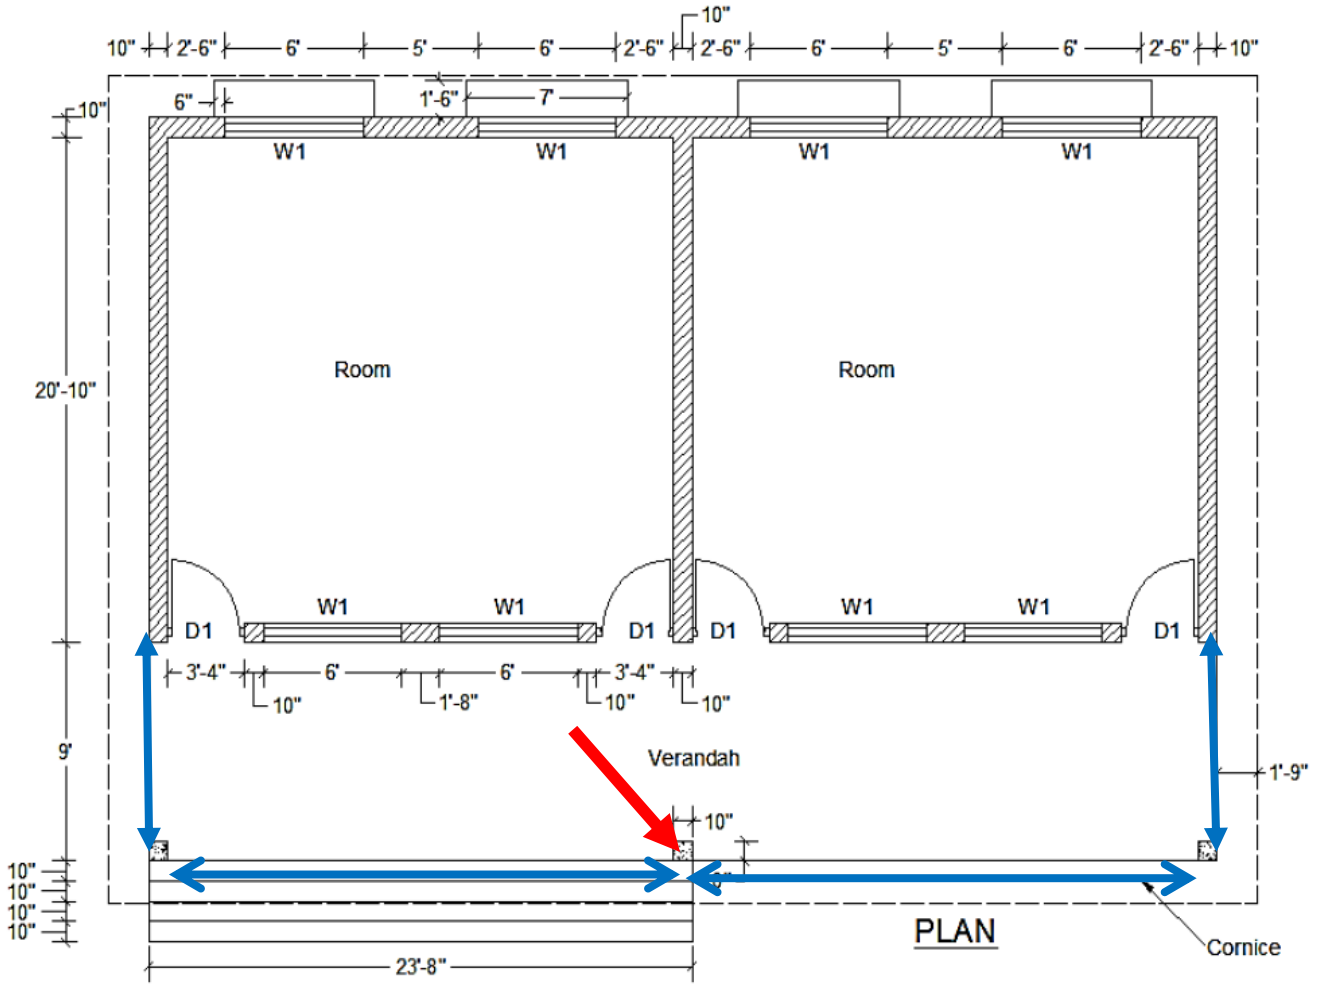


Deduct:

- Column= 3*10”*10”*0.25”
- Drop wall= (2*(8’2”+22’))*5”*0.25”

19. Inside Plastering

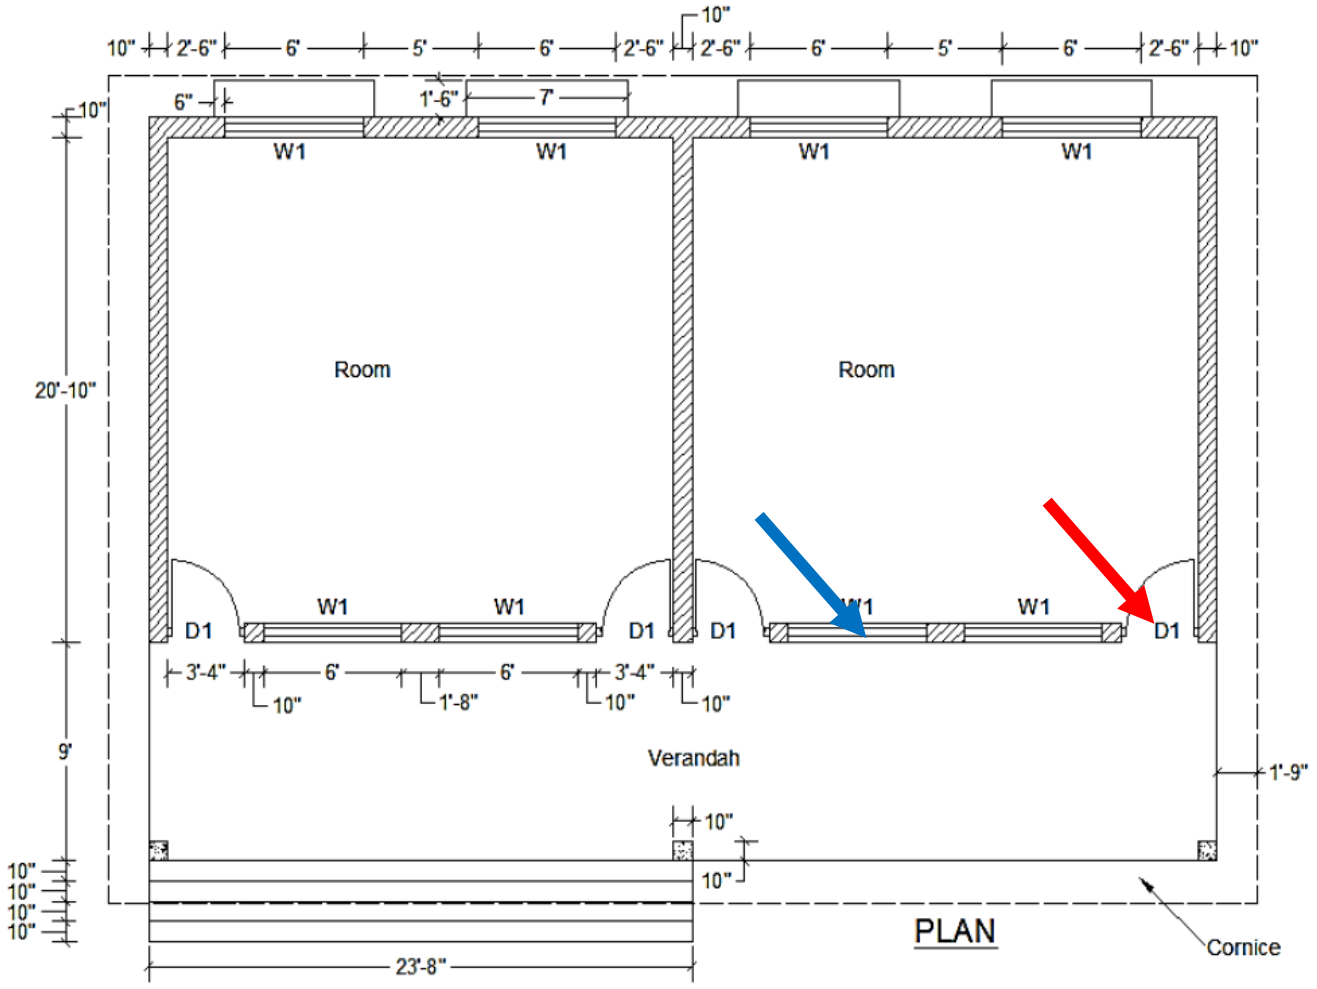


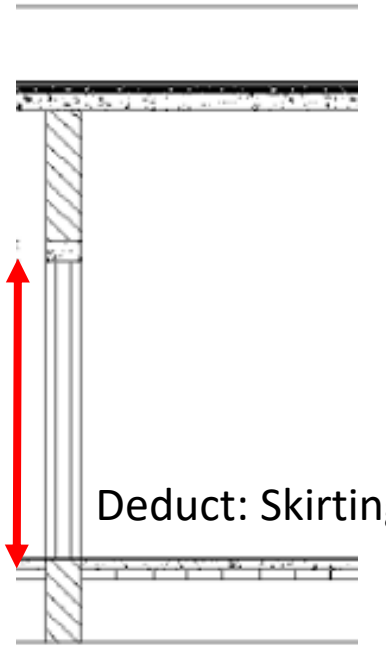


Edges:

- Door= 4*(6’2”+3’4”+6’2”)*10”*0.25”
- Window= 8*(2*(6’+4’6”))*10”*0.25”

19. Inside Plastering

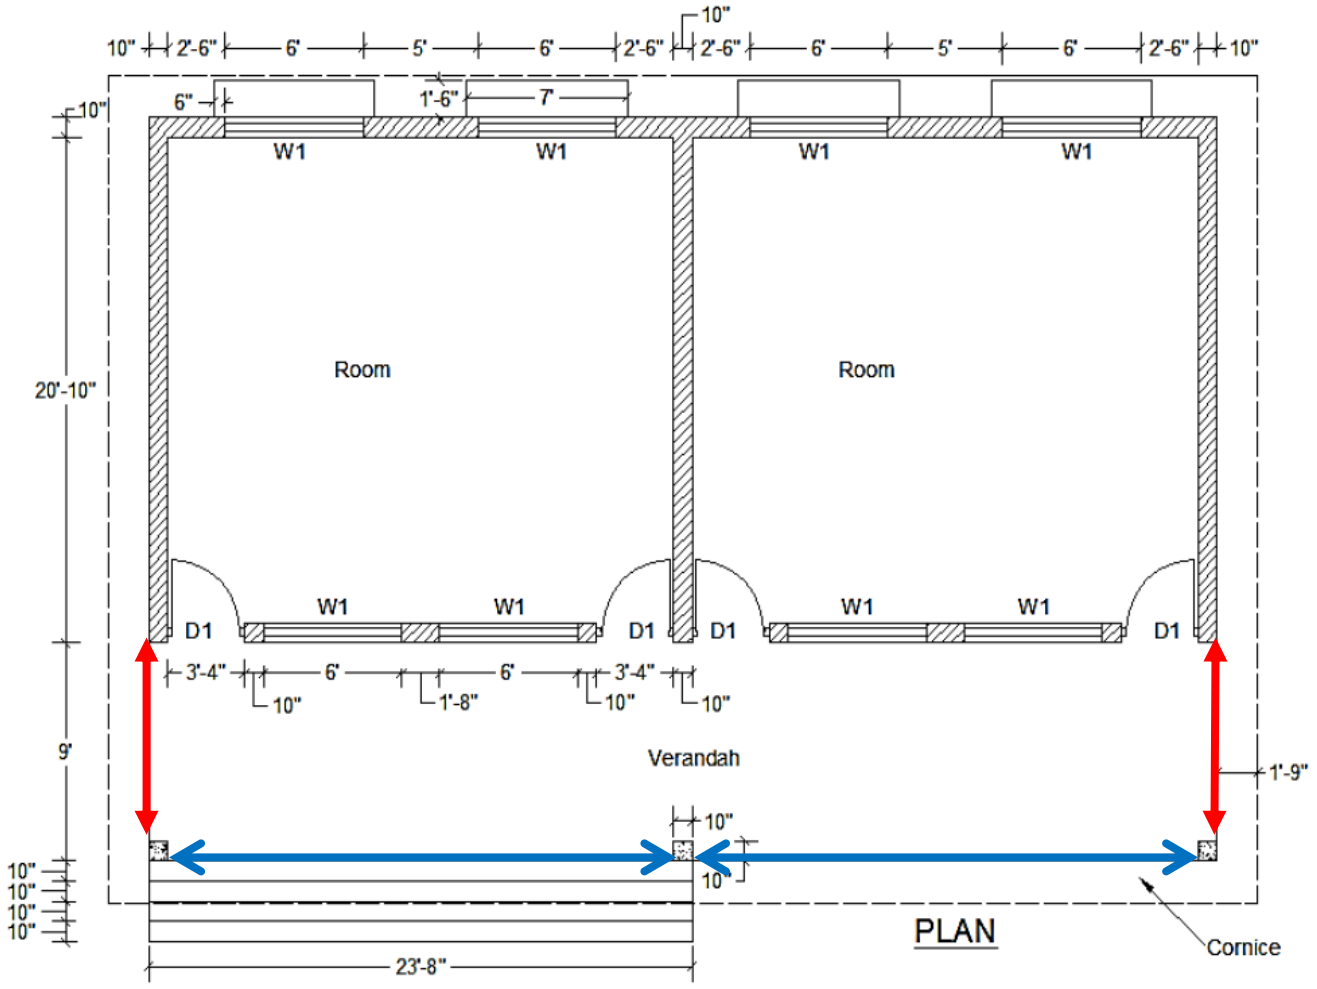


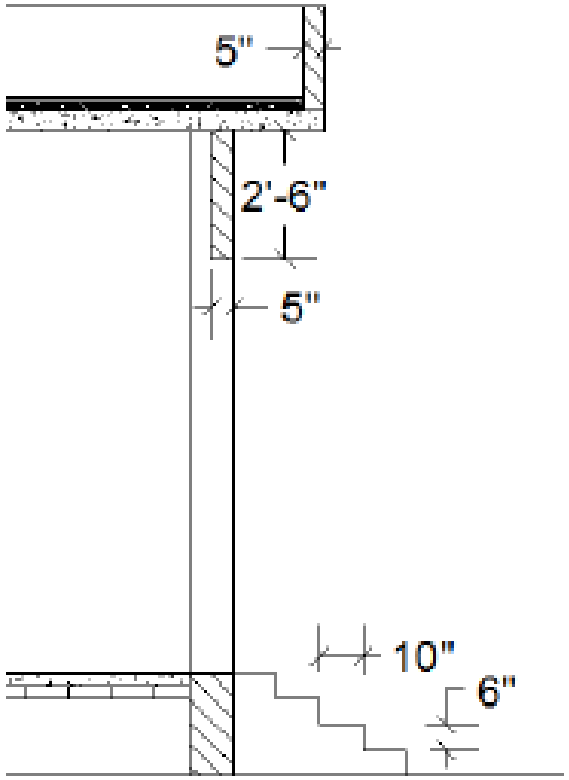

Drop Wall:

- Inside= 2*(9’-10”)+2*(22’10’-10”)*2’6”*0.25”


20. Outside Plastering

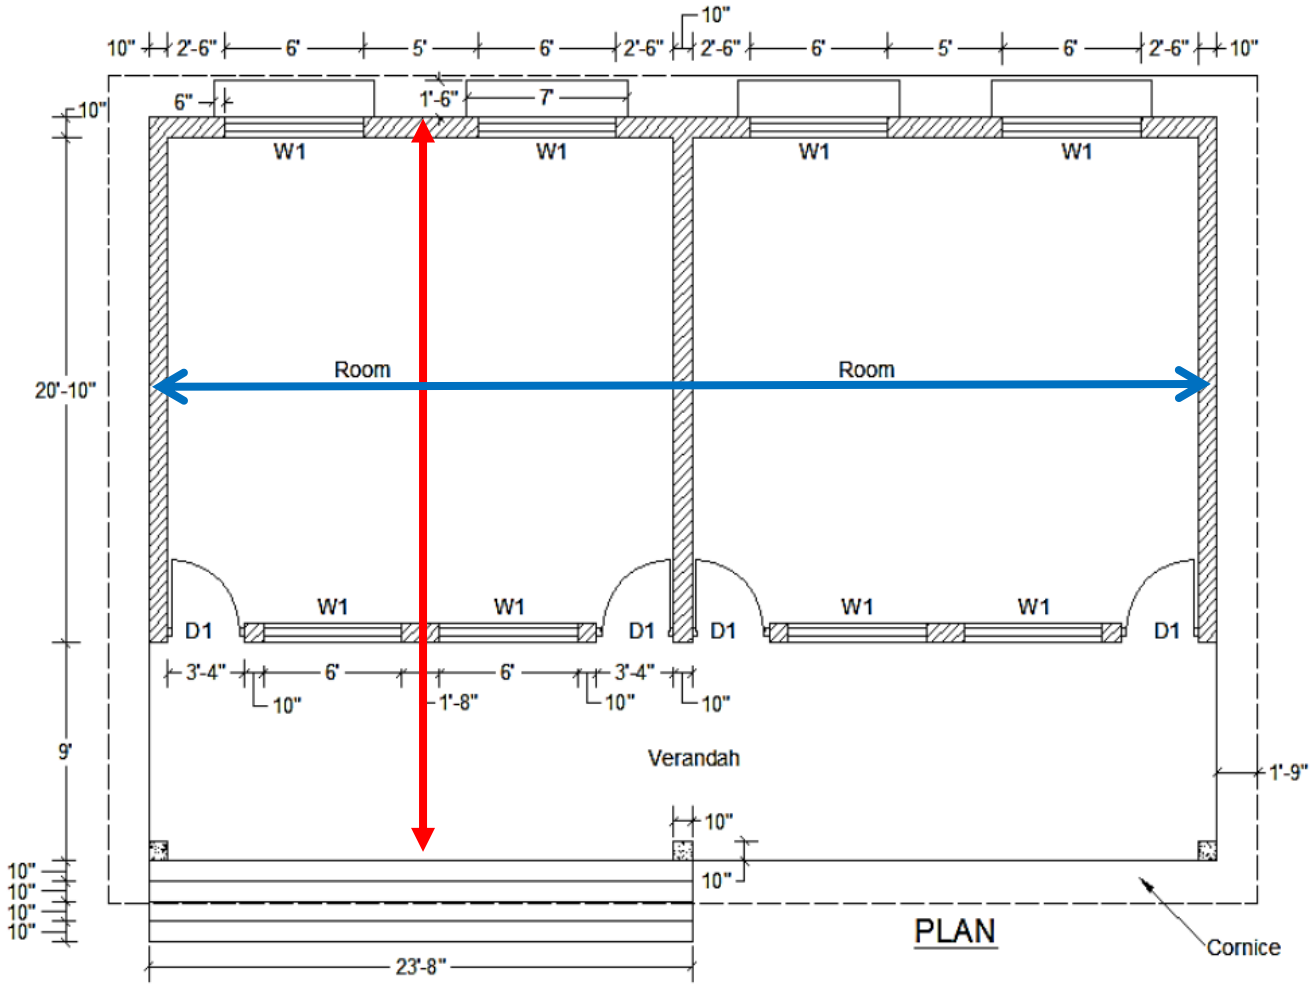

GL to PL:

- Length= 2*(46’6”’+ 30’8”)
- Height= 2’
- Thickness= 0.5”


20. Outside Plastering

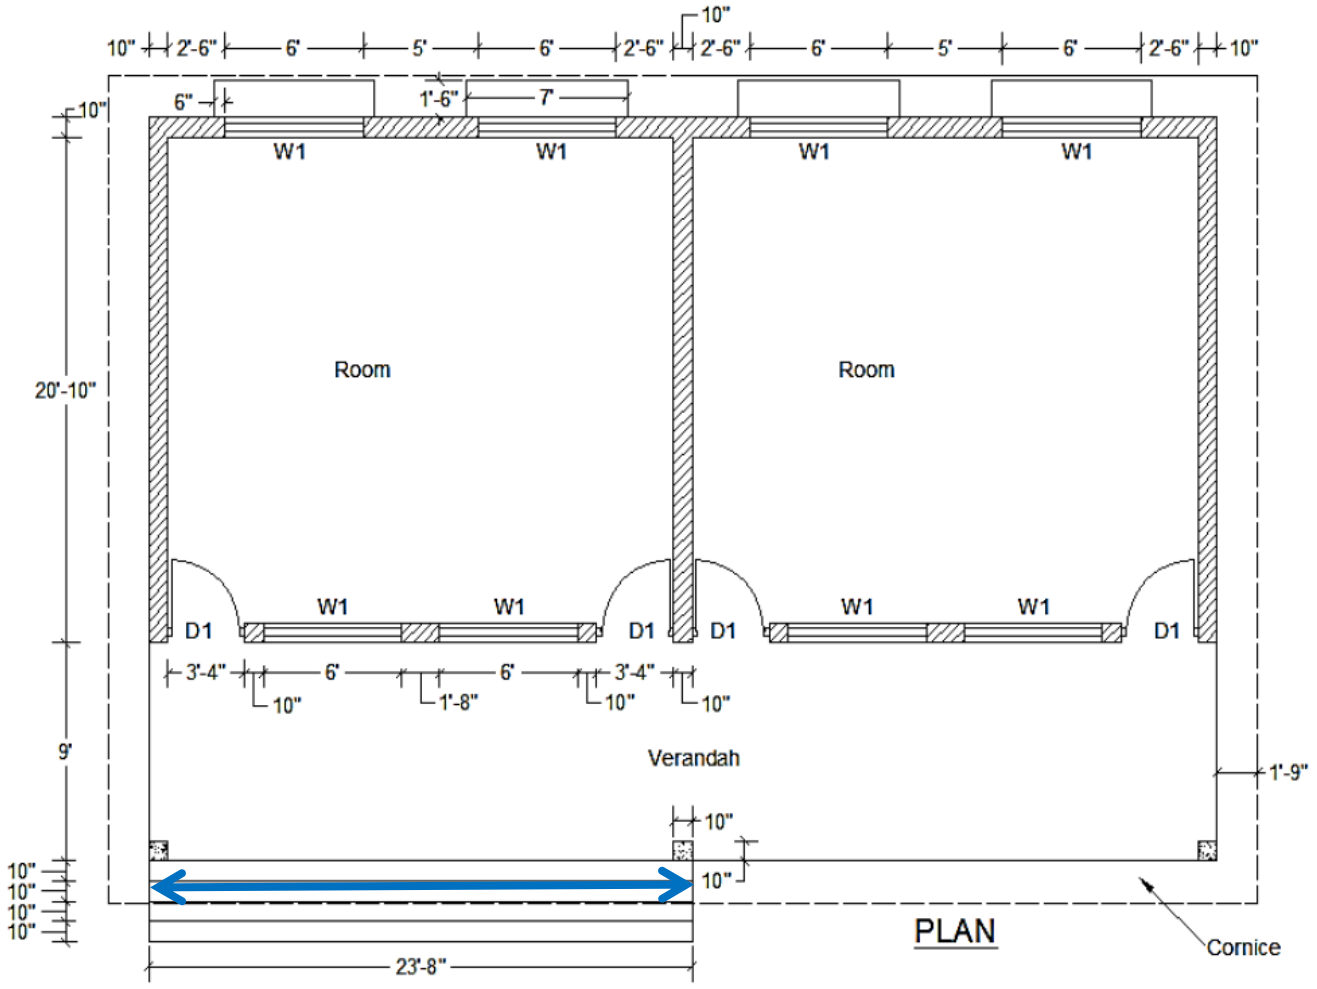

Deduct:

- Stair= 23’8”*2’*0.5”


20. Outside Plastering

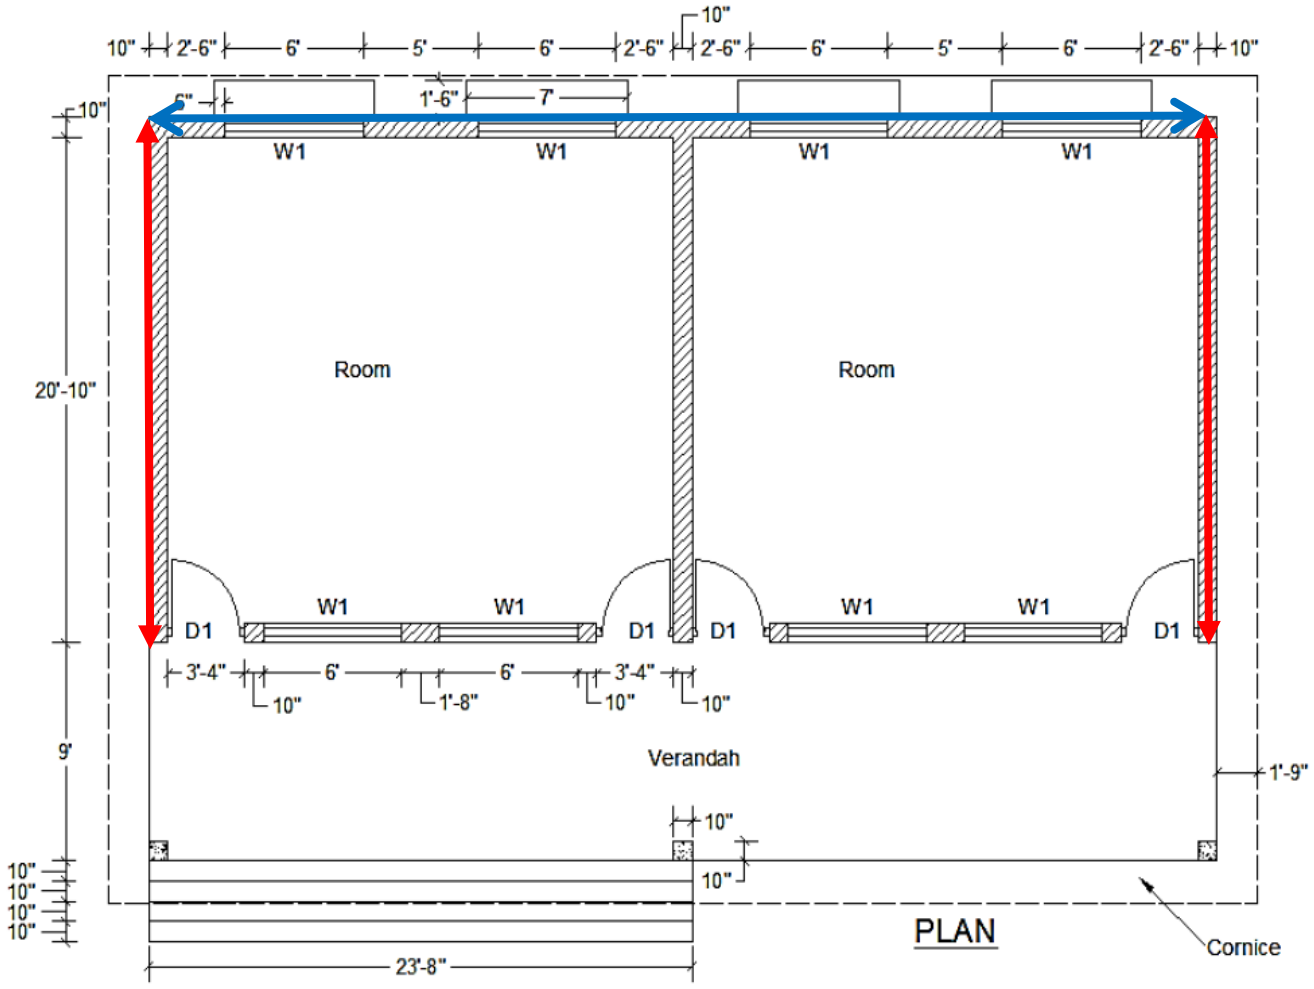

Outside Wall:


- Length= 46’6”’+ 2*21’8”
- Height= 10’7”
- Thickness= 0.5”

20. Outside Plastering

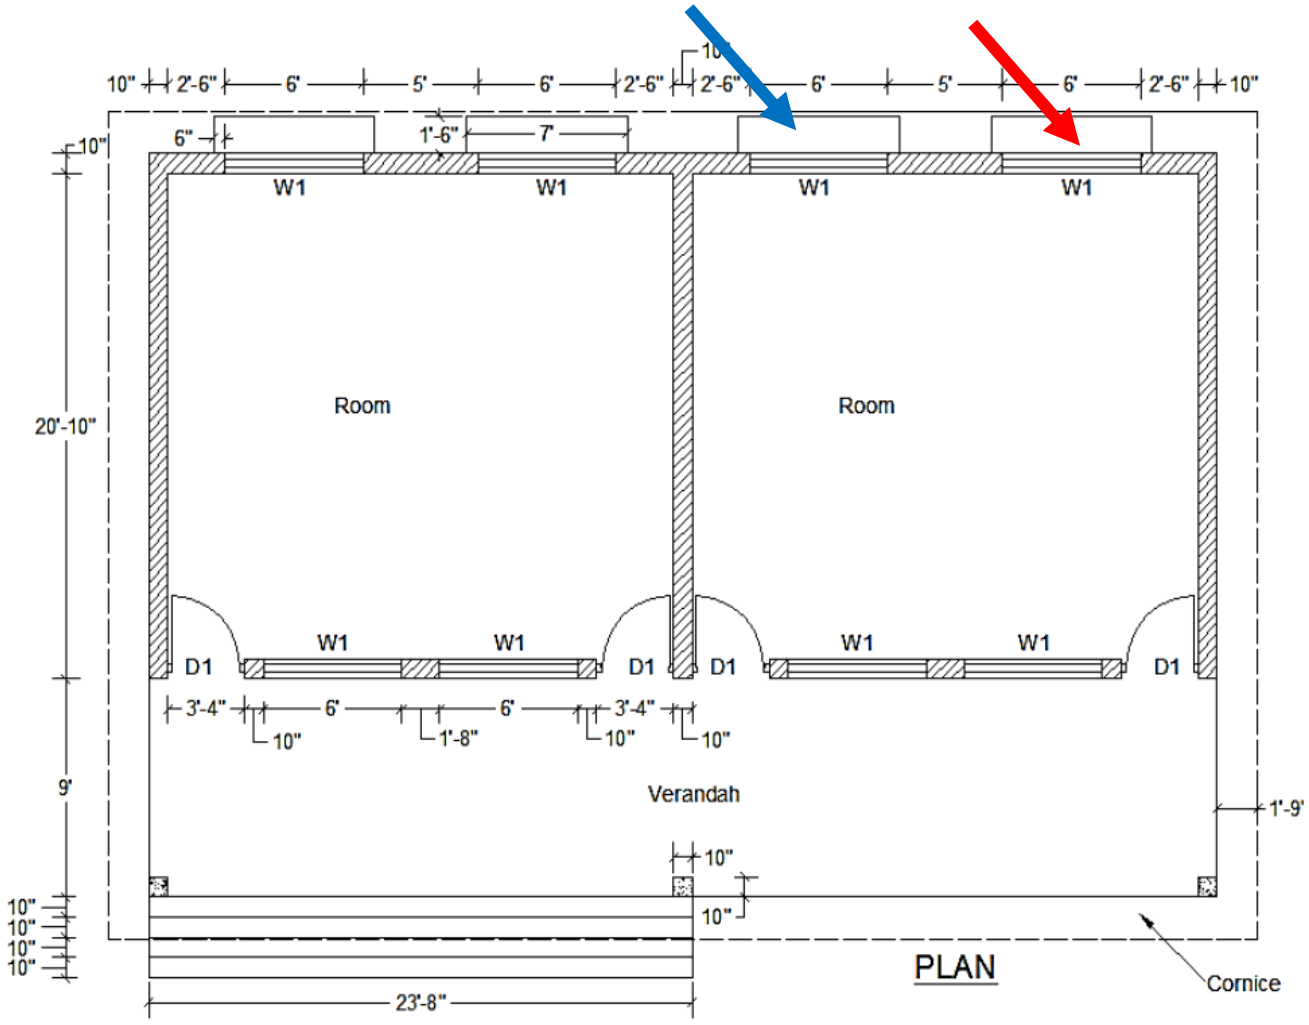


Deduct:

- Window= 4*6’*4’6”*0.5”
- Sunshade= 4*7’*4”*0.5”

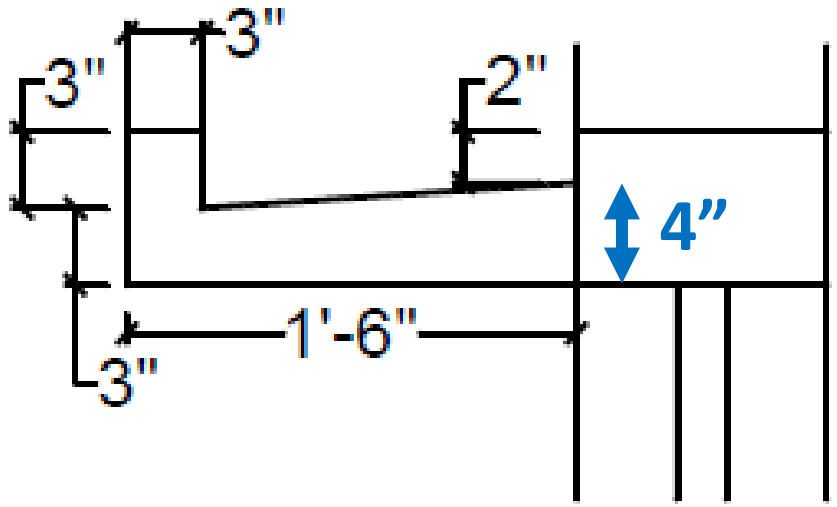


20. Outside Plastering

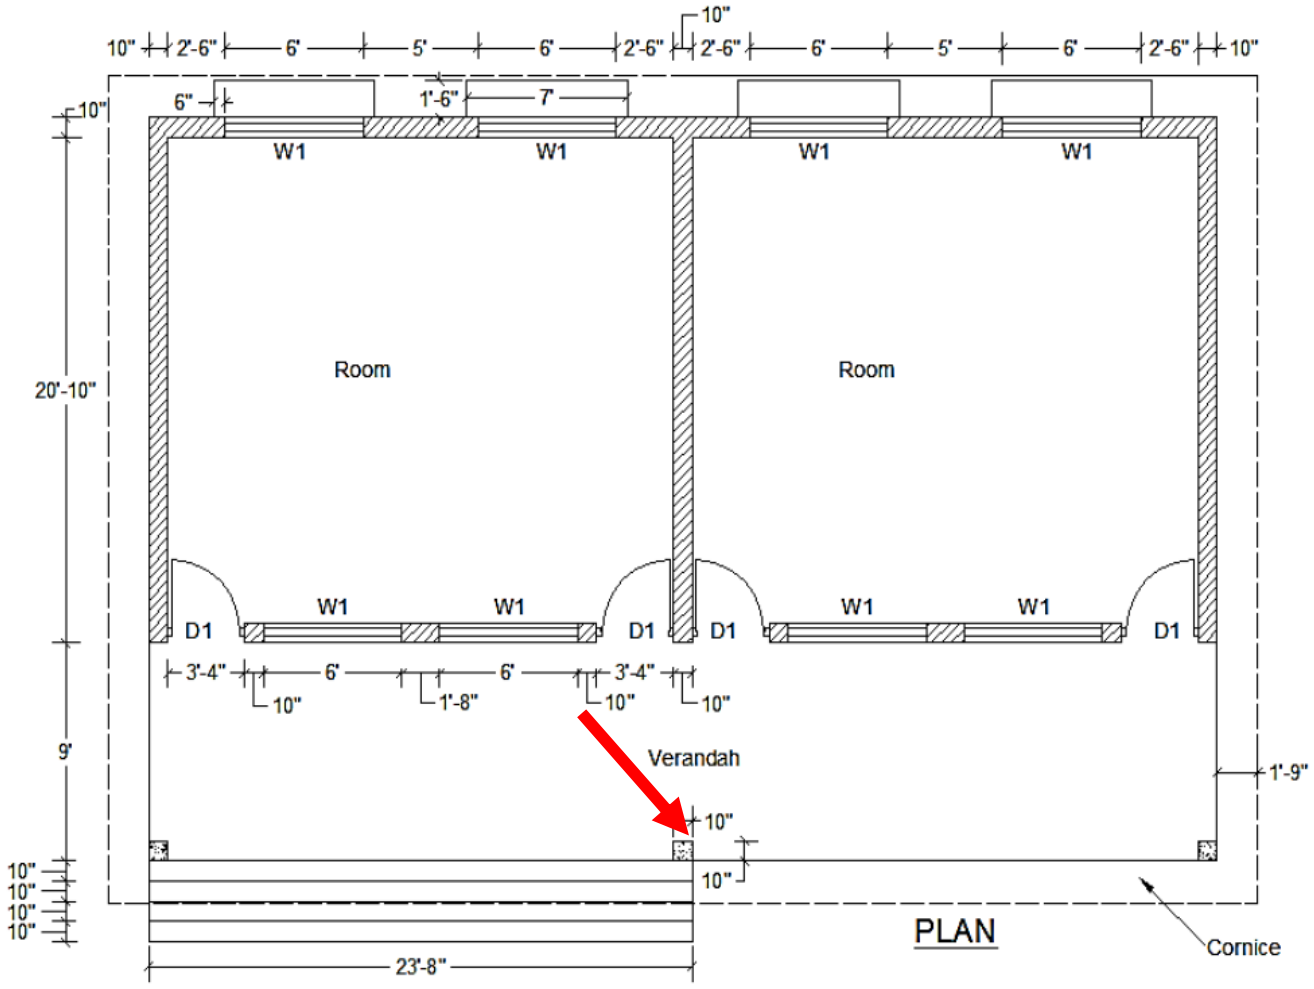

Column:

- Number = 3
- Face Area = 10”*4
- Height= 10’7”-10”
- Thickness= 0.5”


20. Outside Plastering

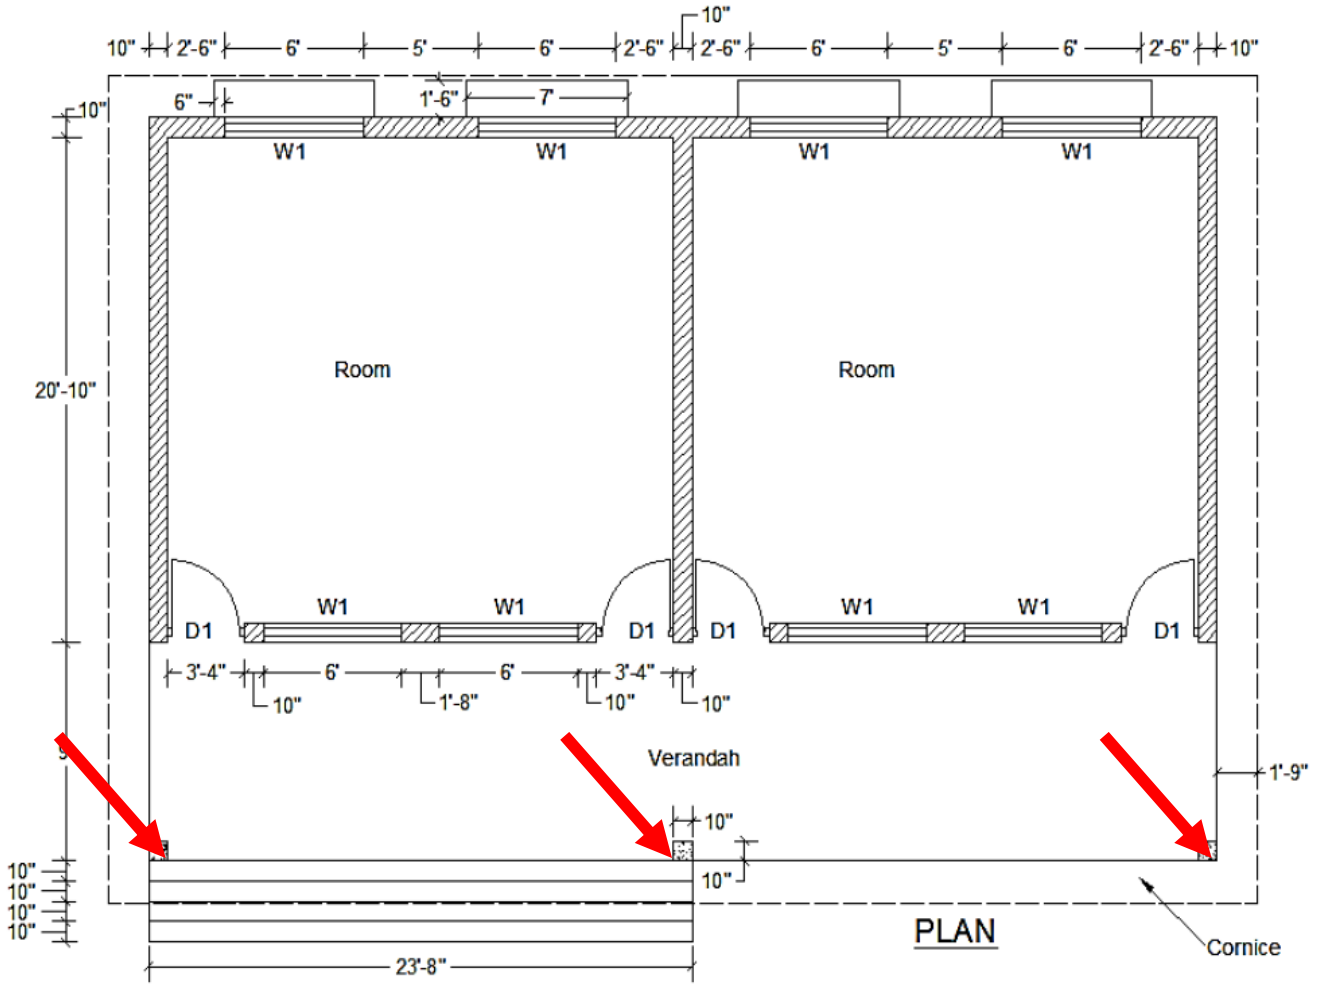

Deduct:

- Drop wall= 6*(2’6”*5”*0.5”)


20. Outside Plastering

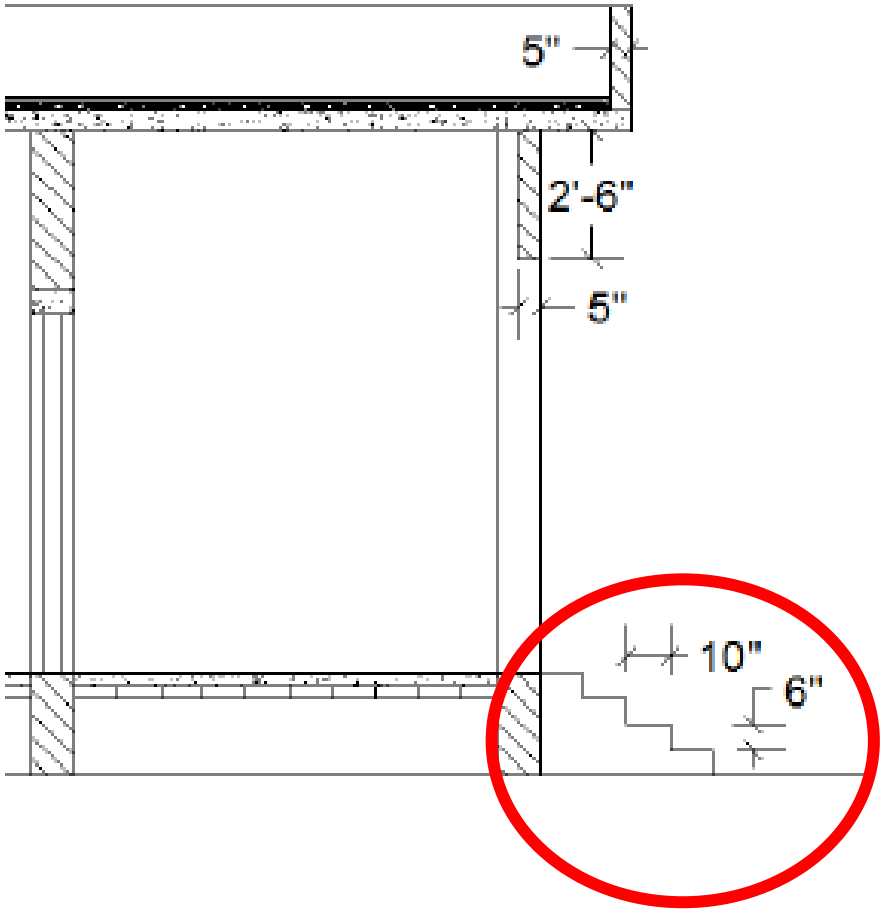

Stair:

- 1st step = 2*10”*6”*0.5”
- 2nd step = 2* (2*10”*6”*0.5”)
- 3rd step = 3* (2*10”*6”*0.5”)
- 4th step = 4* (2*10”*6”*0.5”)

20. Outside Plastering

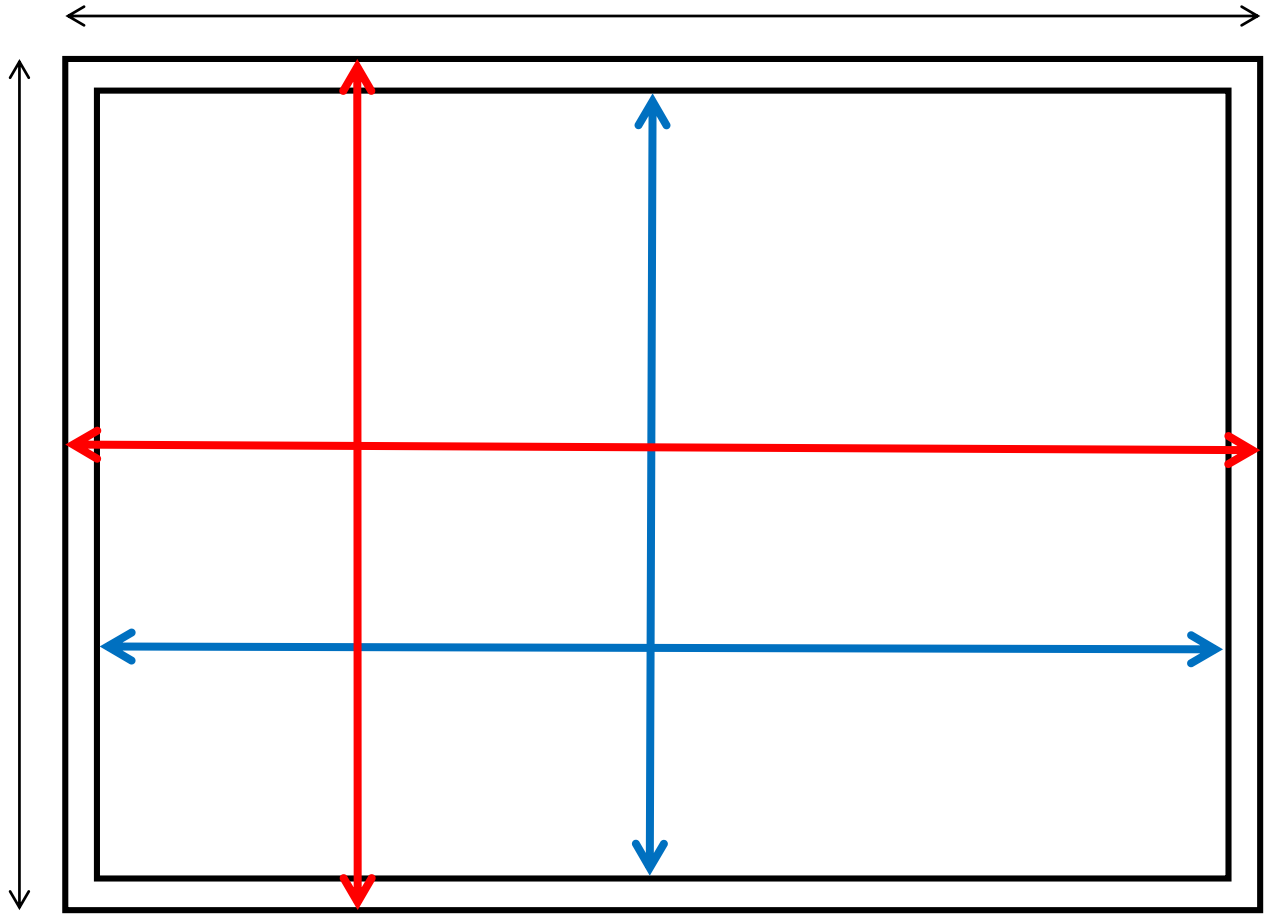

Parapet:

1. Inside

2*((34’2”-10”)+(50’-10”)***2’***0.5”


2. Outside

2*(34’2”+50’)***2’***0.5”

3. Top

2*(33’9”+49’7”)***5”***0.5”

20. Outside Plastering

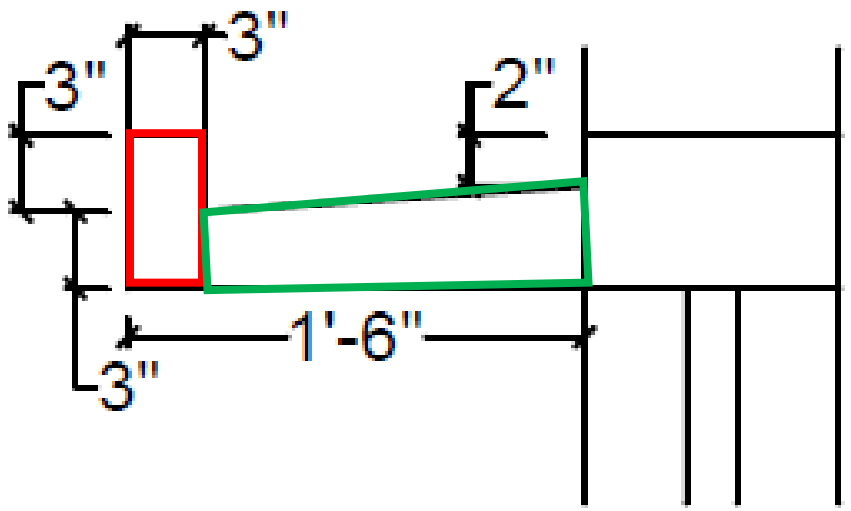


Sunshade:


1. Bottom= 4* (7’*1’6”*0.5”)
2. Side= 4*[{(6”*3”+0.5*(3”+4”)*15”)}*2*0.5”]
3. Front= 4* (7’*6”*0.5”)
4. Top= 4* {7’*(3”+15.04”)*0.5”}
5. Inside= 4*(3”*7’*0.5”)

20. Outside Plastering

Cornice

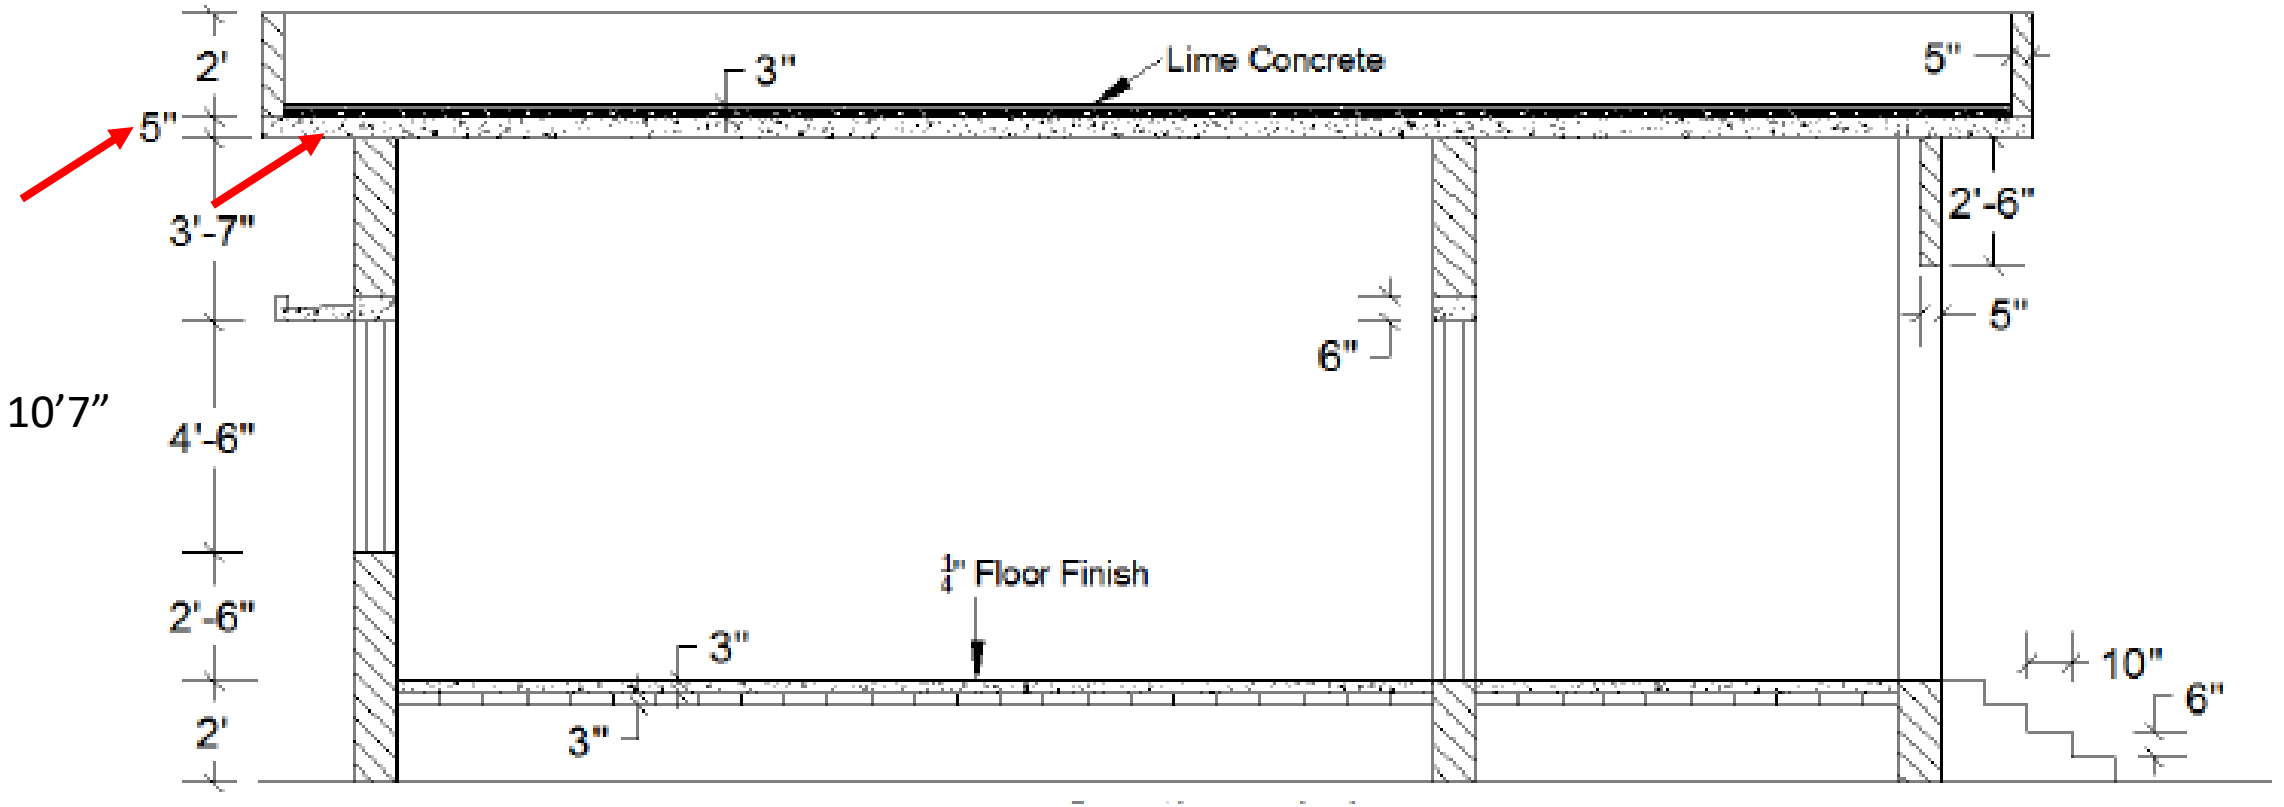


20. Outside Plastering

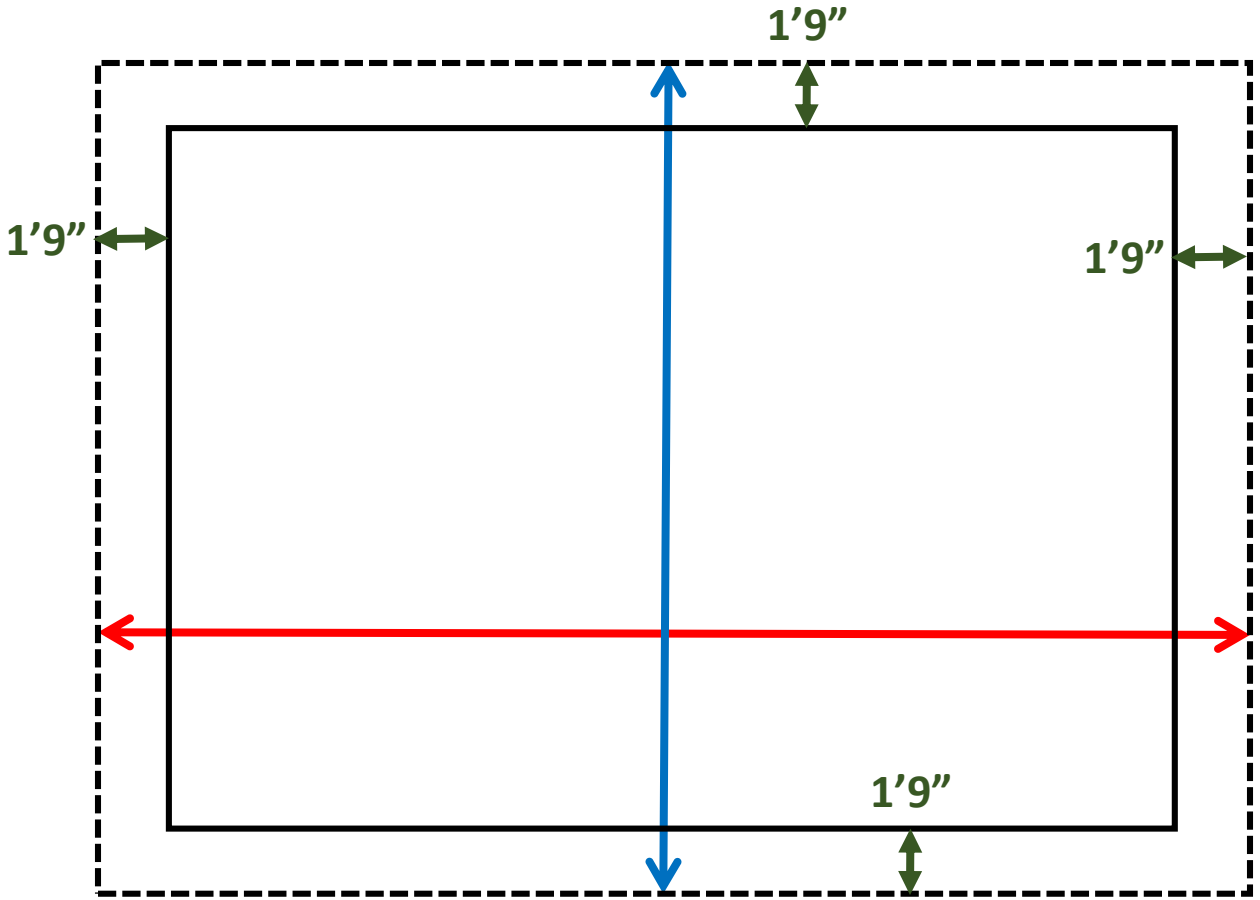


Cornice:

- Side edge= 2* (50’+34’2”)*5”*0.5”
- Bottom edge= 2* (48’3”+32’5”)*1’9”*0.5”

20. Outside Plastering

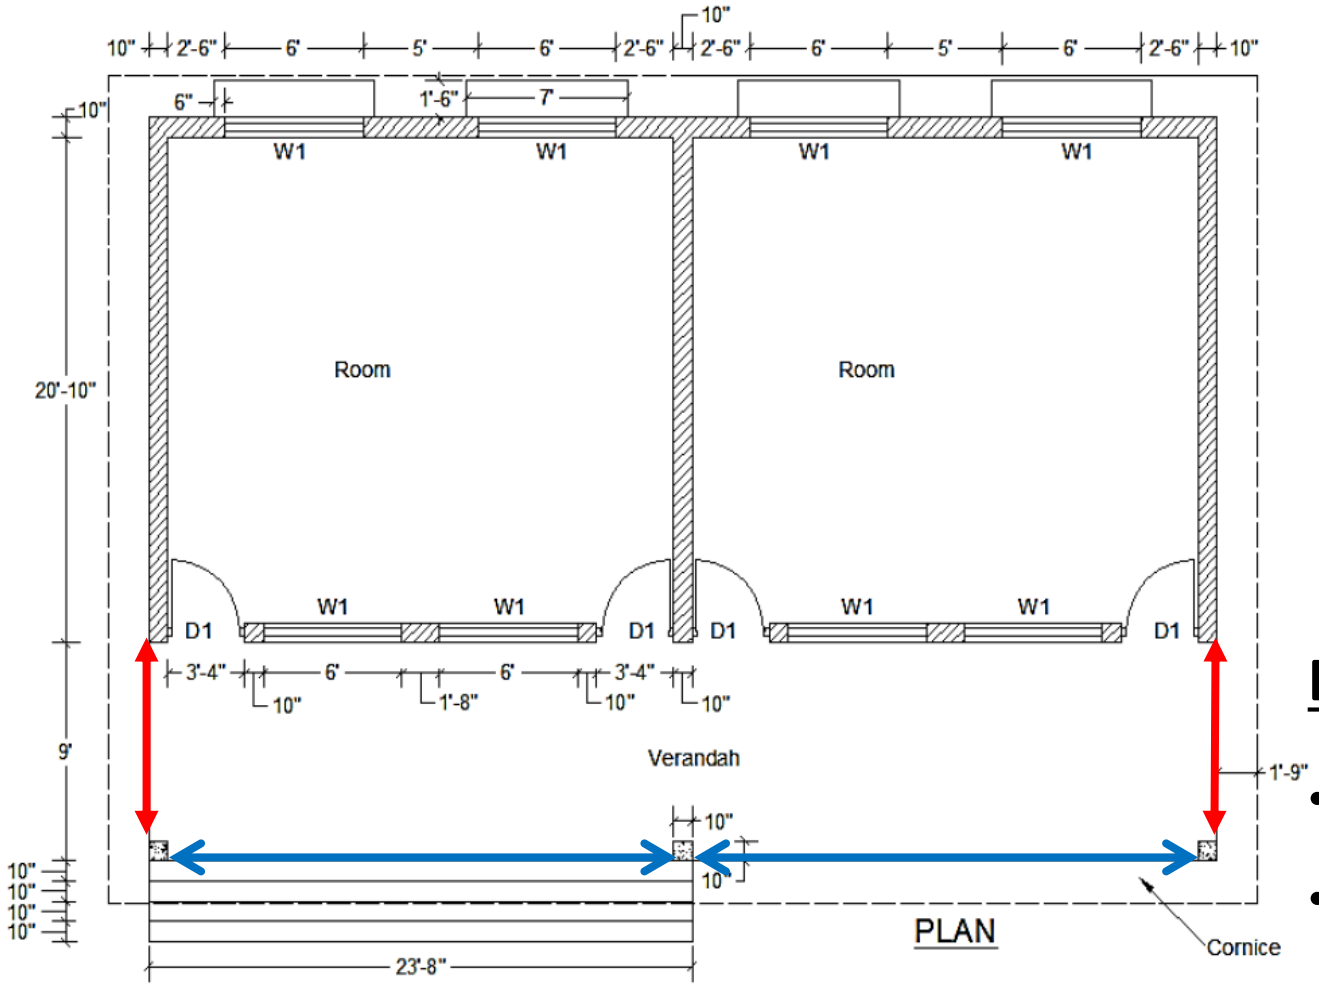


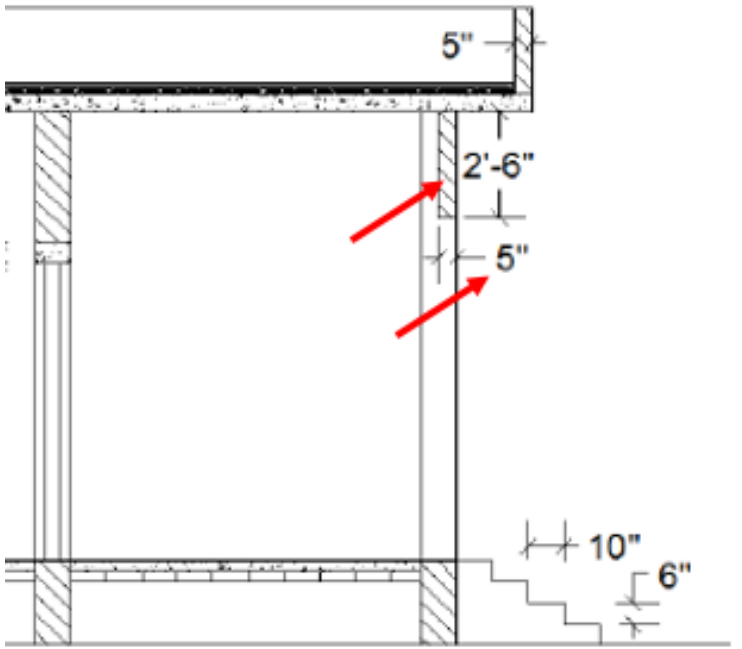

Drop wall:

- Outside= 2*(9’-10”)+2*(22’10’-10”)*2’6”*0.5”
- Bottom edge= 2*(9’-10”)+2*(22’10’-10”)*5”*0.5”


21. Skirting

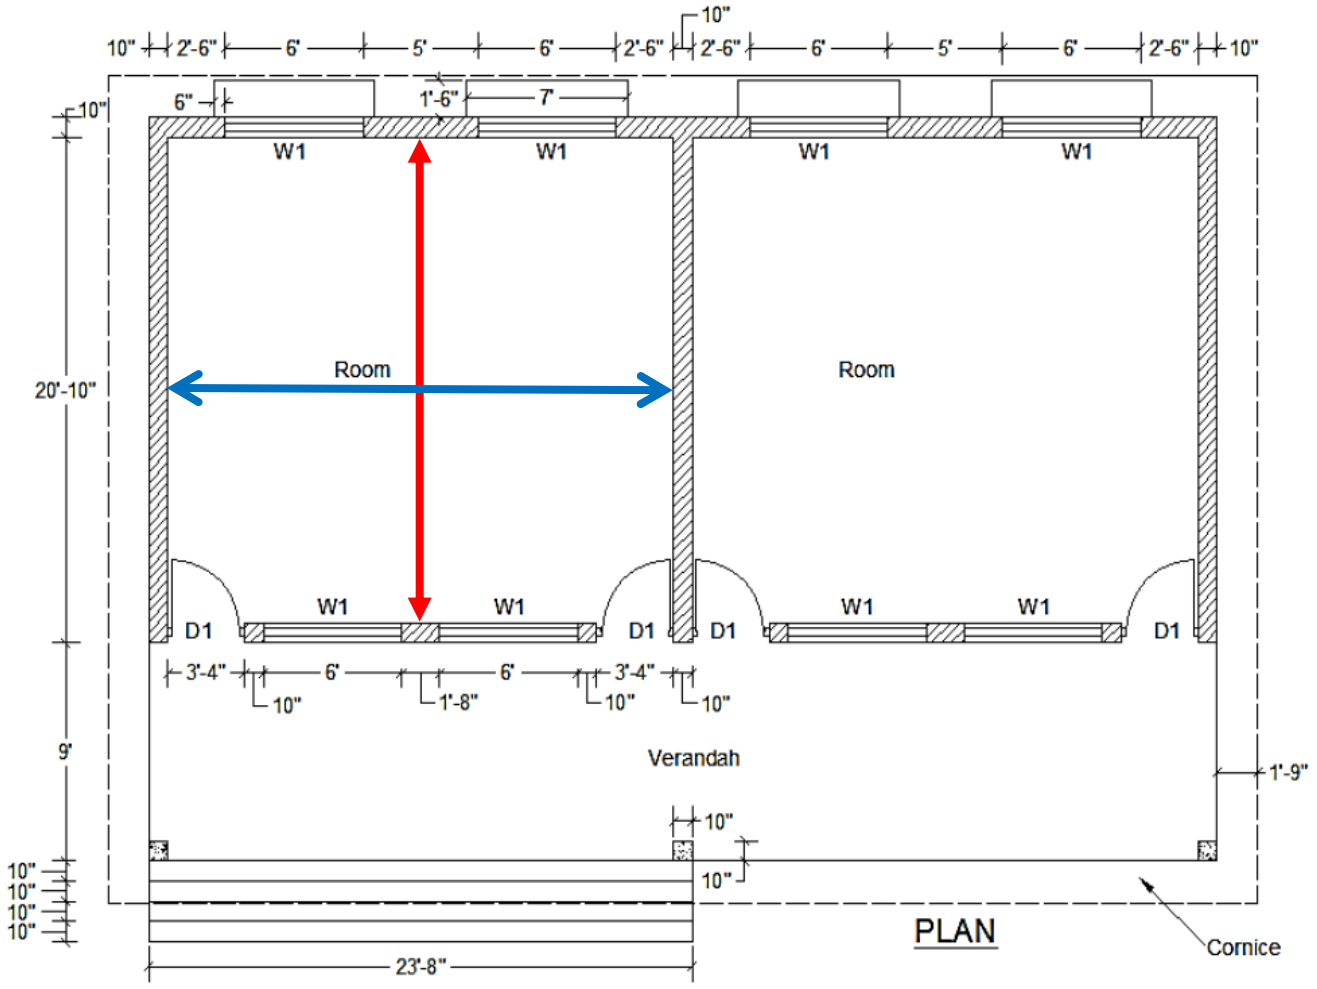

Main Room:

- Length= 2*(22’+ 20’)
- Height= 10”
- Thickness= 0.75”


21. Skirting

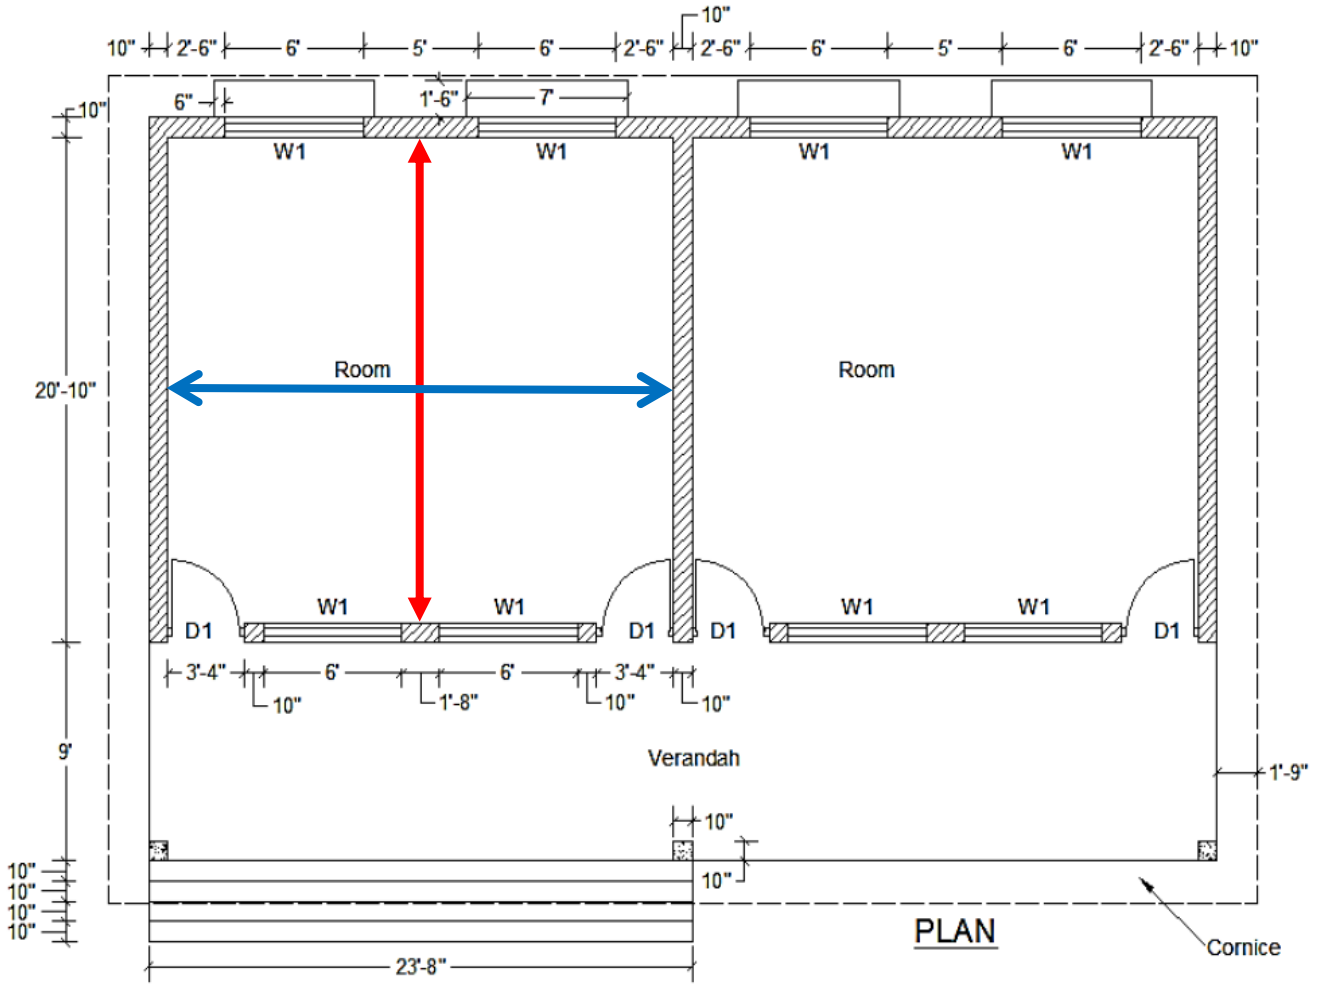

Deduct:

- Door= 2*3’4”*10”*0.75”


21. Skirting

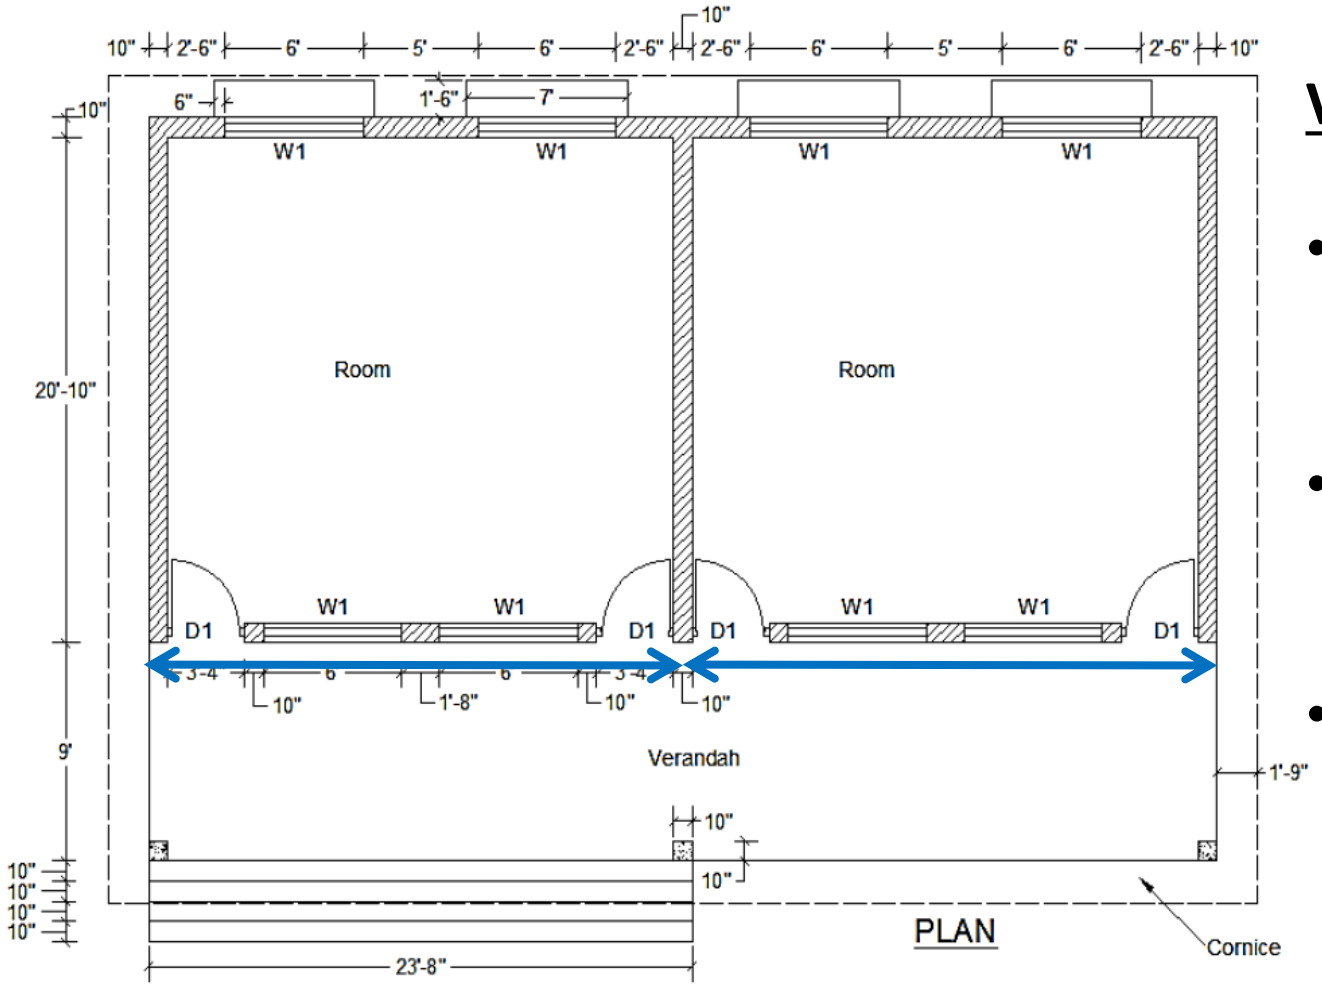

Verandah:

- Length= 2*(22’10”)+10”
- Height= 10”
- Thickness= 0.75”


21. Skirting

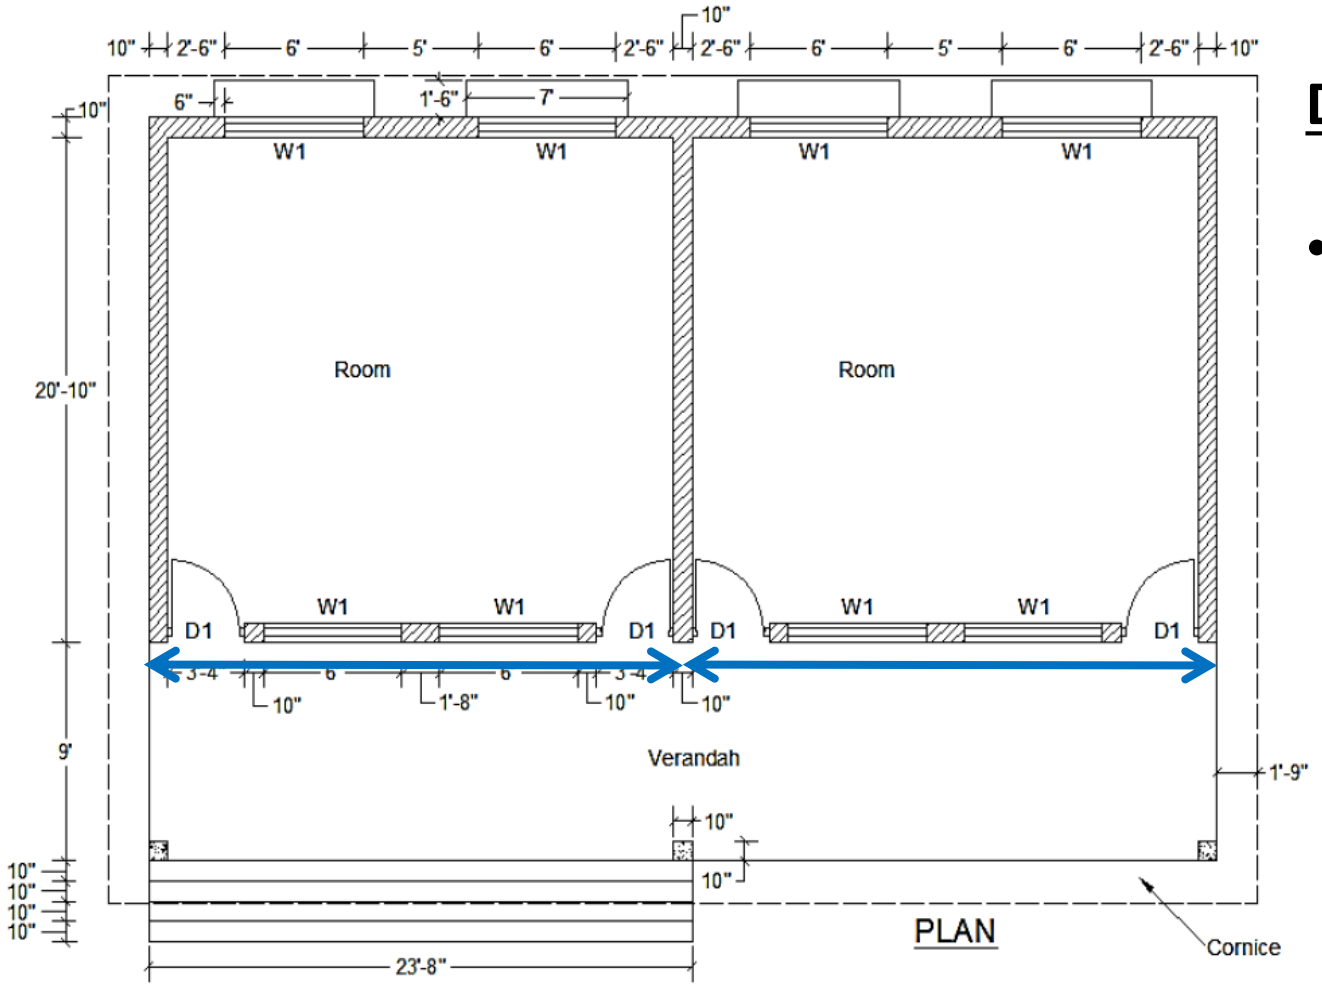

Deduct:

- Door= 4*3’4”*10”*0.75”


21. Skirting

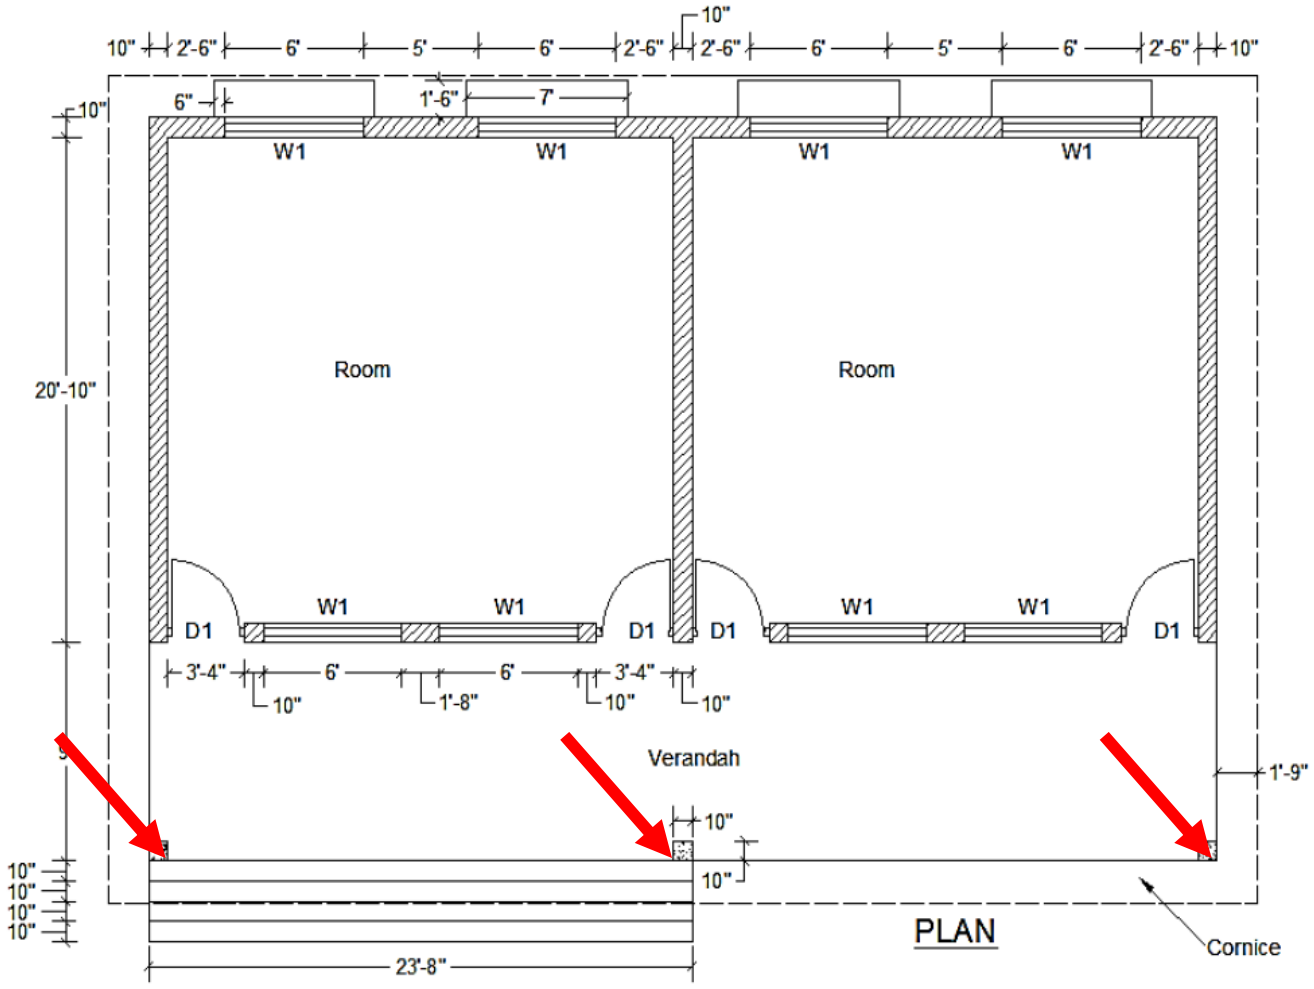

Column:


- Number = 3
- Face Area = 10”*4
- Height= 10”
- Thickness= 0.75”

22. RCC in Drop walls

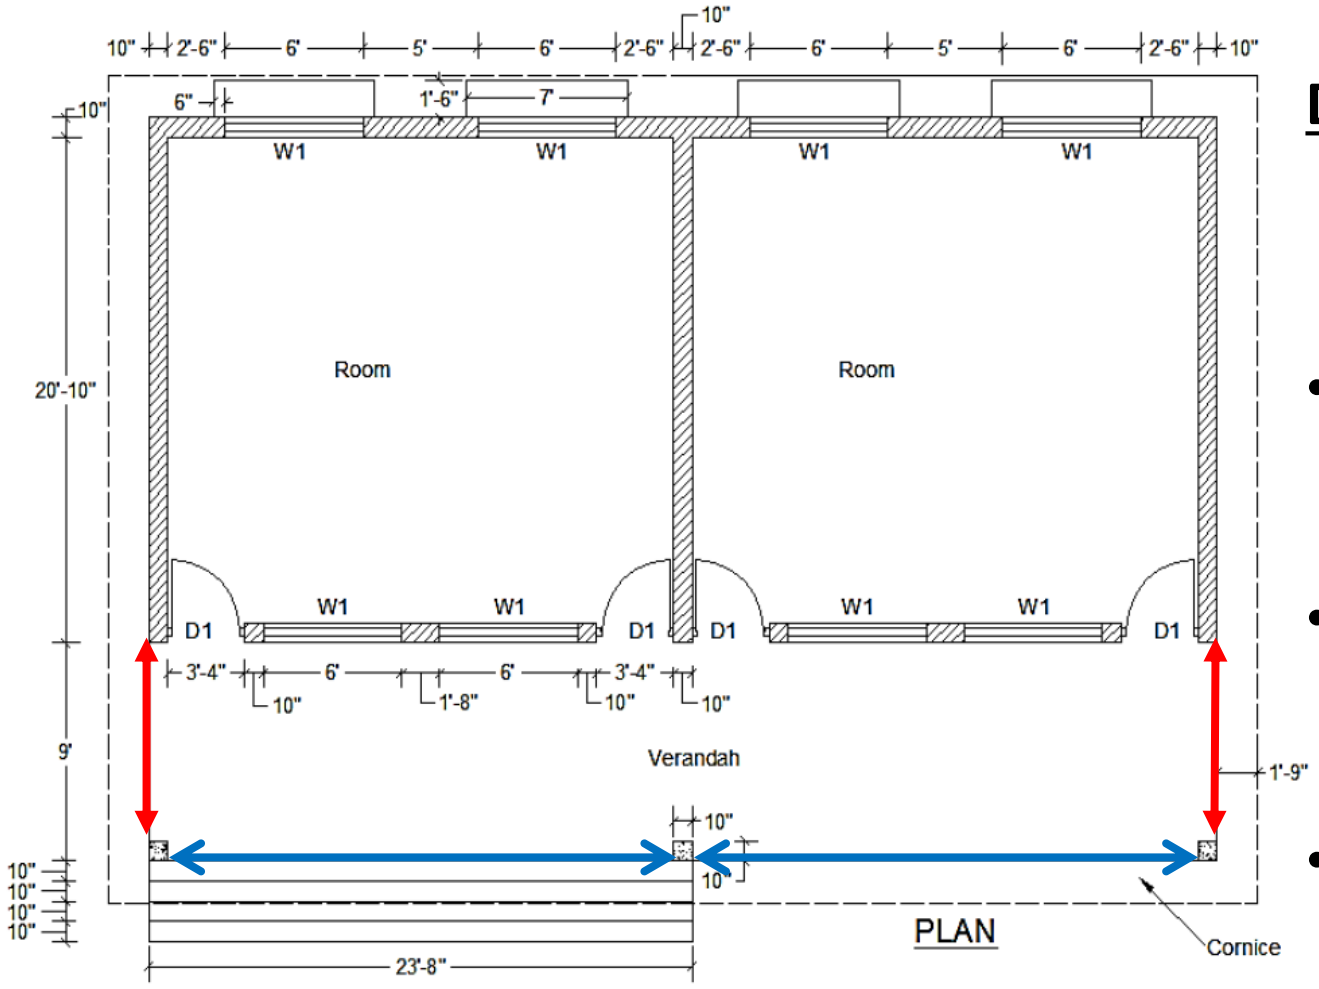


Drop wall:


- Height= 2’6”
- Width= 5”
- Length= 2*(9’-10”)+2*(22’10’-10”)

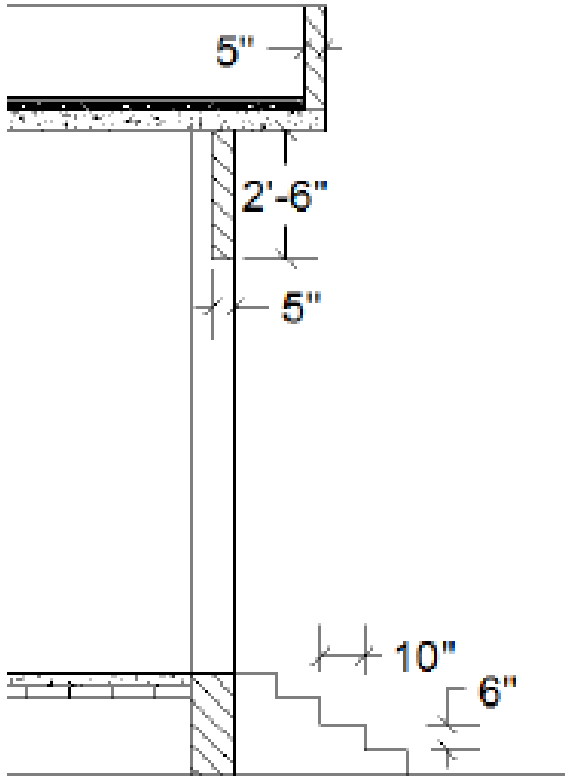

23. RCC in Sunshades

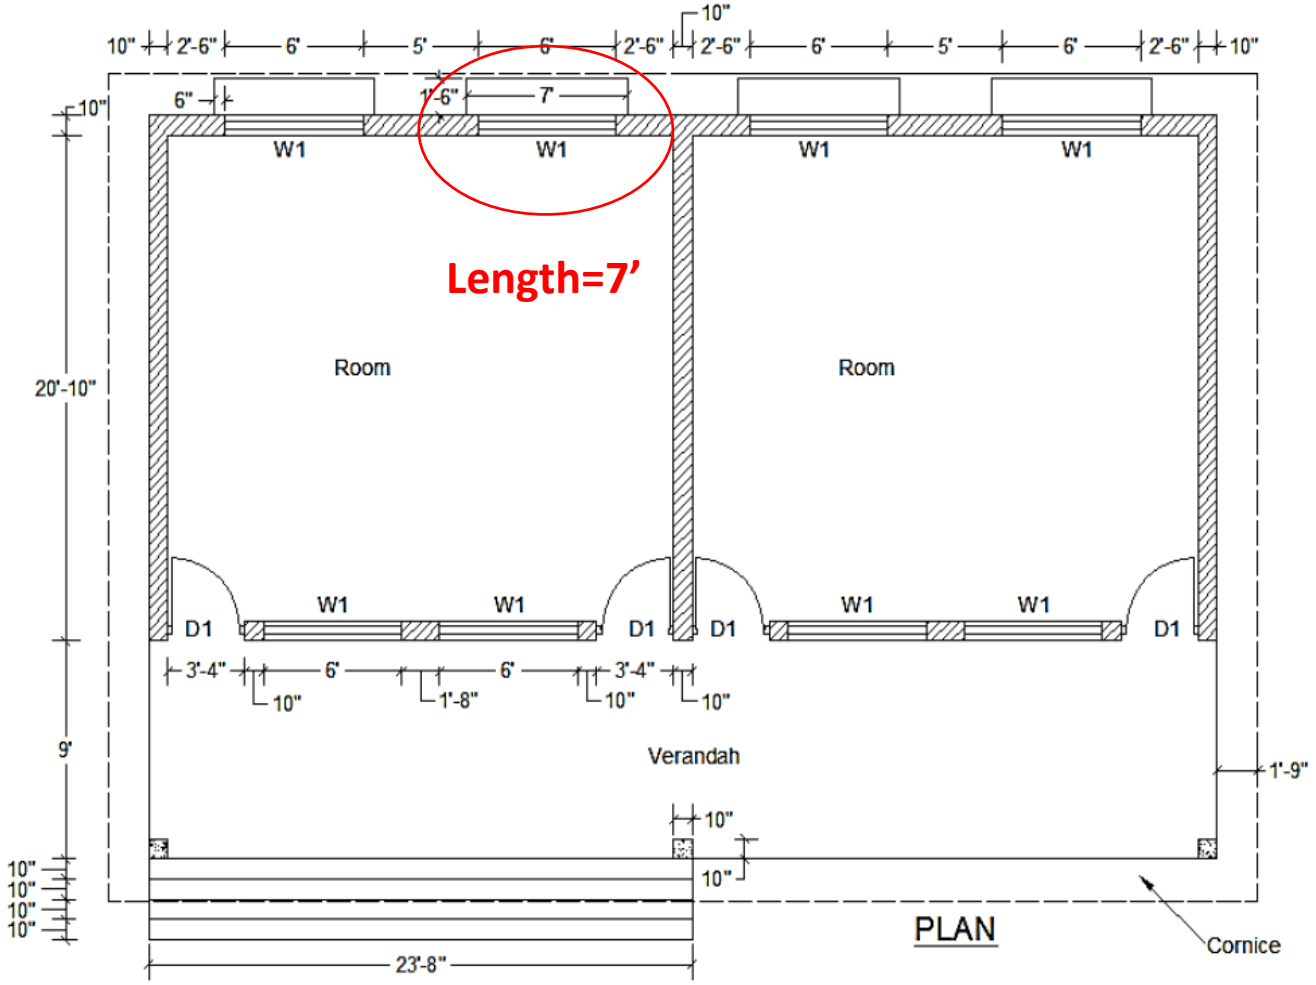

23. RCC in Sunshades

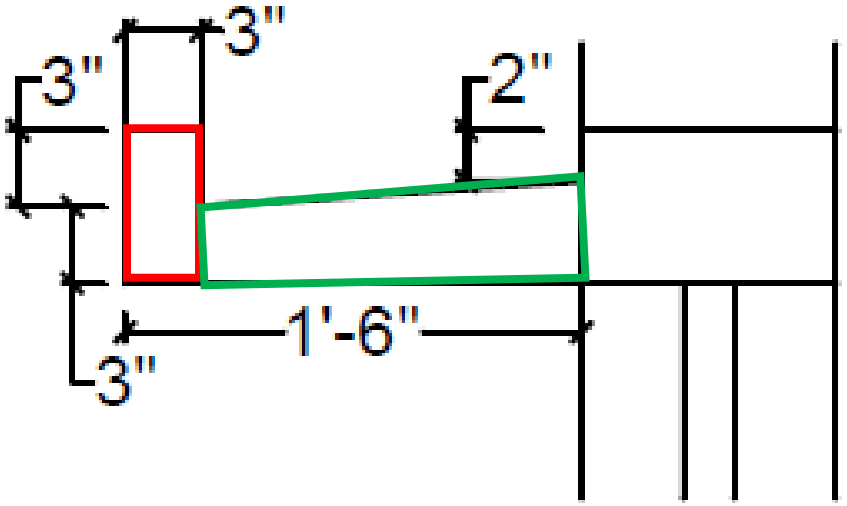

Volume= 4*((3”x6”) + (0.5x (3”+4”) x15”)) x7’