



Specifications

- Input voltage: 2–12 VDC
- Maximum load: 2 A
- Off-state current: < 1 µA (typ.)
- Control input: 0–VIN
- Logic: Active HIGH
- PCB size: 10.7 × 11.2 mm
- Pin pitch: 2.54 mm

Features

- High-side P-channel MOSFET switching
- MCU-controlled soft power latch
- Input and output status LEDs
- Breadboard compatible
- Open-source hardware

BOM				
Reference	Qty	Value	Package	Description
D1,D2	2	Red	0603	Status LED
J1	1	1x4 Header	2.54 mm	Pin header
Q1	1	A03400A	SOT-23	P-channel MOSFET
Q2	1	A03401A	SOT-23	N-channel MOSFET
R1	1	4.7 kΩ	0402	Gate series resistor
R2	1	100 kΩ	0603	Gate pull-down resistor
R3	1	47 kΩ	0402	Gate series resistor
R4	1	15 kΩ	0402	Input LED resistor
R5	1	10 kΩ	0402	Output LED resistor

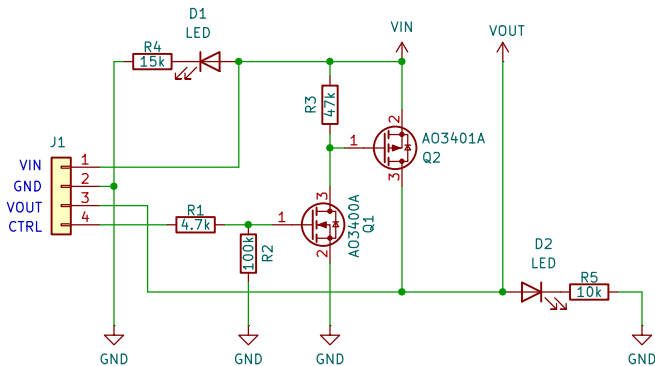

SBK_SP1 – Soft Power Switch

Licensed under CERN-OHL-P-2.0

Smarts Builds & Kits

Sheet: /

File: SBK_SP1 v1.0.kicad_sch

Title: **SBK_SP1 – Soft Power Switch**

Size: USLetter Date: 2026-07-30

KiCad E.D.A. 10.0.3

Rev: v1.0

Id: 1/1