
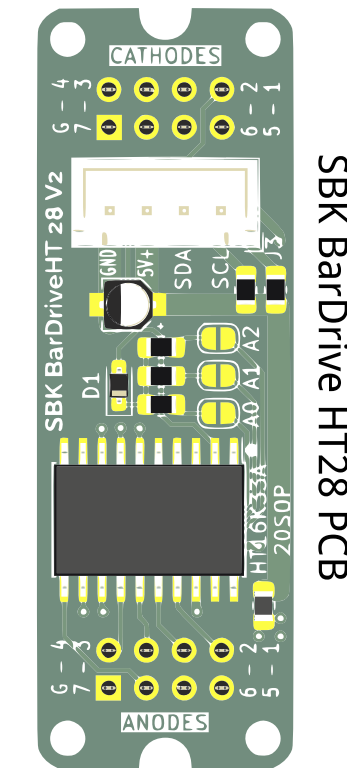


*** WIRES COLORS ARE FOR REFERENCE ONLY ***
YOUR WIRES/JUMPERS MAY HAVE DIFFERENT COLORS
AND/OR DIFFERENT COLORS ORDER. IT IS MORE
IMPORTANT TO RESPECT THE 2 POINTS CONNECTED :
GND TO GND, 5V+ TO 5V+, SIGNAL TO SIGNAL, ETC.

The diagram illustrates three different PCB options for the SBK BarMeter, arranged horizontally. Each PCB is labeled with its name and the number of segments (28). The top PCB is the 'SBK BarDrive MAX28 PCB', which features a large black integrated circuit (MAX28) and a 'DATA IN' port. The middle PCB is the 'SBK BarMeter SK28 PCB', and the bottom PCB is the 'SBK BarMeter SA28 PCB'. Both the middle and bottom PCBs have a 'COMMON ANODE' configuration. The diagram also shows the 'CATHODES' and 'ANODES' connections for each segment. The 'SBK BarDrive MAX28 PCB' has a 'DATA IN' port and a 'DATA OUT' port. The 'SBK BarMeter SK28 PCB' and 'SBK BarMeter SA28 PCB' have a 'COMMON ANODE' connection. The diagram includes labels for the pins of each PCB, such as 'C1-G6', 'C1-G5', 'L1-x', 'L2-x', 'L3-x', 'L4-G', 'C3-C7', 'C4-G', 'C5-G', 'C6-G', 'C7-G', 'C8-G', 'C9-G', 'C10-G', 'C11-G', 'C12-G', 'C13-G', 'C14-G', 'C15-G', 'C16-G', 'C17-G', 'C18-G', 'C19-G', 'C20-G', 'C21-G', 'C22-G', 'C23-G', 'C24-G', 'C25-G', 'C26-G', 'C27-G', 'C28-G', 'C29-G', 'C30-G', 'C31-G', 'C32-G', 'C33-G', 'C34-G', 'C35-G', 'C36-G', 'C37-G', 'C38-G', 'C39-G', 'C40-G', 'C41-G', 'C42-G', 'C43-G', 'C44-G', 'C45-G', 'C46-G', 'C47-G', 'C48-G', 'C49-G', 'C50-G', 'C51-G', 'C52-G', 'C53-G', 'C54-G', 'C55-G', 'C56-G', 'C57-G', 'C58-G', 'C59-G', 'C60-G', 'C61-G', 'C62-G', 'C63-G', 'C64-G', 'C65-G', 'C66-G', 'C67-G', 'C68-G', 'C69-G', 'C70-G', 'C71-G', 'C72-G', 'C73-G', 'C74-G', 'C75-G', 'C76-G', 'C77-G', 'C78-G', 'C79-G', 'C80-G', 'C81-G', 'C82-G', 'C83-G', 'C84-G', 'C85-G', 'C86-G', 'C87-G', 'C88-G', 'C89-G', 'C90-G', 'C91-G', 'C92-G', 'C93-G', 'C94-G', 'C95-G', 'C96-G', 'C97-G', 'C98-G', 'C99-G', 'C100-G'.

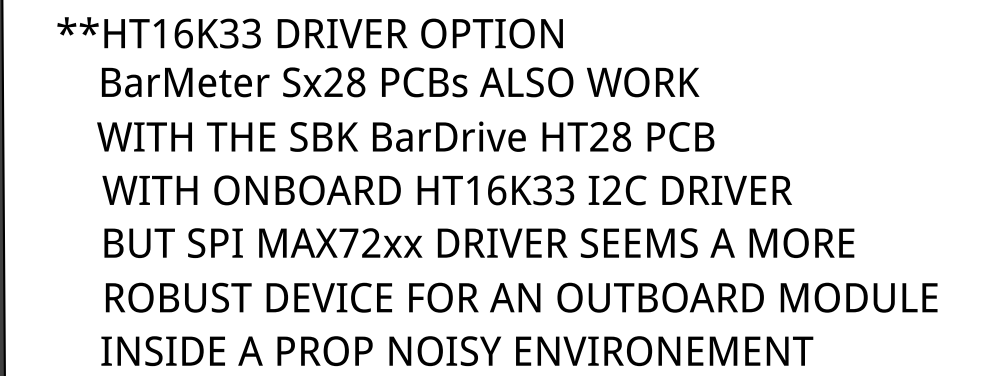

THERE ARE FIRMWARE OPTIONS FOR BOTH DRIVERS

ABOUT ADRESSABLE LEDS WIRING, RESPECT :
OUT TO IN, VCC(V+) TO VCC(V+) AND GND TO GND.
BEWARE THAT YOUR PIXELS AND JEWELS MIGHT HAVE
DIFFERENT PADS ORDERS AND LOCATIONS THAT
THOSE SHOWN IN THIS SCHEMATIC.

6-14V RANGE INPUT
RECOMMENDED :
7V INPUT MINIMUM LIKE
6 CELLS NiMH (7.2V),
PROTECTED 2 CELLS LiPo PACK (7.4V)
OR 12V TALENT CELL