
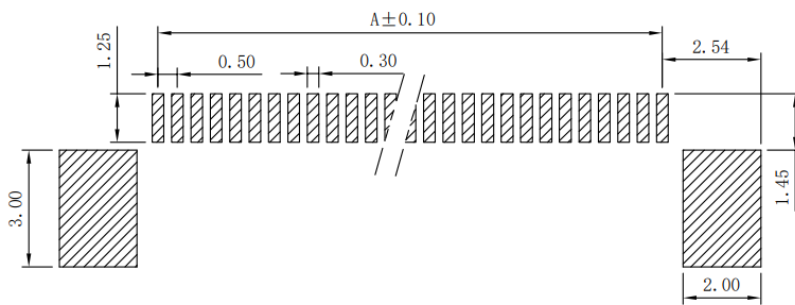


Rated current: 0.4A  
Rated voltage: 50V  
Withstanding voltage: 200V  
Contact resistance: 20mΩ  
Insulation resistance: 500MΩ  
Working temperature: -20°C ~ +85°C  
Plastic parts (material): LCP, UL94V-0  
Lock (material): LCP, UL94V-0  
Insert Spring (Material): Phosphor Bronze, Tin/Gold Plating  
Solder tab (material): Phosphor bronze, tin/gold plating

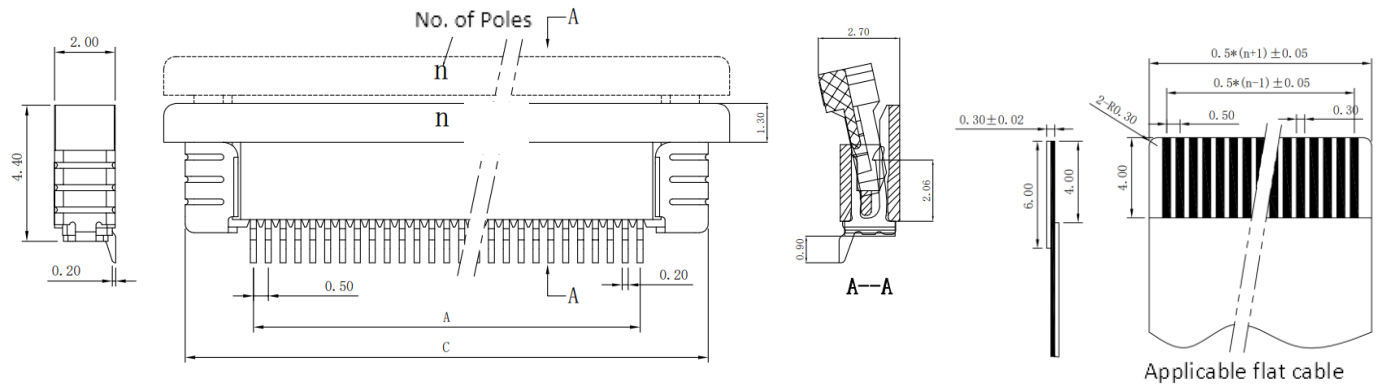

## PCB Layout

-TOLERANCES- UNLESS OTHERWISE SPECIFIED (Tolerance parameter table)		TITLE: 0.5mm FPC (A type) connected	
X.X ±0.30	X.X* ±3°	SCALE	UNIT
X.XX ±0.20	X.XX* ±2°		
X.XXX ±0.10	X.XXX* ±1°	1:1	mm