
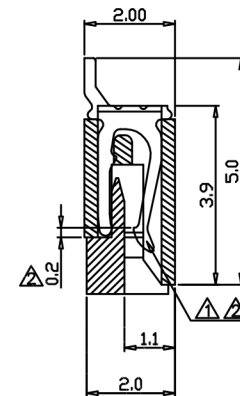
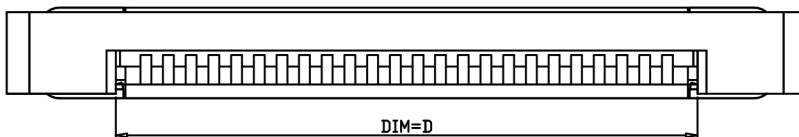
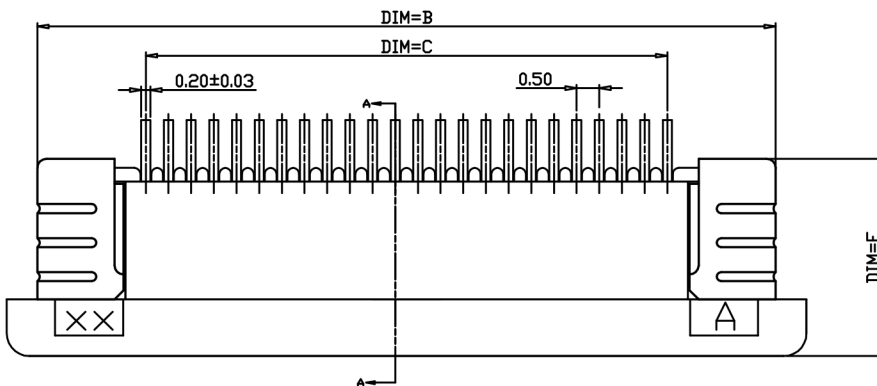


Electrical Characteristics:
 Current rating: 0.4A AC/DC
 Voltage rating: 50V AC/DC
 Temperature range: -25°C~+85°C
 Withstand Voltage: 200V AC/Minute
 Contact Resistance: $\leq 20m\Omega$
 Insulation resistance: $\geq 500m\Omega$
 Relative Humidity: 93%+40°C

Material Description:

Terminal: Phosphor Bronze Tin-Leadplated
 Fitting Nail: Brass Tin-plated
 Housing: Thermoplastic(UL94V-0)
 Slider: Thermoplastic(UL94V-0)

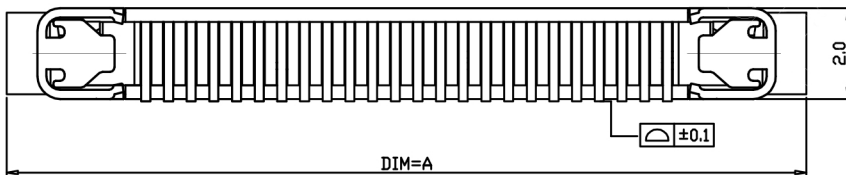

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
X.X	±0.15
X.XX	±0.05
X.XXX	
ANG.	±0°30'
UNIT	MM