STARZ ELECTRONICS

F101 — SLOT / END MACHINING DETAILS · R6 · SHEET2/2

ENGINEERING DRAWING — RELEASE HOLD

Units mm · A3 · Do not scale dimensions

POCKET TOOL SECTION Z6.20 / 5:1 · S increases right

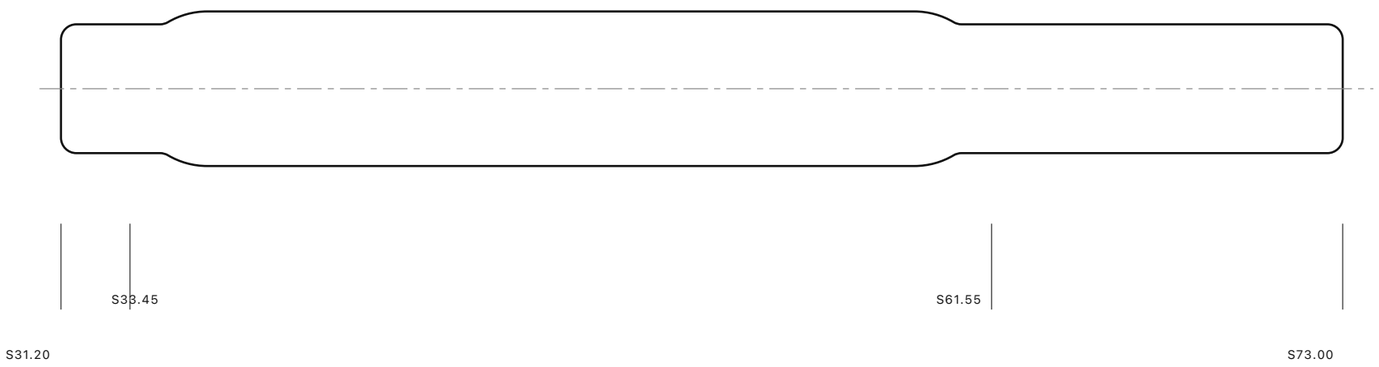

Near/far intersection coordinates are REF;nominal key circles R2.52,centres S35.97/59.03.

MB2 slot: W4.20±0.05

Start S31.20±0.02;end S73.00±0.02

Four plan corners R0.50±0.02

Four vertical key intersections R0.50±0.02

All slot floor/lip blends R0.15±0.02

Floor Z5.50±0.05;key floor Z4.00±0.02

Do not round the key's straight load flanks

End0.00–0.04 before actual Ø15 seat start

Fit MB2 before the pulley key

Rear entry is interrupted by the Ø12 land

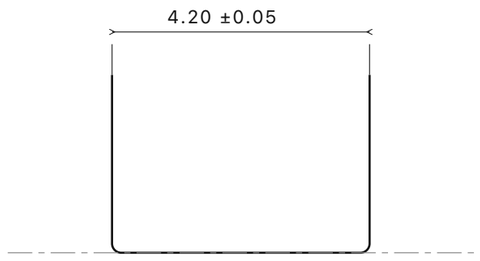

S70 LOCAL FLOOR SECTION / 10:1

Z5.50±0.05 · R0.15±0.02 both roots

END / THREAD / FINISH REQUIREMENTS

S0 and S113 external edges: 0.20±0.02×45°.

M15 lead at S64.50: 0.50±0.02×45°;full profile S65.10–71.30.

M5 entry: C0.20±0.02,independent of the external end chamfer.

Final slot/key machining precedes matched journal finishing.

Remove raised lips;edge break0.05–0.10 on remaining slot openings.

Do not touch bearing-seat lands or dimensional key load flanks.

INSPECT: optical profile/replica of slot roots and intersections;slot start/end/width/depth;end chamfers;thread GO/NO-GO and full depth.

SECTION AUDIT:191 nominal B-rep sections compared against the reduced beam I;this does not resolve local peak stress or fatigue.

Angular C:pulley-key radial midplane,+Z toward opening. Roller key180°±0.10°;MB2 slot median offset≤0.025 to C.

RELEASE HOLD: local stress/contact,joint preload and operating thermal field. No machining or physical inspection result is prefilled.

PART F101 · FEED ROTOR · DETAIL SHEET

S1-B-FEED-R6-2026-09-12

SCALES5:1 /10:1 · SHEET2 OF2

All unspecified axial coordinates ±0.02 · do not scale