STARZ ELECTRONICS

P002 — PAYOFF SPINDLE / R2 · SELECTED DESIGN,NOT FABRICATED

ENGINEERING DRAWING — RELEASE HOLD

Units mm · A3 · Do not scale dimensions

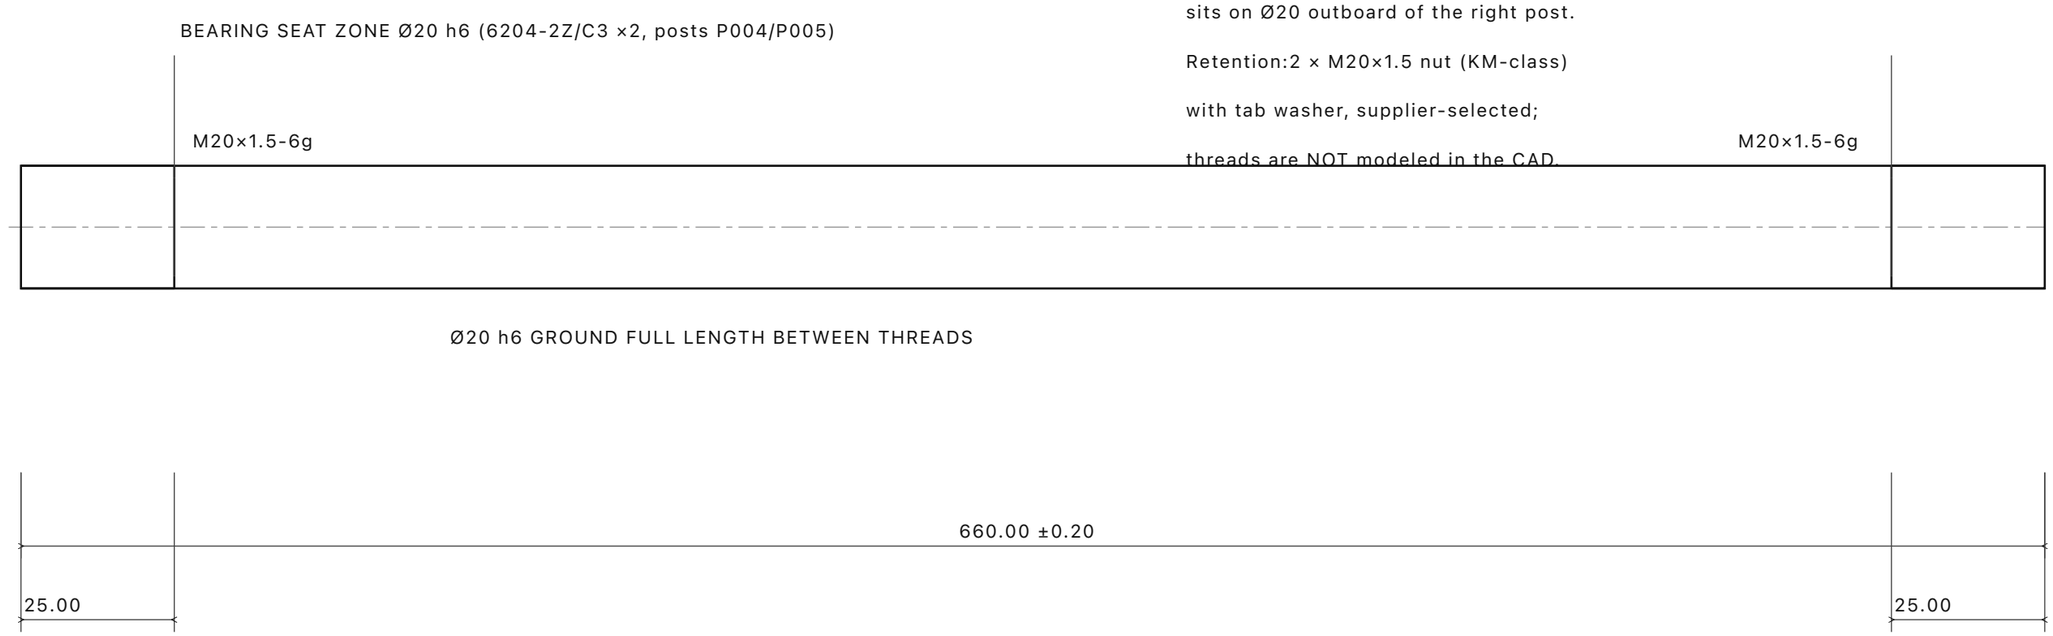

Material C45 (EN 1.0503),ground stock

Surface finish Ra0.8 on Ø20, Ra1.6 elsewhere

Both ends chamfer C0.5;no centre hole specified

Hardness: as-supplied;no heat treatment

Interface: spool P001 rides on Ø20 through

two Ø20.5 flange bores;brake disc P006

sits on Ø20 outboard of the right post.

Retention:2 × M20×1.5 nut (KM-class)

with tab washer, supplier-selected;

threads are NOT modeled in the CAD.

DATUM A = SPINDLE AXIS, radial runout ≤0.010 between seats;cylindricity ≤0.004 on seats

DATUM B = left seat centreline at Y=−279.5 (machine coords);seats spanY=−289…−271 andY=+271…+289

PROCESS: centreless-grind Ø20 h6;single-point the M20×1.5 ends from the ground diameter,deburr.

INSPECT: length660;Ø20 actual within h6;seat runout/cylindricity;thread gauging;visual for grinding burns.

ASSEMBLY: fit 6204 bearings into P004/P005 pockets;insert spindle through spool bores and bearings;

clamp P006 and nut M20×1.5 outboard. Match-mark bearing-to-post and nut-to-shaft after first fit.

PART P002 · PAYOFF SPINDLE

S1-B-MECH-R3-2026-09-13

SCALE1:2 / SINGLE SELECTED DIMENSION RECORD

RELEASE HOLD: load validation (docs/26 §4/§6);not fabricated