Urethane Rollers with Shafts


Straight / Both Ends Threaded

■Straight



Type	Material		Hardness
	Shaft	Lining	
USH	EN 1.3505 Equiv. Induction Hardened (Depth 0.8~2mm) 58HRC~	Urethane (Natural Color)	Shore A90
USM			Shore A70
USL			Shore A50

※Urethane is baked on the outer circumference of the core material.

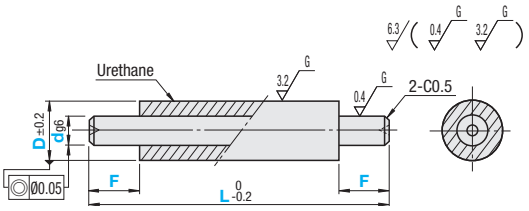

Part Number Type	D	dg6 Selection	L 1mm Increment	F 1mm Increment
USH USM USL	10	5 6	50~100	5≤F≤dx2 Fx2<L
	15	6 8 10	50~150	
	20	8 10 12 15	50~200	
	25	10 12 15 20		
	30	15 20	50~300	
	35	15 20		

Ordering Example

Part Number	-	d	-	L	-	F
USH20	-	8	-	150	-	F10

Part Number Type	D	Unit Price L50~100	L101~150	L151~200	L201~250	L251~300
USH	10		-	-	-	-
	15			-	-	-
	20				-	-
	25				-	-
	30					
	35					


Part Number Type	D	Unit Price L50~100	L101~150	L151~200	L201~250	L251~300
USM USL	10		-	-	-	-
	15			-	-	-
	20				-	-
	25				-	-
	30					
	35					

■Both Ends Threaded



Type	Material		Hardness
	Shaft	Lining	
USMH	EN 1.1191 Equiv.	Urethane (Natural Color)	Shore A90
USMM			Shore A70
USML			Shore A50

※Urethane is baked on the outer circumference of the core material.

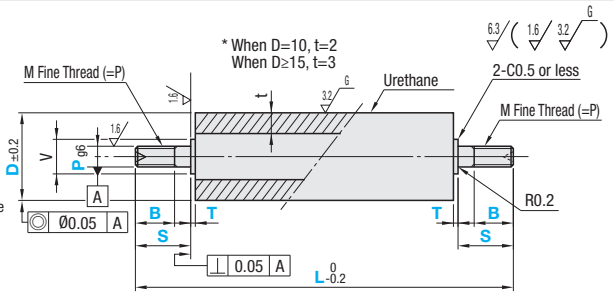

Part Number Type	D	L 1mm Increment	Pg6 Selection	1mm Increment S	B	T
USMH USMM USML	10	50~100	3	3≤S≤Px5	B=0 or (When P≤6) B≤S-2 (When P=8 or 10) B≤S-3 (When P≥12) B≤S-5	1~30
	15	50~150	3 4 5 6			
	20	50~200	4 5 6 8 10			
	25		4 5 6 8 10 12			
	30	50~300	5 6 8 10 12 15 17			
	35		8 10 12 15 17 20			

Ordering Example

Part Number	-	L	-	P	-	S	-	B	-	T
USMH20	-	180	-	P10	-	S30	-	B25	-	T1

V and M are as the list below based on P dim.


P	V	M (Fine)
3	5	M 3xP0.35
4	6	M 4xP0.5
5	7	M 5xP0.5
6	8	M 6xP0.75
8	10	M 8xP1.0
10	13	M10xP1.0
12	15	M12xP1.0
15	17	M15xP1.0
17	20	M17xP1.0
20	24	M20xP1.0

Part Number Type	D	Unit Price L50~100	L101~150	L151~200	L201~250	L251~300
USMH	10		-	-	-	-
	15			-	-	-
	20				-	-
	25				-	-
	30					
	35					

Part Number Type	D	Unit Price L50~100	L101~150	L151~200	L201~250	L251~300
USMM USML	10		-	-	-	-
	15			-	-	-
	20				-	-
	25				-	-
	30					
	35					

Alterations

Part Number	-	d	-	L	-	F	-	P	-	S	-	B	-	T	-	(DKC, UDC)
USH15 USMH20	-	8	-	80 120	-	F5	-	P8	-	S8	-	B5	-	T4	-	DKC UDC

Alteration	Code	Spec.
O.D. Tolerance 	DKC	D dimension tolerance is changed. d Tolerance +0.05 0 Ordering Code DKC

Alteration	Code	Spec.
Change to Antistatic Urethane (Urethane Color: Gray)	UDC	Only USH and USMH are antistatic Change to Urethane Ordering Code UDC Specific Volume Resistivity 2.1 x 10^8Ω·cm Surface Resistivity 4.0x10^9 Ω (Temperature 30°C / Humidity 60%)