STARZ ELECTRONICS

H005/H006 — CUSTOM CUT-AXIS PLATES / R1

H005 BASE PLATE 6082-T6: 86 x 440 x 20;two HGR20 rail seats
milled flat 0.02/300,60 mm pitch M5;BK12 land at the fixed end,
BF12 land at the distal end;6x Ø6.6 base grid 46/100 to H001/H002.
Deburr;no hard anodise on the rail seats.

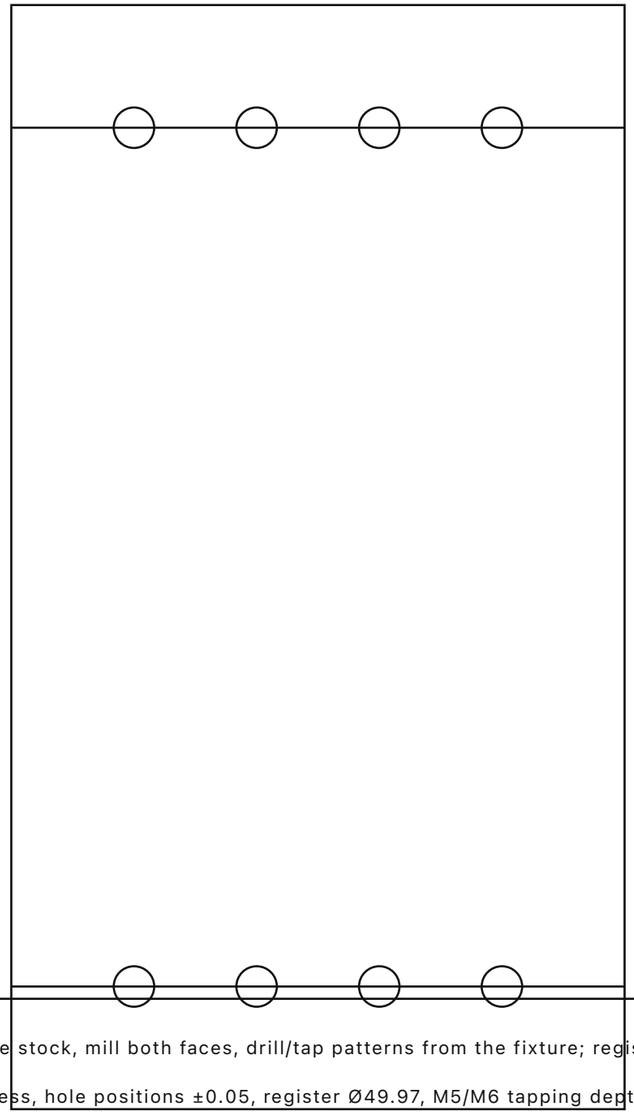

ENGINEERING DRAWING — RELEASE HOLD

Units mm · A3 · Do not scale dimensions

H006 CARRIAGE PLATE 6082-T6: pad 60x75 at 46 mm height;
Ø49.97 F0 register, 4x M5 on PCD70, 4x M6 on 46x46;
DSG16h nut pocket on the underside; 4x HGH20CA lands.
Top face flat 0.02; F0 register perpendicular 0.02.

Contract: reproduce the KK86 carriage interface exactly
(docs/39 §2) so H003 and the adapter FEM stay valid.
Screw end Ø8 h7 x18 exposed; Ø46 service cavity.

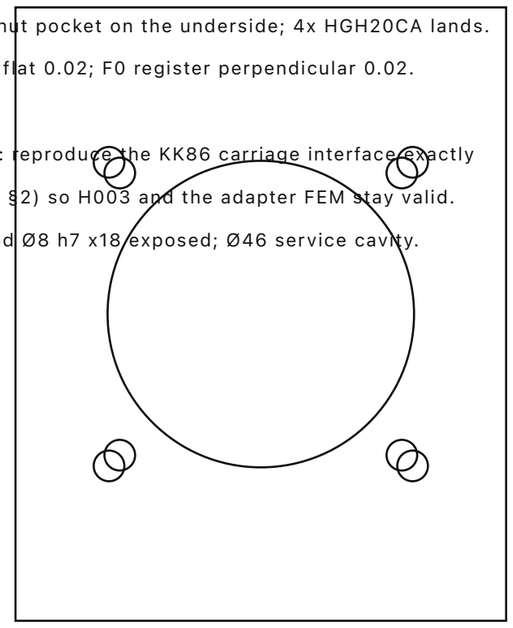

PROCESS: plate stock, mill both faces, drill/tap patterns from the fixture; register bore in the same setup.

INSPECT: flatness, hole positions ±0.05, register Ø49.97, M5/M6 tapping depth, nut-pocket depth.

ASSEMBLY: rails to H005, blocks to H006, nut housing in pocket, screw through BK12/BF12; run-in 1 h;
re-measure preload and repeatability ±0.02 over 194 mm (DTI); record in the build record.

PARTS H005 · H006 · CUSTOM CUT AXIS (docs/39)

S1-B-MECH-R4-2026-09-16

DIMENSION RECORD

RELEASE HOLD: physical run-in and repeatability record