STARZ ELECTRONICS

M201 — MEASURING ENCODER PLATE / R2

ENGINEERING DRAWING — RELEASE HOLD

Units mm · A3 · Do not scale dimensions

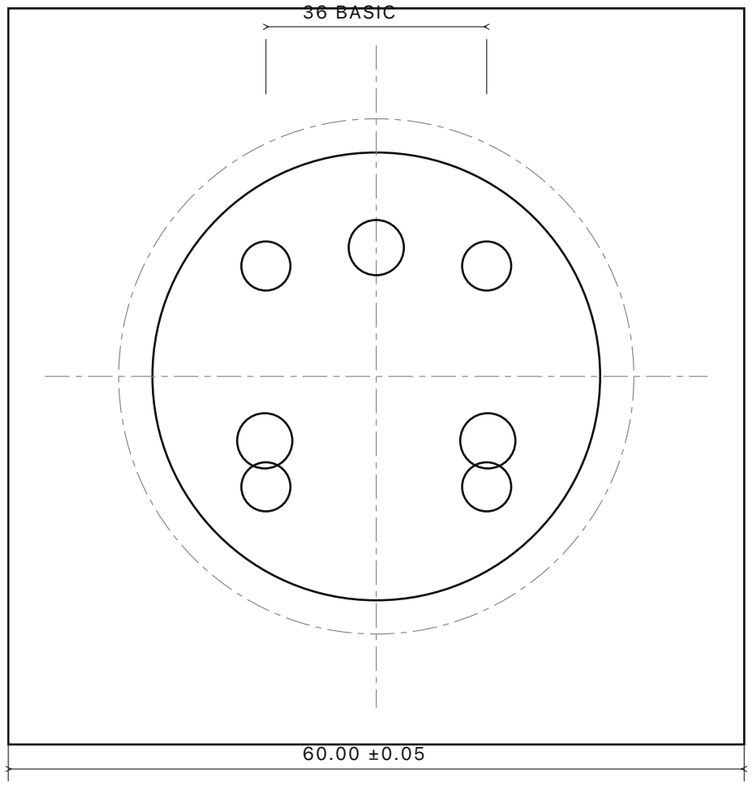

VIEW FROM COUPLING SIDE / 2:1

AXIAL SECTION / 2:1

3 × Ø4.50 +0.10/0 THRU;PCD42 BASIC;120° apart;one hole on+Z.

4 × M4×0.7 TAP THRU at(±18,±18);36×36 BASIC;plate support screws from coupling side.

Central seat bore Ø36.50 +0.05/0 THRU;Ø36.5-class synchro-flange seat;no shoulder.

All hole positions Ø0.10 to A|B|C. Hole coordinates below are BASIC.

DATUM A: encoder mounting face Y0

DATUM B: central bore axis

DATUM C: left edge X−30 in this view

A flatness0.02;opposite face parallel0.02

B perpendicularity0.02 to A

B cylindricity0.01;seat bore Ra0.8µm

Joint faces Ra1.6µm;other faces Ra3.2µm

Material EN AW-6082-T6;no coating on A/B

Stock66×66×8;quantity2;edgesC0.20±0.05

Encoder holes (X,Z),PCD42 BASIC:

(0,+21), (+18.1865,−10.5)

(−18.1865,−10.5)

3 ×ISO4762 M4×12,class8.8

Nominal flange engagement6.0

(ifm M4×0.7 thread depth6)

4 ×ISO4762 M4×6,class8.8 support screws

Heads in M203 rear counterbores Ø7.5×4

Encoder ifm RU3100: body Ø58.6×63.5

Shaft Ø6×10;tip10 from A;no flat

Flange 3×M4×0.7×6 on PCD42;no pilot

on the archived drawing — confirm centering

M12 5-pole radial connector;orient +X

Final mounting torque/support still open

PROCESS: square stock;finish A/opposite face;finish seat bore;drill3PCD holes;tap4M4 support holes;deburr without dishing A.

INSPECT:60square;6thickness;seat bore diameter/cylindricity;face flatness/parallelism;hole positions and clearance diameters;M4 tap engagement.

ASSEMBLY: encoder flange face on A;shaft passes the seat bore;M4×12 screws from the coupling side into the flange;support screws into the M203 counterbores.

SCOPE: five-part encoder face mount only. Pressure arm,shaft bearings,complete tool access and wire guides are not this drawing.

PART M201 · MEASURING ENCODER PLATE

S1-B-MEAS-R2-2026-09-16

SCALE2:1 / SINGLE SELECTED DIMENSION RECORD

SOURCE: ifm RU3100 datasheet;STARZ measurement_spec