


Based on Bob Sherwood's article from April 1979 Ham Radio Magazine

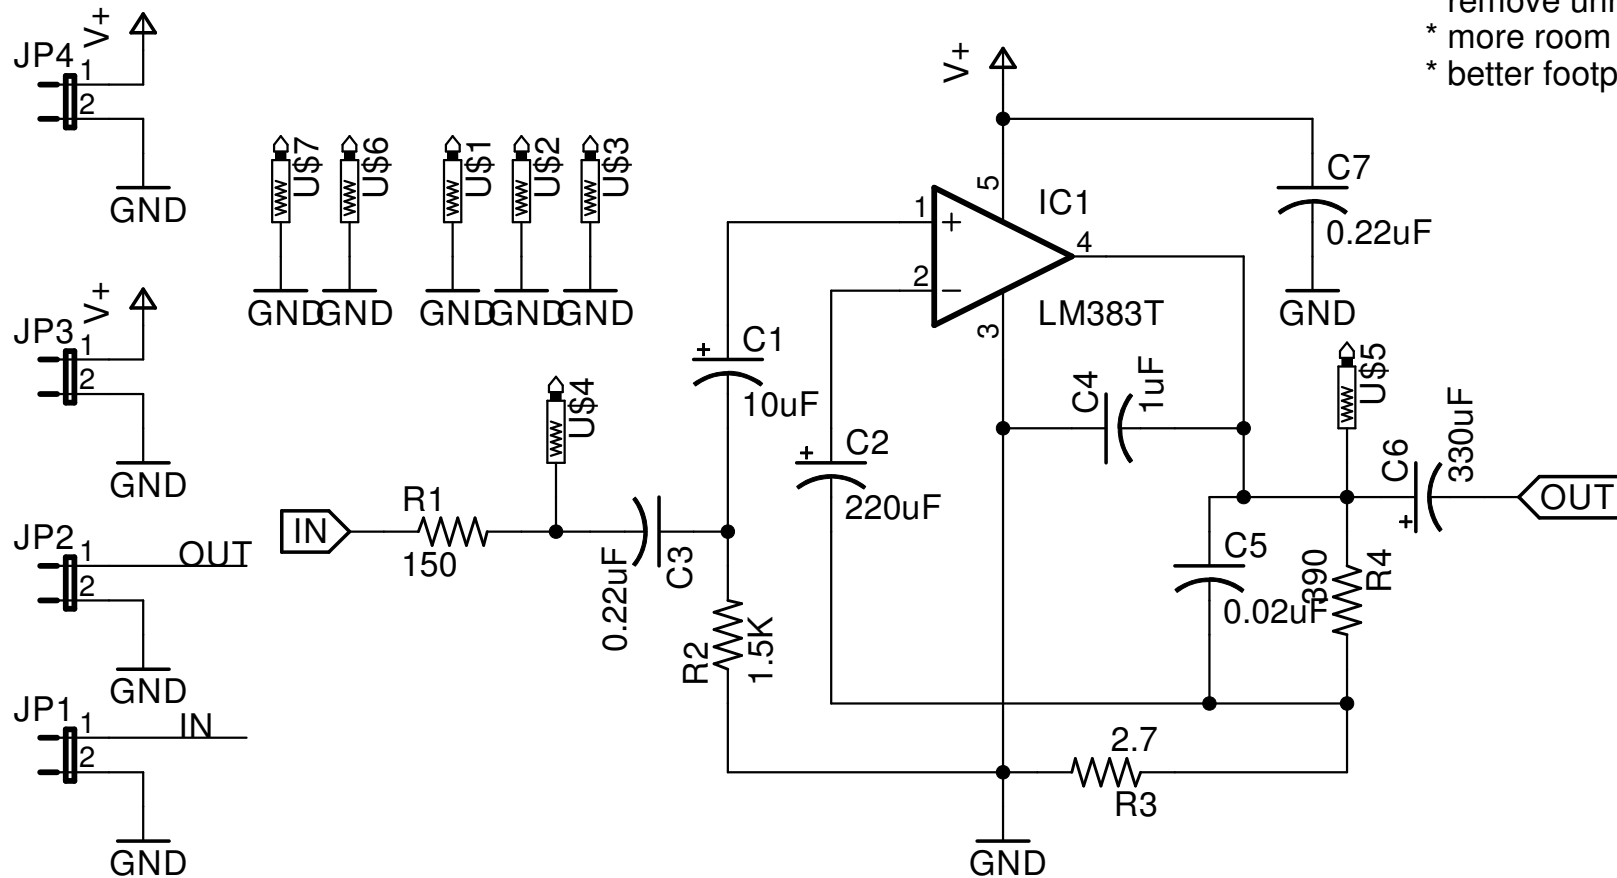

FIXME:

- \* pad under amp
- \* jumper to short the mounting holes
- \* 330uF pads a little tight
- \* remove unnecessary holes
- \* more room on resistor footprints
- \* better footprint for connectors