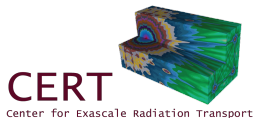# A High-Order Low-Order Algorithm with Exponentially-Convergent Monte Carlo for Thermal Radiative Transfer

Simon Bolding, Matt Cleveland, and Jim Morel

4 August 2016

Nuclear Energy University Programs

U.S. Department of Energy

CERT
Center for Exascale Radiation Transport

We are interested in modeling thermal radiation transport in the high energy density physics regime

Modeling materials under extreme conditions
Temperatures $\mathcal{O}(10^6)$ K or more

Photon radiation transports through a material
Significant energy may be exchanged

We want to improve efficiency of Monte Carlo calculations
e.g., inertial confinement fusion, supernovae, et. al.

Our method has been applied to a simplified model: the 1D frequency-integrated radiative transfer equations

Energy balance equations for radiation and material.
Radiation intensity $I(x, \mu, t)$, material temperature $T(x, t)$

$$\frac{1}{c}\frac{\partial I}{\partial t} + \mu\frac{\partial I}{\partial x} + \sigma_t I(x, \mu, t) = \frac{1}{4\pi}\sigma_a a c T^4,$$

$$C_v \frac{\partial T(x, t)}{\partial t} = \sigma_a \phi(x, t) - \sigma_a a c T^4$$

Equations are nonlinear and may be tightly coupled
Absorption opacity (σ_a) can be a strong function of T

Implicit Monte Carlo (IMC) is the standard Monte Carlo transport method for TRT problems

The system is *linearized* over a time step $t \in [t^n, t^{n+1}]$
Opacities are evaluated with $T(t^n)$

- Produces a linear MC transport problem
  with effective emission and scattering terms

- Emission source is **not** fully implicit.
  Monte Carlo integration over Δt for intensity

We developed a high-order low-order (HOLO) method that improves on several drawbacks of IMC

Standard IMC	HOLO Method
Large statistical noise possible	ECMC is very statistically efficient for TRT problems
Effective scattering can make MC very expensive	MC solution has no scattering
Linearization can cause non-physical results (maximum principle violations)	Fully implicit time-discretization and LO solution resolves nonlinearities
Reconstruction of linear emission shape limits artificial energy propagation	Linear-discontinuous FE for $T(x)$ preserving equilibrium diffusion limit

A HOLO Algorithm for Thermal Radiative Transfer

Overview of algorithm

Derivation of the LO equations

Exponentially Convergent MC High-Order Solver

Computational Results

Extensions and Improvements on HOLO algorithm

A HOLO Algorithm for Thermal Radiative Transfer

Overview of algorithm

Derivation of the LO equations

Exponentially Convergent MC High-Order Solver

Computational Results

Extensions and Improvements on HOLO algorithm

Basic idea is a nonlinear low-order system with high-order angular correction from Monte Carlo transport solves

The **LO system** is space-angle moment equations,
on a fixed finite-element (FE) spatial mesh

- Reduced dimensionality in angle
  allows for solution with Newton's method

- **Output:** linear-discontinuous $\phi(x)$ and $T(x)$
  Construct LDFE scattering and emission source

The **HO system** is a pure-absorber transport problem
- Solved with exponentially-convergent MC (ECMC)
  for *efficient* reduction of statistical noise

- **Output:** consistency terms

Iterations between the HO and LO systems can be performed each time step
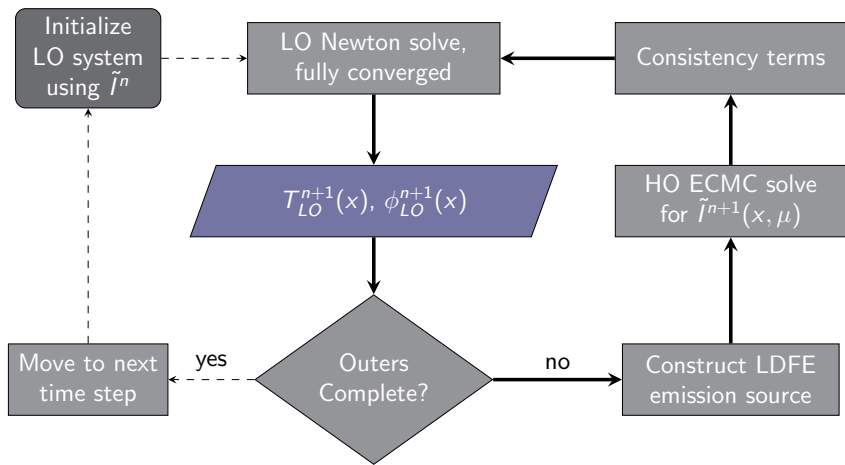
Flow chart with the following elements:

- Initialize LO system using $\tilde{I}^n$
- LO Newton solve, fully converged
- Consistency terms
- $T_{LO}^{n+1}(x)$, $\phi_{LO}^{n+1}(x)$
- HO ECMC solve for $\tilde{I}^{n+1}(x, \mu)$
- Move to next time step
- Outers Complete?
- yes
- no
- Construct LDFE emission source

A HOLO Algorithm for Thermal Radiative Transfer

Overview of algorithm

Derivation of the LO equations

Exponentially Convergent MC High-Order Solver

Computational Results

Extensions and Improvements on HOLO algorithm

The LO equations are formed as *consistently* as possible with spatial and angular moments of TRT equations

The time discretization is backward Euler
for both the HO and LO equations

Spatial moments are weighted with FE basis functions:
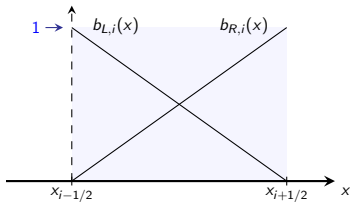
$$\langle\cdot\rangle_{L,i} = \frac{2}{h_i}\int_{x_{i-1/2}}^{x_{i+1/2}} b_{L,i}(x)(\cdot)\mathrm{d}x$$

Half-range integrals reduce angular dimensionality

$$I^+(x) = 2\pi\int_0^1 I(x,\mu)\mathrm{d}\mu$$

Apply moments to the TRT equations and manipulate to form angular consistency terms

For example, apply $\langle \cdot \rangle_{L,i}^{+}$ to a streaming term:

$$
\left\langle \mu \frac{\partial I}{\partial x} \right\rangle_{L}^{+} = -\frac{2}{h_i} \{\mu I\}_{i-1/2}^{+} + \frac{1}{h_i} \left[\langle \mu I \rangle_{L,i}^{+} + \langle \mu I \rangle_{R,i}^{+} \right]
$$

$$
= -\frac{2}{h_i} \frac{\{\mu I\}_{i-1/2}^{+}}{I_{i-1/2}^{+}} I_{i-1/2}^{+} + \frac{1}{h_i} \frac{\langle \mu I \rangle_{L,i}^{+}}{\langle I \rangle_{L,i}^{+}} \langle I \rangle_{L,i}^{+} + \frac{1}{h_i} \frac{\langle \mu I \rangle_{R,i}^{+}}{\langle I \rangle_{R,i}^{+}} \langle I \rangle_{R,i}^{+}
$$

Apply moments to the TRT equations and manipulate to form angular consistency terms

For example, apply $\langle \cdot \rangle_{L,i}^+$ to a streaming term:

$$\left\langle \mu \frac{\partial I}{\partial x} \right\rangle_L^+ = -\frac{2}{h_i} \{\mu I\}_{i-1/2}^+ + \frac{1}{h_i} \left[\langle \mu I \rangle_{L,i}^+ + \langle \mu I \rangle_{R,i}^+ \right]$$

$$= -\frac{2}{h_i} \frac{\{\mu I\}_{i-1/2}^+}{I_{i-1/2}^+} I_{i-1/2}^+ + \frac{1}{h_i} \frac{\langle \mu I \rangle_{L,i}^+}{\langle I \rangle_{L,i}^+} \langle I \rangle_{L,i}^+ + \frac{1}{h_i} \frac{\langle \mu I \rangle_{R,i}^+}{\langle I \rangle_{R,i}^+} \langle I \rangle_{R,i}^+$$

Now, close the final moment equations:

- ► Approximate consistency terms with $\tilde{I}_{HO}^{n+1}$
  from previous HO solve
- ► Eliminate remaining face unknowns with LD spatial closure
  $T^4(x)$ and $T(x)$ also assumed LD

A HOLO Algorithm for Thermal Radiative Transfer

We use a projection $\tilde{I}(x, \mu)$ onto a space-angle LDFE mesh to represent the solution

local volumetric tallies

$$\tilde{I}_{ij}(x, \mu) = I_a + \frac{2}{h_x}I_x(x - x_i) + \frac{2}{h_\mu}I_\mu(\mu - \mu_i)$$

Each x-μ cell

(x_i, μ_j)
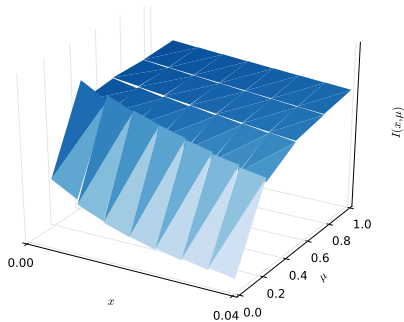
We apply the ECMC algorithm to
the pure-absorber HO transport equation

$$\left[\mu \frac{\partial}{\partial x} + \left(\sigma_t + \frac{1}{c \Delta t} \right) \right] I^{n+1} = \frac{1}{4\pi} \left[\sigma_a ac \left(T_{LO}^{n+1} \right)^4 + \sigma_s \phi_{LO}^{n+1} \right] + \frac{\tilde{I}^n}{c \Delta t}$$

$$\mathbf{L} I^{n+1} = q$$

For each batch m:

- Evaluate residual source: $r^{(m)} = q - \mathbf{L} \tilde{I}^{n+1,(m)}$

- Estimate $\epsilon^{(m)} = \mathbf{L}^{-1} r^{(m)}$ via MC simulation

- Update solution: $\tilde{I}^{n+1,(m+1)} = \tilde{I}^{n+1,(m)} + \tilde{\epsilon}^{(m)}$

I implemented straight-forward variance reduction
straight-forward variance reduction

$I^n(x, \mu)$ is often an **excellent** estimate of $I^{n+1}(x, \mu)$
No MC sampling from thermal equilibrium regions

Histories stream without collision
along path s, weight reduces as $w(s) = w_0 e^{-\sigma_t s}$

Use cell-wise systematic sampling for $|r^{(m)}|$ source
Particularly effective in thick cells

- Particles in each x-μ cell $\propto |r^{(m)}|$ in cell

- Set minimum n for cells
  except for cells in thermal equilibrium

A HOLO Algorithm for Thermal Radiative Transfer

We will test our method with several standard **Marshak Wave** problems

Results show radiation temperature $T_r = \sqrt[4]{\phi/ac}$

Implementation specifics for results are given below:

- ▶ HOLO method implemented as stand-alone C++ code
  IMC results from Jayenne (LANL code)

- ▶ Δt increases from 0.01 ns to 0.1 ns

- ▶ One HO solve per time step, with two LO solves
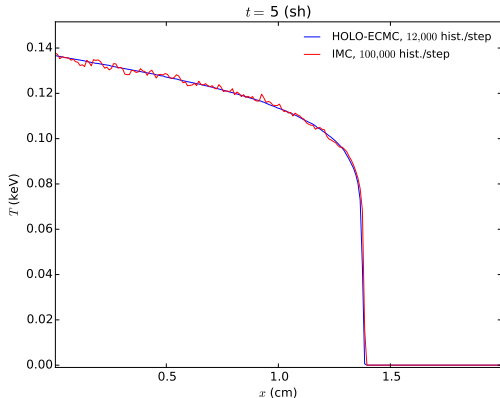   - ▶ *each HO* solve has 3 ECMC batches
      no adaptive mesh refinement

- ▶ Figure of Merit: $$\boxed{\text{FOM} = \frac{1}{\|\sigma^2\| N_{\text{total}}}}$$

  are normalized to IMC results

The HOLO method produces significantly less noise than IMC for a typical Marshak Wave: **FOM=145**

- $\sigma_a \propto T^{-3}$

- Transient solution after 5 shakes ($\sim$ 520 steps)
  200 x cells (and 4 μ cells for ECMC)

ECMC is more efficient than standard MC as a HO solver

- ▶ Left half is optically thin ($\sigma = 0.2$ cm^{-1}), right half is thick ($\sigma_a = 2000$ cm^{-1}). 8 μ cells

- ▶ Results for HOLO with different HO solvers: ECMC (FOM=10,000), standard MC (FOM=0.46), and an S$_2$ solution
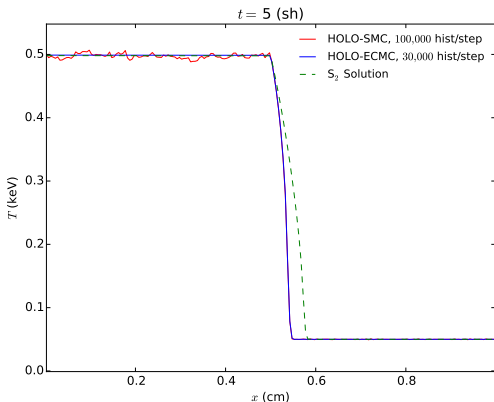
The LDFE discretization for the LO equations preserves the equilibrium diffusion limit

- Large, constant σ_a and small c_v
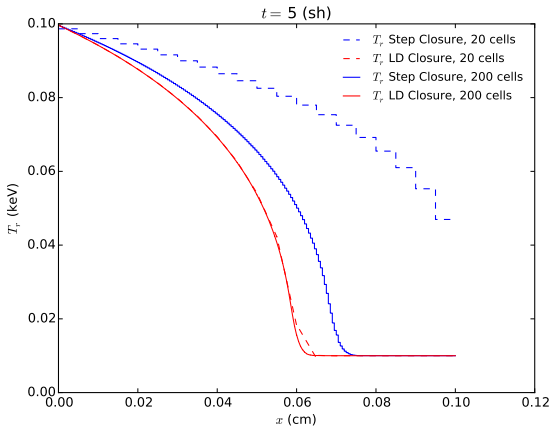
Our HOLO method preserves the maximum principle with sufficient nonlinear convergence

- **Material temperatures** plotted; all simulations end at $t = 0.1$ sh
  $\sigma_a \propto T^{-3}$, c_v small, $\Delta t \in [10^{-4}, 10^{-2}]$ sh

- LO Newton iterations required damping
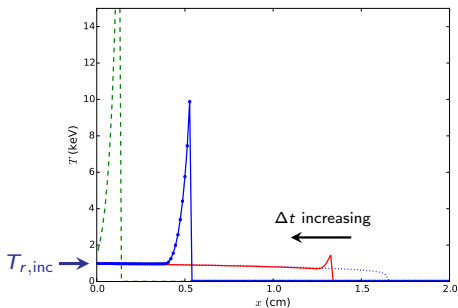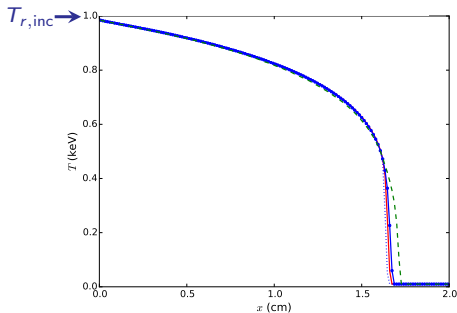
A HOLO Algorithm for Thermal Radiative Transfer

The time variable can be included in the ECMC trial space with a consistent LO closure

Include $\frac{1}{c}\frac{\partial}{\partial t}(\cdot)$ in transport operator **L**
with $T(x)$ still implicit

Sample and track in time
Tally time-average error projection and at t^{n+1}

In LO equations, parameterize ϕ_{LO}^{n+1}
in terms of **time-averaged** unknowns

$$\langle\phi\rangle_{L,i}^{n+1} = 2\,\gamma_{L,i}^{HO}\,\overline{\langle\phi\rangle}_{L,i} - \langle\phi\rangle_{L,i}^{n}$$

The time-closure parameters preserve MC time integration in the LO solution

- Material is near-void, so temperature uncouples
  take 3 large time steps and compare T_R^{n+1}

- 300,000 histories/step

T_R at end of time step
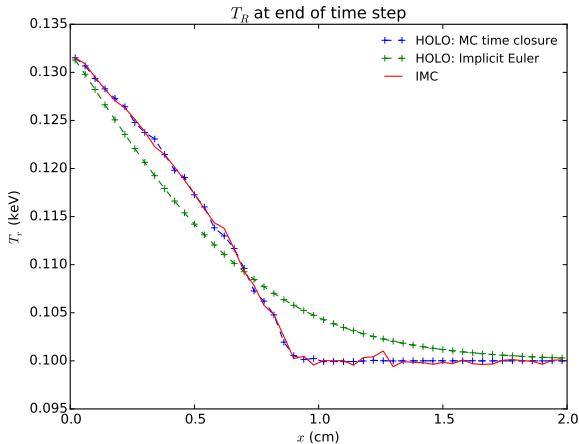
A few other topics are under investigation:

Resolving negative intensities in optically thick cells
using an artificial source with alternate trial space

Using HO solution to estimate spatial closure
by including face tallies in ECMC

Source iteration with diffusion synthetic acceleration
to solve the LO equations

A HOLO Algorithm for Thermal Radiative Transfer

ECMC is very efficient for TRT simulations
and fits well in global HOLO context

The LO system can resolve nonlinearities
with bounded angular consistency terms

Next step is to extend to higher spatial dimensions
main hurdle to overcome is infrastructure

A HOLO Algorithm for Thermal Radiative Transfer

For more details see:
S.R. Bolding, M. Cleveland, and J.E. Morel. A High-Order Low-Order Algorithm with Exponentially-Convergent Monte Carlo for Thermal Radiative Transfer. Nuclear Science & Engineering: M&C 2015 Special Issue, 2016. Accepted.
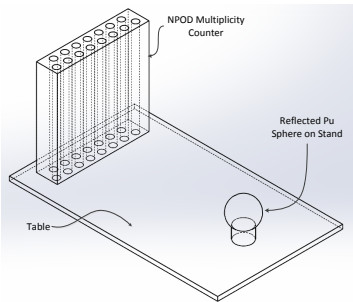
Simulations of Neutron Multiplicity Experiments with Perturbations to Nuclear Data

Simon Bolding and C.J. Solomon

4 August 2016

Multiplicity experiments were performed for validating subcritical simulations


*Not to scale

Experimental Parameters

- 94% ^{239}Pu sphere

- 5 reflector configurations
  None to 3.0 cm HDPE shells

Experiments repeated w/ ^{252}Cf

C.J. Solomon modeled experiments with modified MCNP5

MCNP5 simulated multiplicity distributions showed discrepancy with experiments for Pu, but not for ^{252}Cf

Pu with 3.0-cm HDPE reflector

Previous work by Mattingly [2010]

- Caused by ^{239}**Pu** nuclear data

- Decreased energy-integrated $\overline{\nu}$, $\overline{\nu}$: mean # of neutrons/fission

ENDF-**VII** raised $\overline{\nu}$ for ^{239}Pu to match k_{eff} benchmarks

- $\overline{\nu}$ is $\sim 2\,\sigma$ above measured data for $E < 1.5$ MeV

Can we reduce discrepancy in multiplicity distributions without significantly altering k_{eff} ?

Perform energy-dependent perturbations of $\overline{\nu}(E)$ in ^{239}Pu
Random samples drawn from ENDF-VII.1 covariance data

Compare experimental and simulated multiplicity dist.
and a k_{eff} benchmark (Jezebel)

Compare $\overline{\nu}(E)$ results to uniform shifts of microscopic cross sections

LANL Python verification library was modified heavily to generate energy-dependent $\overline{\nu}$ samples

1. Generate a correlated sample of $\overline{\nu}(E)$

   ▶ Assumed multivariate Gaussian
     with group-averaged covariances

2. Modify continuous $\overline{\nu}(E)$ data in **ACE** file

3. Perform all MCNP simulations
   with modified ACE data

A cost function provides a measure of inaccuracy for each data realization

Reduced χ^2 values for the 5 multiplicity experiments and criticality benchmark

$$\chi^2_{\text{red,mult},m} = \frac{1}{N_{bins} - 1} \sum_{i=1}^{N_{bins}} \frac{(P_i^{\text{exp}} - P_i^{\text{mcnp}})^2}{\sigma^2(P_i^{\text{exp}}) + \sigma^2(P_i^{\text{mcnp}})}$$

Equally weight χ^2 values in a cost function

A lower score indicates higher accuracy

$$\boxed{\text{Cost} = \sum_{m=1}^{5} \chi^2_{\text{red,mult},m} + \chi^2_{\text{red},k_{\text{eff}}}}$$

Multiplicity and k_{eff} simulations were performed for 500 unique realizations of $\overline{\nu}$ data

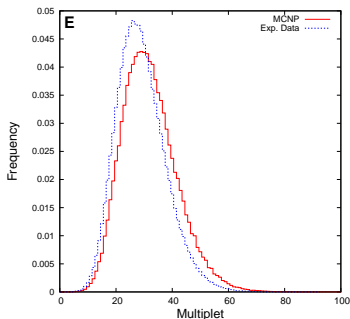| Trial	Cost	$\chi^2_{k_{eff}}$
$\overline{\nu}$ -1.14%	164.24	33.66
303	**197.07**	**4.18**
55	267.9	0.01
Original	426.86	0.27

MCNP criticality test suite performed for best data
which includes 39 criticality benchmarks w/ ^{239}Pu :

Trial	RMSD
$\overline{\nu}$ -1.14%	1.23%
303	0.51%
Original	0.49%

Energy-dependent $\overline{\nu}$ perturbations improved all 5 multiplicity distributions

- ▶ Plots for best data realization and 3.0 cm HDPE case
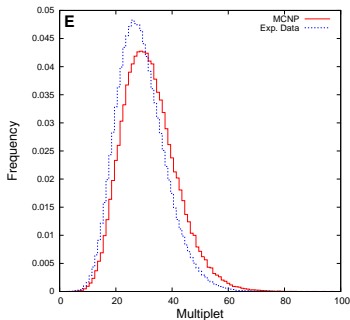

Original $\overline{\nu}$ Data
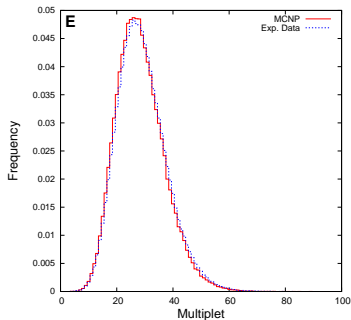
Trial 303: Lowest Cost

- ▶ Best data set reduced bias in 1st and 2nd moments, averaged over all 5 simulations, by $\sim 35\%$

Adjusting the fission cross section **uniformly** showed good correction to multiplicity simulations

Original σ_f Data **σ_f decreased 1.5%**

- High accuracy for all simulations: $\displaystyle\sum_{i=1}^{5} \chi^2_{red,mult,m} = 14.6$

- k_{eff} is **not preserved:** $\chi^2_{k_{\text{eff}}} = 22.6$

Simulations of Multiplicity Experiments with Nuclear Data Perturbations

Energy-dependent $\overline{\nu}$ perturbations reduced inaccuracies in multiplicity while preserving k_{eff}

- ► Majority of cross-correlation terms $\mathcal{O}(10^{-4})$ or less

- ► σ_f may need more investigation
  not sensitive to capture cross section

Subcritical simulations should be considered in validation of nuclear data

Covariance sampling methodology for nuclear data was developed and demonstrated

More details in: S.R. Bolding, M. Cleveland, and J.E. Morel. A HOLO Algorithm with ECMC for Radiative Transfer. NS&E: M&C 2015 Special Issue, 2016. Accepted.

Simulations of Neutron Multiplicity Experiments with Nuclear Data Perturbations

S.R. Bolding[1],   C.J. Solomon[2]

[1]*Texas A&M University, College station, TX*
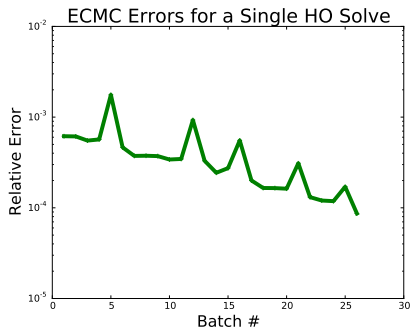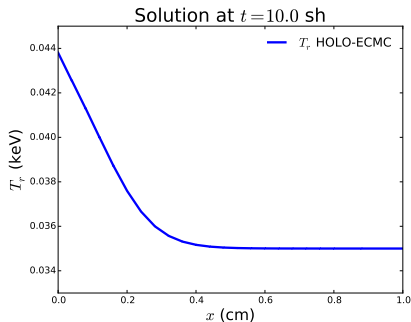[2]*Los Alamos National Laboratory, Los Alamos, NM*

4 August 2016

Backup Slides

S.R. Bolding[1],   C.J. Solomon[2]

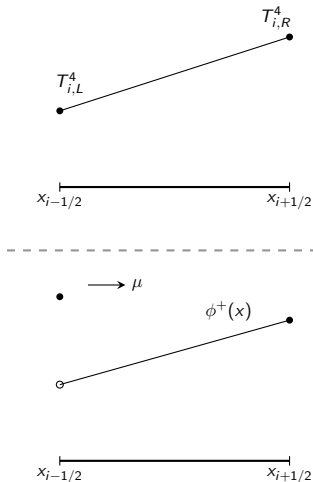[1] *Texas A&M University, College station, TX*
[2] *Los Alamos National Laboratory, Los Alamos, NM*

Exponential convergence can be maintained if the LDFE mesh resolves the solution reasonably

We can close equations with HO angular information and a linear-discontinuous (LD) spatial discretization

1. Assume $T(x)$ and $T^4(x)$ are LD

2. A lagged $\tilde{I}_{HO}^{n+1}$ is used to evaluate consistency terms

3. Eliminate $\phi_{i+1/2}^{\pm}$ with LD closure
   preserving equi. diff. limit

$$\phi_{i+1/2}^{+} = 2\langle\phi\rangle_{R,i}^{+} - \langle\phi\rangle_{L,i}^{+}$$

4. Global system solved with Newton's method and lagged **implicit opacities**
   Energy is always conserved

We need a way to resolve issues when the LDFE representation of the intensity is negative

Negative intensities can occur in optically thick cells
Mesh refinement is of minimal use

$\tilde{I}_{HO}(x, \mu)$ must be positive for consistency terms
to produce a physical, stable LO solution

Independent fix up for LO solution
E.g., lumping or preserving balance with floored $\phi(x)$

Can add source δ to produce a positive projection $\tilde{l}_{pos}$ such that $\tilde{l}_{pos}$ satisfies the latest residual equation

Produce $\tilde{l}_{\text{pos}}$ by scaling $x - \mu$ moments equally,
to estimate source for the next iteration

$$\mathbf{L}\tilde{l}^{(m)} = q - r^{(m)}$$
$$\mathbf{L}\tilde{l}_{\text{pos}}^{(m)} = q - r^{(m)} + \delta^{(m+1)}$$

$$\delta^{(m+1)} = \mathbf{L}\left(\tilde{l}^{(m)} - \tilde{l}_{\text{pos}}^{(m)}\right)$$
$$q \rightarrow q + \delta^{(m+1)}$$

We can delay error stagnation
Investigating alternative positive projection of l

Solving LO System with Newton's Method

- Linearization:
$$\underline{B}(T^{n+1}) = \underline{B}(T^*) + \left(T^{n+1} - T^*\right) \left.\frac{\partial \underline{B}}{\partial t}\right|_{t^*}$$

- Modified system

$$\left[\mathbf{D}(\mu^{\pm}) - \sigma_a^*(1 - f^*)\right] \underline{\Phi}^{n+1} = f^* \underline{B}(T^*) + \frac{\Phi^n}{c\Delta t}$$
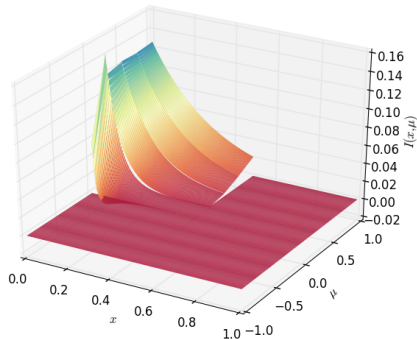
$$\boxed{\hat{\mathbf{D}}\Phi^{n+1} = \underline{Q}}$$

$$f = \left(1 + \sigma_a^* c\Delta t \frac{4aT^{*3}}{\rho c_v}\right)^{-1} \qquad T_i^* = \frac{T_{L,i}^* + T_{R,i}^*}{2}$$

- Equation for T^{n+1} based on linearization that is conservative

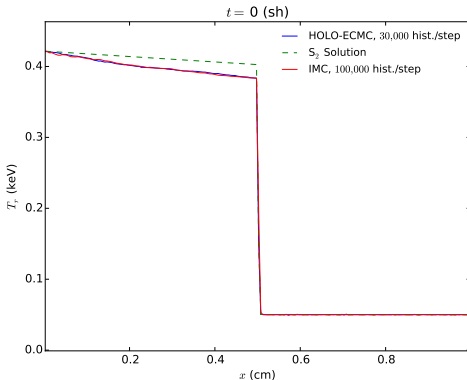- Converge T^{n+1} and $\langle\phi\rangle$ with Newton Iterations

The angular flux for the two material problem is difficult to resolve near $\mu = 0$

Two Material Problem, comparison in optically thin region

▶ Plot of radiation temperature after 10 time steps

Backup slide with timing results

Forming the LO System

► Taking moments of TE yields 4 equations, per cell i, e.g.

$$-2\mu_{i-1/2}^{n+1,+}\phi_{i-1/2}^{n+1,+} + \{\mu\}_{L,i}^{n+1,+}\langle\phi\rangle_{L,i}^{n+1,+} + \{\mu\}_{R,i}^{n+1,+}\langle\phi\rangle_{R,i}^{n+1,+} +$$

$$\left(\sigma_t^{n+1} + \frac{1}{c\Delta t}\right)h_i\langle\phi\rangle_{L,i}^{n+1,+} - \frac{\sigma_s h_i}{2}\left(\langle\phi\rangle_{L,i}^{n+1,+} + \langle\phi\rangle_{L,i}^{n+1,-}\right)$$

$$= \frac{h_i}{2}\langle\sigma_a^{n+1}acT^{n+1,4}\rangle_{L,i} + \frac{h_i}{c\Delta t}\langle\phi\rangle_{L,i}^{n,+}, \quad (1)$$

► Cell unknowns: $\langle\phi\rangle_{L,i}^+$, $\langle\phi\rangle_{R,i}^+$, $\langle\phi\rangle_{L,i}^-$, $\langle\phi\rangle_{R,i}^-$, T_L, T_R
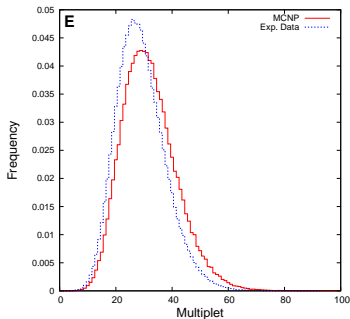
► Need angular consistency terms and spatial closure (LD)

Neutron multiplicity distributions provide passive multiplication information about a fissionable system

Energy-Integrated $\overline{\nu}$ Shift – 3.0 cm HDPE reflector

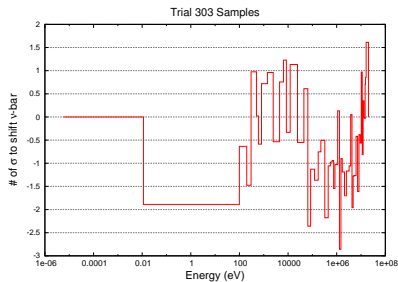# The best $\overline{\nu}$ data (trial 303)

Fractional shifts to cross sections were made for comparison

Adjusted cross section uniformly at all energies
compensated with σ_{tot} or σ_{el}

Increasing capture cross section was not effective
relative to variance in data

Scaling fission cross section 1.5% ($< 1\sigma$)
improved multiplicity distributions

- Adjust elastic scattering (σ_{el}) to compensate change in σ_f, for $E > 1$ keV

- Better improvement than *uniform* scaling of $\overline{\nu}$