Australian Government
Geoscience Australia

AUSPOS GPS Processing Report

April 14, 2011

This document is a report of the GPS data processing undertaken by the AUSPOS Online GPS Processing Service (version: AUSPOS 2.01) . The AUSPOS Online GPS Processing Service uses International GNSS Service (IGS) products (final, rapid, ultra-rapid depending on availability) to compute precise coordinates in ITRF anywhere on Earth and GDA94 within Australia. The Service is designed to process only dual frequency GPS phase data.

An overview of the GPS processing strategy is included in this report.

Please direct any correspondence to geodesy@ga.gov.au

National Geospatial Reference Systems
Geoscience Australia
Cnr Jerrabomberra and Hindmarsh Drive
GPO Box 378, Canberra, ACT 2601, Australia
Freecall (Within Australia): 1800 800 173
Tel: +61 2 6249 9111. Fax +61 2 6249 9929
Geoscience Australia
Home Page: http://www.ga.gov.au

©Commonwealth of Australia
(Geoscience Australia) 2011

1 User Data

All antenna heights refer to the vertical distance from the Ground Mark to the Antenna Reference Point (ARP).

Station (s)	Submitted File	Antenna Type	Antenna Height (m)	Start Time	End Time
CLF2	CLF2.11o	TRM41249.00 TZGD	1.358	2011/03/30 18:07:00	2011/03/30 23:45:00

2 Processing Summary

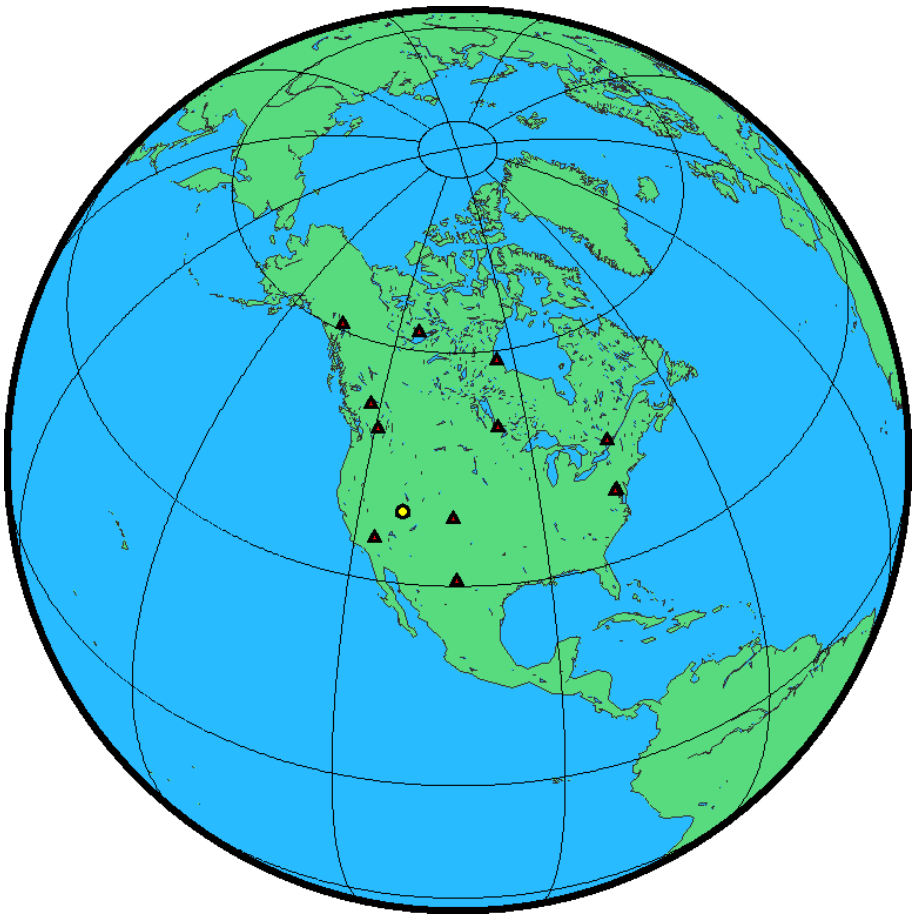

Date	User Stations	Reference Stations	Orbit Type
2011/03/30 18:07:00	CLF2	AMC2 CHUR DRAO DUBO GODE GOLD MDO1 NRC1 USNO WHIT WILL YELL	IGS rapid

Remark: An IGS Rapid Orbit product has been used in this computation, IGS Rapid orbits are usually of very high quality. However, to ensure you achieve the highest quality coordinates please resubmit approximately 2 weeks after the observation session end to ensure the use of the IGS Final Orbit product.

©Commonwealth of Australia
(Geoscience Australia) 2011

3 Computed Coordinates, ITRF2005

All computed coordinates are based on the IGS realisation of the ITRF2005 reference frame. All the given ITRF2005 coordinates refer to a mean epoch of the site observation data. All coordinates refer to the Ground Mark.

3.1 Cartesian, ITRF2005

Station	X (m)	Y (m)	Z (m)	ITRF2005 @
CLF2	-1924405.302	-4553771.178	4018597.823	30/03/2011
AMC2	-1248596.292	-4819428.224	3976505.983	30/03/2011
CHUR	-236438.976	-3307616.887	5430049.285	30/03/2011
DRAO	-2059164.909	-3621108.419	4814432.315	30/03/2011
DUBO	-417603.804	-4064529.816	4881432.155	30/03/2011
GODE	1130773.653	-4831253.568	3994200.436	30/03/2011
GOLD	-2353614.423	-4641385.297	3676976.415	30/03/2011
MDO1	-1329998.859	-5328393.388	3236504.146	30/03/2011
NRC1	1112777.098	-4341475.868	4522955.845	30/03/2011
USNO	1112189.676	-4842955.024	3985352.275	30/03/2011
WHIT	-2218338.051	-2201205.119	5543057.505	30/03/2011
WILL	-2084258.256	-3313873.004	5019853.027	30/03/2011
YELL	-1224452.794	-2689216.170	5633638.291	30/03/2011

3.2 Geodetic, GRS80 Ellipsoid, ITRF2005

Geoid-ellipsoidal separations, in this section, are computed using a spherical harmonic synthesis of the global EGM2008 geoid. More information on the EGM2008 geoid can be found at http://earth-info.nga.mil/GandG/wgs84/gravitymod/egm2008/

Station	Latitude (DMS)	Longitude (DMS)	Ellipsoidal Height(m)	Derived Above Geoid Height(m)
CLF2	39 17 42.60695	-112 54 31.40262	1370.008	1389.912
AMC2	38 48 11.24688	-104 31 28.54152	1911.415	1930.161
CHUR	58 45 32.67949	-94 05 19.42718	-19.276	28.889
DRAO	49 19 21.42620	-119 37 29.94015	541.910	558.458
DUBO	50 15 31.71170	-95 51 58.25559	245.281	274.974
GODE	39 01 18.22017	-76 49 36.59228	14.492	47.757
GOLD	35 25 30.56102	-116 53 21.30462	986.666	1017.358
MDO1	30 40 49.83933	-104 00 53.97786	2004.517	2026.596
NRC1	45 27 14.98598	-75 37 25.78539	82.510	116.042
USNO	38 55 08.26673	-77 03 58.41406	48.857	81.724
WHIT	60 45 01.83990	-135 13 19.60825	1427.399	1419.584
WILL	52 14 12.72203	-122 10 04.12772	1095.705	1110.449
YELL	62 28 51.21573	-114 28 50.53298	180.951	207.666

©Commonwealth of Australia
(Geoscience Australia) 2011

4 Solution Information

4.1 Coordinate Precision - Geodetic, One Sigma

Station	σ East (m)	σ North (m)	σ Up (m)
CLF2	0.002	0.002	0.003
AMC2	0.002	0.002	0.003
CHUR	0.002	0.002	0.003
DRAO	0.002	0.002	0.003
DUBO	0.002	0.002	0.003
GODE	0.002	0.002	0.004
GOLD	0.002	0.002	0.004
MDO1	0.002	0.002	0.004
NRC1	0.002	0.002	0.003
USNO	0.002	0.002	0.004
WHIT	0.002	0.002	0.004
WILL	0.002	0.002	0.003
YELL	0.002	0.002	0.003

4.2 Ambiguity Resolution - per baseline

Baseline	Ambiguities Resolved	Baseline Length (km)
DRAO - WILL	85.7 %	370.4
CHUR - YELL	88.9 %	1183.2
CHUR - DUBO	87.5 %	952.2
WHIT - YELL	87.0 %	1110.9
CLF2 - GOLD	70.8 %	555.5
WILL - YELL	80.0 %	1227.3
CLF2 - WILL	87.5 %	1601.7
DUBO - NRC1	76.5 %	1596.0
AMC2 - CLF2	82.4 %	727.4
AMC2 - MDO1	75.0 %	901.8
GODE - USNO	88.9 %	23.7
GODE - NRC1	84.2 %	721.0
AVERAGE	82.5%	914.3

Please note for a regional solution, such as used by AUSPOS, an average ambiguity resolution of 50% or better for the network indicates a reliable solution.

©Commonwealth of Australia
(Geoscience Australia) 2011

5 Computation Standards

5.1 Computation System

Software	Bernese GPS Software Version 5.0.
GNSS system(s)	GPS only.

5.2 Data Preprocessing and Measurement Modelling

Data preprocessing	Phase preprocessing is undertaken in a baseline by baseline mode using triple-differences. In most cases, cycle slips are fixed by the simultaneous analysis of different linear combinations of L1 and L2. If a cycle slip cannot be fixed reliably, bad data points are removed or new ambiguities are set up A data screening step on the basis of weighted postfit residuals is also performed, and outliers are removed.
Basic observable	Carrier phase with an elevation angle cutoff of 10° and a sampling rate of 3 minutes. However, data cleaning is performed a sampling rate of 30 seconds. Elevation dependent weighting is applied according to $1/\sin(e)^2$ where e is the satellite elevation. The code observable is only used for the receiver clock synchronisation.
Modelled observable	Double differences of the ionosphere-free linear combination.
Ground antenna phase centre calibrations	IGS05 absolute phase-centre variation model is applied.
Tropospheric Model	A priori model is the Saastamoinen-based hydrostatic mapped with the dry-Niell.
Tropospheric Estimation	Zenith delay corrections are estimated relying on the wet-Niell mapping function in intervals of 2 hour. N-S and E-W horizontal delay parameters are solved for every 24 hours.
Tropospheric Mapping Function	Niell
Ionosphere	First-order effect eliminated by forming the ionosphere-free linear combination of L1 and L2.
Tidal displacements	Solid earth tidal displacements are derived from the complete model from the IERS Conventions 2003, but ocean tide loading is not applied.
Atmospheric loading	Not applied
Satellite centre of mass correction	IGS05 phase-centre variation model applied
Satellite phase centre calibration	IGS05 phase-centre variation model applied
Satellite trajectories	Best available IGS products.
Earth Orientation	Best available IGS products.

©Commonwealth of Australia
(Geoscience Australia) 2011

5.3 Estimation Process

Adjustment	Weighted least-squares algorithm.
Station coordinates	Coordinate constraints are applied at the Reference sites with standard deviation of 5mm and 10mm for horizontal and vertical components respectively.
Troposphere	Zenith delay parameters and pairs of horizontal delay gradient parameters are estimated for each station in intervals of 2 hour and 24 hours.
Ionospheric correction	An ionospheric map derived from the contributing reference stations is used to aid ambiguity resolution using the QIF strategy
Ambiguity	Ambiguities are resolved in a baseline-by-baseline mode using Quasi-Ionosphere-Free (QIF) approach.

5.4 Reference Frame

Terrestrial reference frame	IGS05 station coordinates and velocities mapped to the mean epoch of observation.
Australian datum	GDA94 coordinates determined via Helmert transformation from ITRF using the Dawson and Woods (2010) parameters.
Derived AHD	For stations within Australia, AUSGeoid09 is used to compute AHD. AUSGeoid09 is the Australia-wide gravimetric quasigeoid model that has been a posteriori fitted to the Australian Height Datum
Above-geoid heights	Earth Gravitational Model EGM2008 released by the National Geospatial-Intelligence Agency (NGA) EGM Development Team is used to compute above-geoid heights. This gravitational model is complete to spherical harmonic degree and order 2159, and contains additional coefficients extending to degree 2190 and order 2159.

©Commonwealth of Australia
(Geoscience Australia) 2011