Australian Government
Geoscience Australia

AUSPOS GPS Processing Report

April 14, 2011

This document is a report of the GPS data processing undertaken by the AUSPOS Online GPS Processing Service (version: AUSPOS 2.01) . The AUSPOS Online GPS Processing Service uses International GNSS Service (IGS) products (final, rapid, ultra-rapid depending on availability) to compute precise coordinates in ITRF anywhere on Earth and GDA94 within Australia. The Service is designed to process only dual frequency GPS phase data.

An overview of the GPS processing strategy is included in this report.

Please direct any correspondence to geodesy@ga.gov.au

National Geospatial Reference Systems
Geoscience Australia
Cnr Jerrabomberra and Hindmarsh Drive
GPO Box 378, Canberra, ACT 2601, Australia
Freecall (Within Australia): 1800 800 173
Tel: +61 2 6249 9111. Fax +61 2 6249 9929
Geoscience Australia
Home Page: http://www.ga.gov.au

©Commonwealth of Australia
(Geoscience Australia) 2011

1 User Data

All antenna heights refer to the vertical distance from the Ground Mark to the Antenna Reference Point (ARP).

Station (s)	Submitted File	Antenna Type	Antenna Height (m)	Start Time	End Time
USER	MD2.11o	TRM41249.00 TZGD	1.352	2011/03/29 20:56:00	2011/03/30 17:06:00

2 Processing Summary

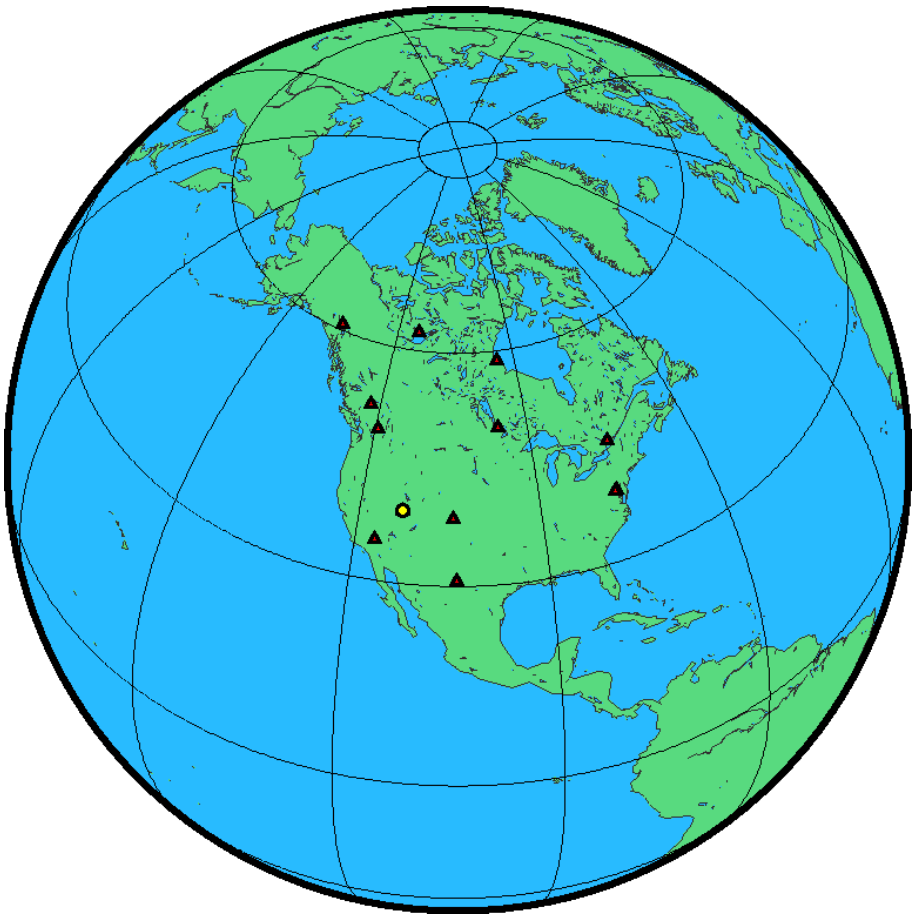

Date	User Stations	Reference Stations	Orbit Type
2011/03/29 20:56:00	USER	AMC2 CHUR DRAO DUBO GODE GOLD MDO1 NRC1 USNO WHIT WILL YELL	IGS rapid

Remark: An IGS Rapid Orbit product has been used in this computation, IGS Rapid orbits are usually of very high quality. However, to ensure you achieve the highest quality coordinates please resubmit approximately 2 weeks after the observation session end to ensure the use of the IGS Final Orbit product.

©Commonwealth of Australia
(Geoscience Australia) 2011

3 Computed Coordinates, ITRF2005

All computed coordinates are based on the IGS realisation of the ITRF2005 reference frame. All the given ITRF2005 coordinates refer to a mean epoch of the site observation data. All coordinates refer to the Ground Mark.

3.1 Cartesian, ITRF2005

Station	X (m)	Y (m)	Z (m)	ITRF2005 @
USER	-1926193.136	-4539634.759	4033940.328	29/03/2011
AMC2	-1248596.277	-4819428.213	3976505.966	29/03/2011
CHUR	-236438.972	-3307616.903	5430049.291	29/03/2011
DRAO	-2059164.899	-3621108.421	4814432.305	29/03/2011
DUBO	-417603.797	-4064529.830	4881432.161	29/03/2011
GODE	1130773.661	-4831253.596	3994200.457	29/03/2011
GOLD	-2353614.413	-4641385.296	3676976.408	29/03/2011
MDO1	-1329998.847	-5328393.387	3236504.124	29/03/2011
NRC1	1112777.104	-4341475.887	4522955.855	29/03/2011
USNO	1112189.686	-4842955.052	3985352.298	29/03/2011
WHIT	-2218338.047	-2201205.135	5543057.524	29/03/2011
WILL	-2084258.252	-3313873.017	5019853.030	29/03/2011
YELL	-1224452.790	-2689216.184	5633638.297	29/03/2011

3.2 Geodetic, GRS80 Ellipsoid, ITRF2005

Geoid-ellipsoidal separations, in this section, are computed using a spherical harmonic synthesis of the global EGM2008 geoid. More information on the EGM2008 geoid can be found at http://earth-info.nga.mil/GandG/wgs84/gravitymod/egm2008/

Station	Latitude (DMS)	Longitude (DMS)	Ellipsoidal Height(m)	Derived Above Geoid Height(m)
USER	39 28 20.46215	-112 59 30.45000	1582.475	1601.931
AMC2	38 48 11.24676	-104 31 28.54101	1911.393	1930.139
CHUR	58 45 32.67916	-94 05 19.42685	-19.263	28.902
DRAO	49 19 21.42608	-119 37 29.93967	541.901	558.449
DUBO	50 15 31.71147	-95 51 58.25518	245.294	274.987
GODE	39 01 18.22012	-76 49 36.59222	14.528	47.793
GOLD	35 25 30.56092	-116 53 21.30427	986.658	1017.350
MDO1	30 40 49.83879	-104 00 53.97743	2004.503	2026.582
NRC1	45 27 14.98576	-75 37 25.78535	82.531	116.063
USNO	38 55 08.26671	-77 03 58.41392	48.894	81.761
WHIT	60 45 01.83997	-135 13 19.60733	1427.420	1419.605
WILL	52 14 12.72188	-122 10 04.12717	1095.713	1110.457
YELL	62 28 51.21551	-114 28 50.53232	180.962	207.677

©Commonwealth of Australia
(Geoscience Australia) 2011

4 Solution Information

4.1 Coordinate Precision - Geodetic, One Sigma

Station	σ East (m)	σ North (m)	σ Up (m)
USER	0.001	0.001	0.003
AMC2	0.001	0.001	0.003
CHUR	0.001	0.002	0.003
DRAO	0.001	0.001	0.003
DUBO	0.001	0.001	0.003
GODE	0.002	0.001	0.003
GOLD	0.001	0.002	0.003
MDO1	0.001	0.002	0.003
NRC1	0.002	0.001	0.003
USNO	0.002	0.001	0.003
WHIT	0.002	0.001	0.003
WILL	0.001	0.001	0.003
YELL	0.001	0.002	0.003

4.2 Ambiguity Resolution - per baseline

Baseline	Ambiguities Resolved	Baseline Length (km)
DRAO - WILL	95.3 %	370.4
CHUR - YELL	85.0 %	1183.2
CHUR - DUBO	93.9 %	952.2
GOLD - USER	91.1 %	566.1
DRAO - USER	91.1 %	1212.7
WHIT - YELL	88.6 %	1110.9
AMC2 - USER	91.1 %	735.3
WILL - YELL	89.2 %	1227.3
DUBO - NRC1	89.3 %	1596.0
AMC2 - MDO1	91.5 %	901.8
GODE - NRC1	87.3 %	721.0
NRC1 - USNO	90.6 %	735.2
AVERAGE	90.2%	942.7

Please note for a regional solution, such as used by AUSPOS, an average ambiguity resolution of 50% or better for the network indicates a reliable solution.

©Commonwealth of Australia
(Geoscience Australia) 2011

5 Computation Standards

5.1 Computation System

Software	Bernese GPS Software Version 5.0.
GNSS system(s)	GPS only.

5.2 Data Preprocessing and Measurement Modelling

Data preprocessing	Phase preprocessing is undertaken in a baseline by baseline mode using triple-differences. In most cases, cycle slips are fixed by the simultaneous analysis of different linear combinations of L1 and L2. If a cycle slip cannot be fixed reliably, bad data points are removed or new ambiguities are set up A data screening step on the basis of weighted postfit residuals is also performed, and outliers are removed.
Basic observable	Carrier phase with an elevation angle cutoff of 10° and a sampling rate of 3 minutes. However, data cleaning is performed a sampling rate of 30 seconds. Elevation dependent weighting is applied according to $1/\sin(e)^2$ where e is the satellite elevation. The code observable is only used for the receiver clock synchronisation.
Modelled observable	Double differences of the ionosphere-free linear combination.
Ground antenna phase centre calibrations	IGS05 absolute phase-centre variation model is applied.
Tropospheric Model	A priori model is the Saastamoinen-based hydrostatic mapped with the dry-Niell.
Tropospheric Estimation	Zenith delay corrections are estimated relying on the wet-Niell mapping function in intervals of 2 hour. N-S and E-W horizontal delay parameters are solved for every 24 hours.
Tropospheric Mapping Function	Niell
Ionosphere	First-order effect eliminated by forming the ionosphere-free linear combination of L1 and L2.
Tidal displacements	Solid earth tidal displacements are derived from the complete model from the IERS Conventions 2003, but ocean tide loading is not applied.
Atmospheric loading	Not applied
Satellite centre of mass correction	IGS05 phase-centre variation model applied
Satellite phase centre calibration	IGS05 phase-centre variation model applied
Satellite trajectories	Best available IGS products.
Earth Orientation	Best available IGS products.

©Commonwealth of Australia
(Geoscience Australia) 2011

5.3 Estimation Process

Adjustment	Weighted least-squares algorithm.
Station coordinates	Coordinate constraints are applied at the Reference sites with standard deviation of 5mm and 10mm for horizontal and vertical components respectively.
Troposphere	Zenith delay parameters and pairs of horizontal delay gradient parameters are estimated for each station in intervals of 2 hour and 24 hours.
Ionospheric correction	An ionospheric map derived from the contributing reference stations is used to aid ambiguity resolution using the QIF strategy
Ambiguity	Ambiguities are resolved in a baseline-by-baseline mode using Quasi-Ionosphere-Free (QIF) approach.

5.4 Reference Frame

Terrestrial reference frame	IGS05 station coordinates and velocities mapped to the mean epoch of observation.
Australian datum	GDA94 coordinates determined via Helmert transformation from ITRF using the Dawson and Woods (2010) parameters.
Derived AHD	For stations within Australia, AUSGeoid09 is used to compute AHD. AUSGeoid09 is the Australia-wide gravimetric quasigeoid model that has been a posteriori fitted to the Australian Height Datum
Above-geoid heights	Earth Gravitational Model EGM2008 released by the National Geospatial-Intelligence Agency (NGA) EGM Development Team is used to compute above-geoid heights. This gravitational model is complete to spherical harmonic degree and order 2159, and contains additional coefficients extending to degree 2190 and order 2159.

©Commonwealth of Australia
(Geoscience Australia) 2011