


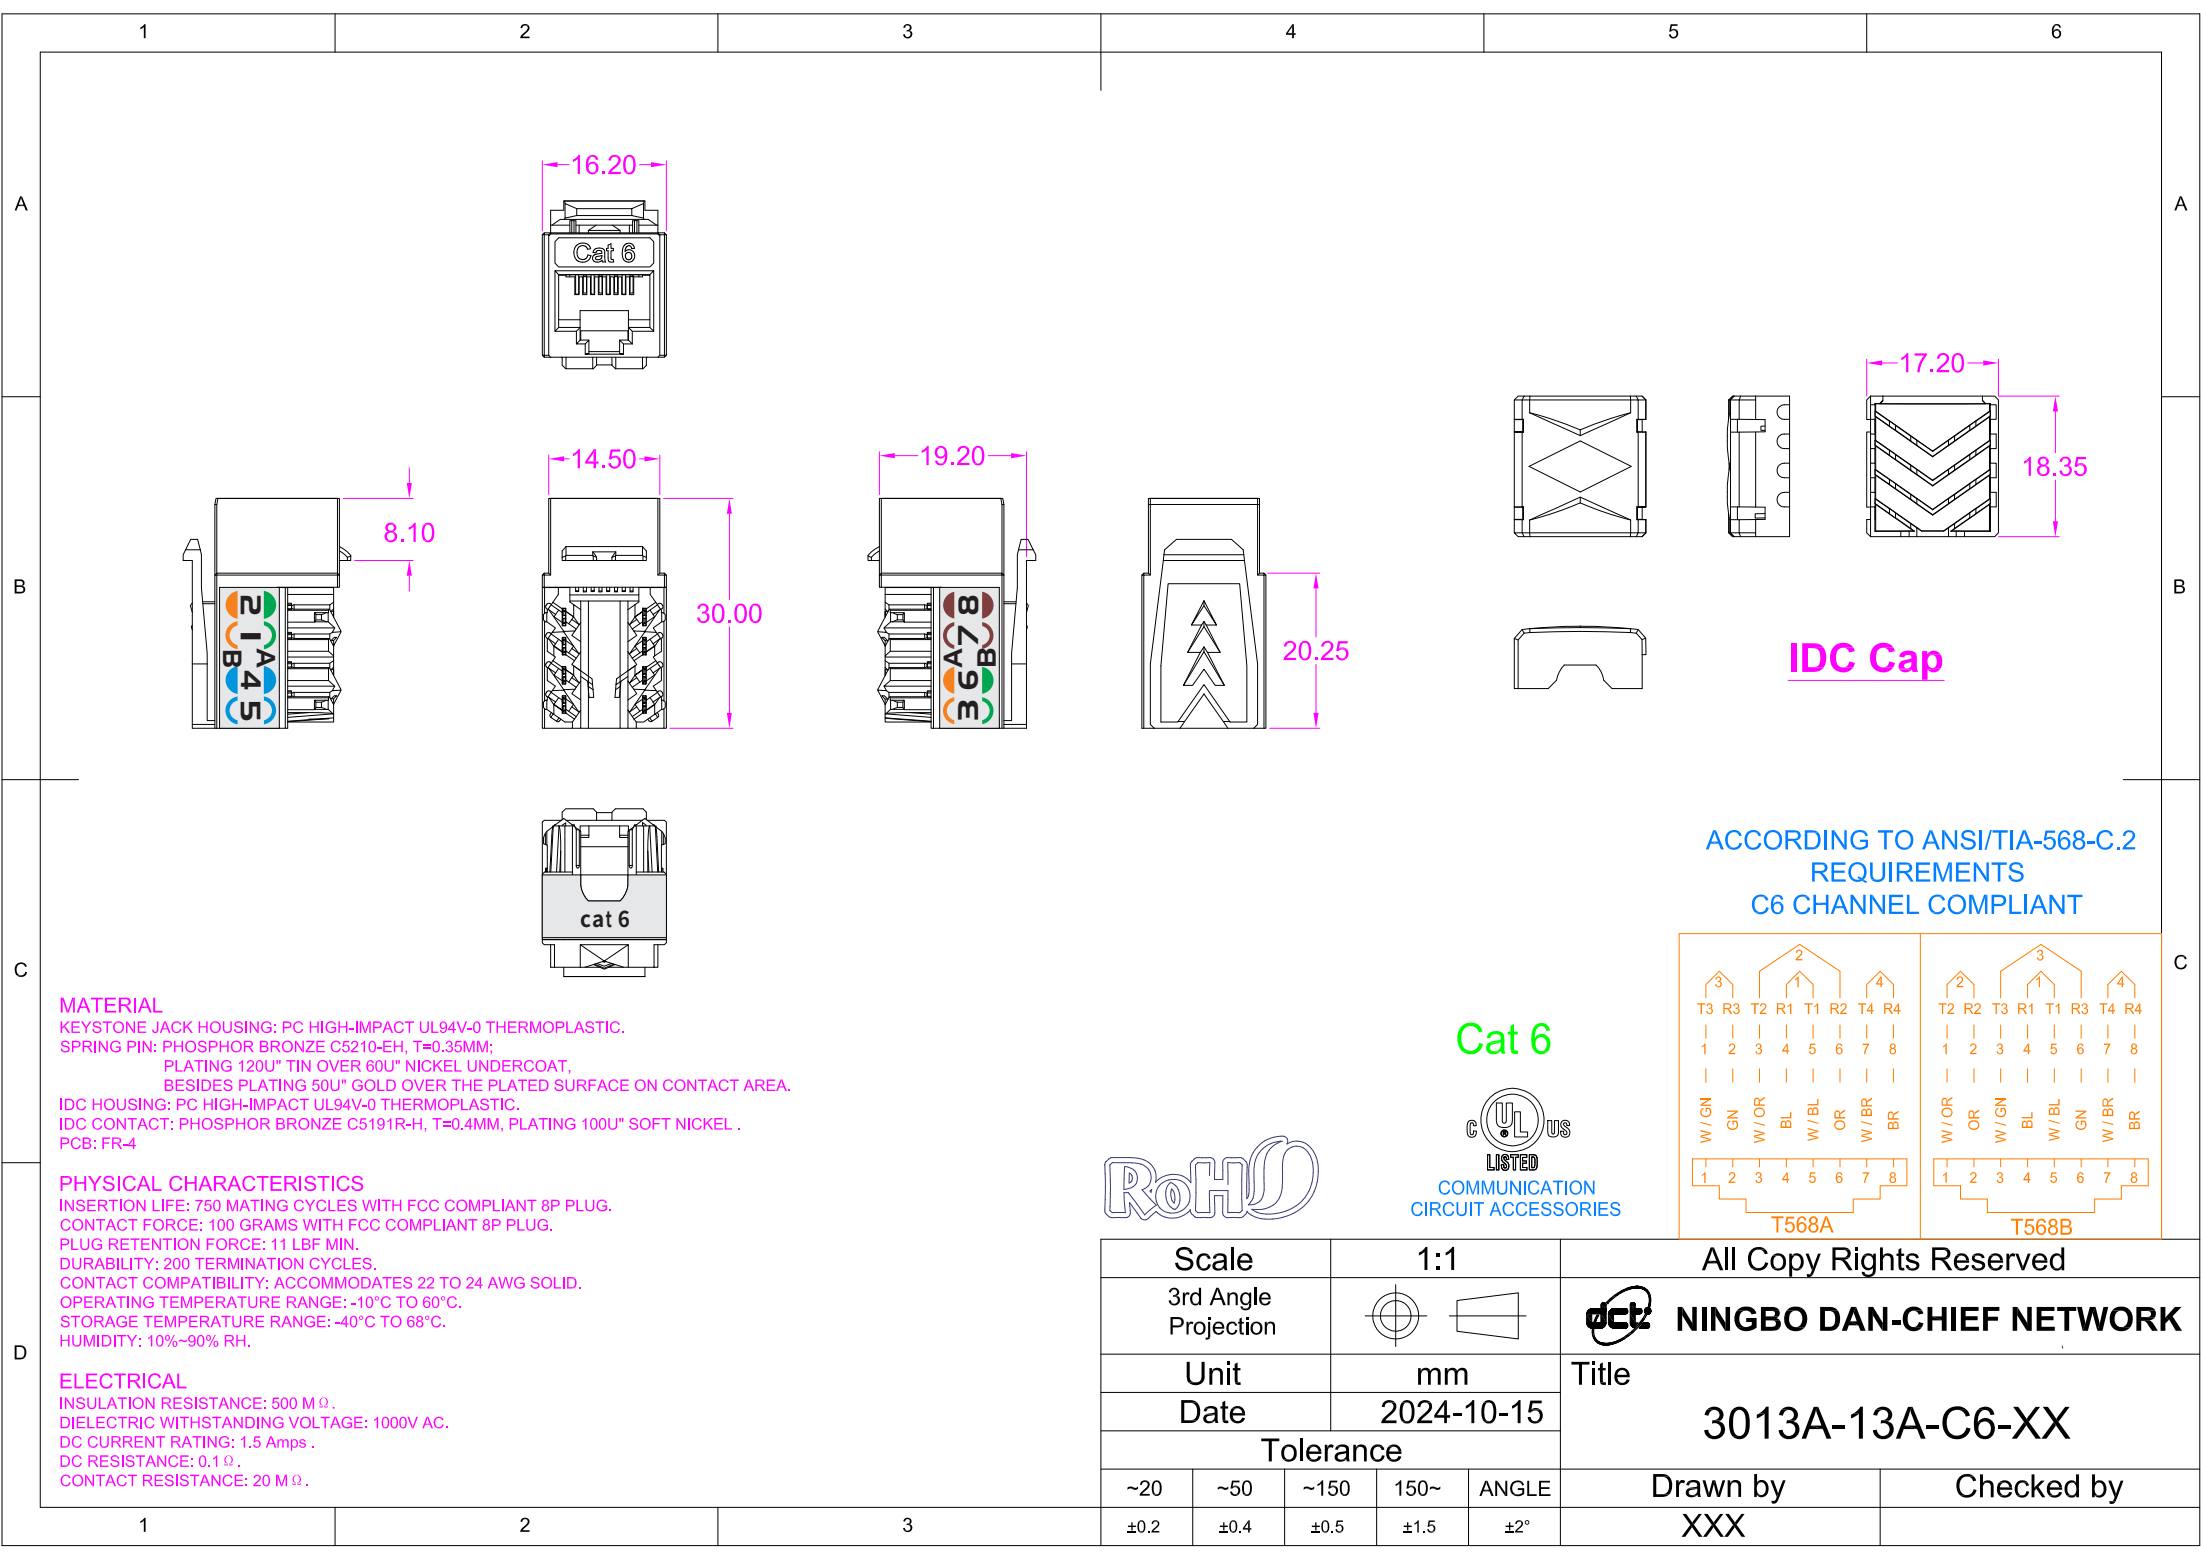


MATERIAL
KEYSTONE JACK HOUSING: PC HIGH-IMPACT UL94V-0 THERMOPLASTIC.
SPRING PIN: PHOSPHOR BRONZE C5210-EH, T=0.35MM;
PLATING 120U" TIN OVER 60U" NICKEL UNDERCOAT,
BESIDES PLATING 50U" GOLD OVER THE PLATED SURFACE ON CONTACT AREA.
IDC HOUSING: PC HIGH-IMPACT UL94V-0 THERMOPLASTIC.
IDC CONTACT: PHOSPHOR BRONZE C5191R-H, T=0.4MM, PLATING 100U" SOFT NICKEL .
PCB: FR-4


PHYSICAL CHARACTERISTICS
INSERTION LIFE: 750 MATING CYCLES WITH FCC COMPLIANT 8P PLUG.
CONTACT FORCE: 100 GRAMS WITH FCC COMPLIANT 8P PLUG.
PLUG RETENTION FORCE: 11 LBF MIN.
DURABILITY: 200 TERMINATION CYCLES.
CONTACT COMPATIBILITY: ACCOMMODATES 22 TO 24 AWG SOLID.
OPERATING TEMPERATURE RANGE: -10°C TO 60°C.
STORAGE TEMPERATURE RANGE: -40°C TO 68°C.
HUMIDITY: 10%~90% RH.

ELECTRICAL
INSULATION RESISTANCE: 500 M Ω .
DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC.
DC CURRENT RATING: 1.5 Amps .
DC RESISTANCE: 0.1 Ω .
CONTACT RESISTANCE: 20 M Ω .

ACCORDING TO ANSI/TIA-568-C.2
REQUIREMENTS
C6 CHANNEL COMPLIANT

Cat 6

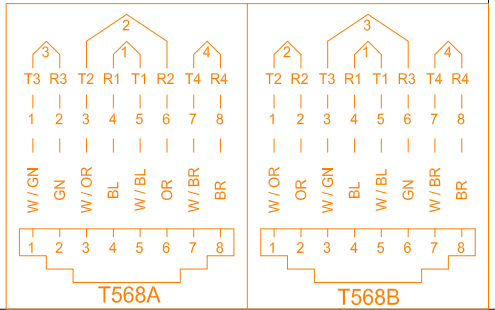

Scale		1:1			All Copy Rights Reserved	
3rd Angle Projection					 NINGBO DAN-CHIEF NETWORK	
Unit		mm			Title 3013A-13A-C6-XX	
Date		2024-10-15				
Tolerance						
~20	~50	~150	150~	ANGLE	Drawn by	Checked by
±0.2	±0.4	±0.5	±1.5	±2°	XXX	