
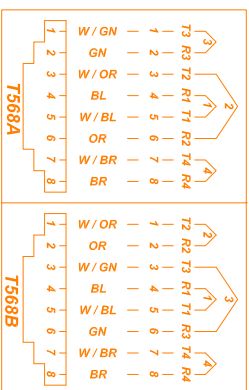
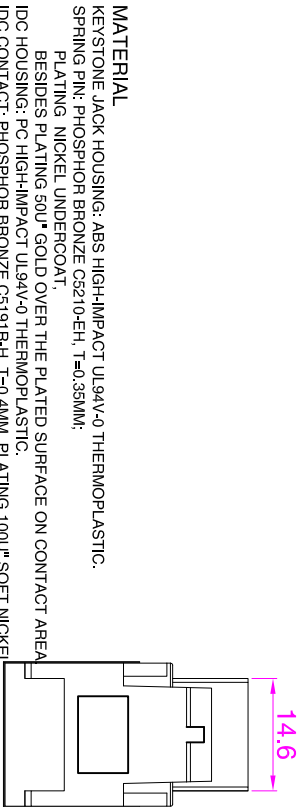







发行章
量产图



ACCORDING TO ANSI/TIA-568.2-D
REQUIREMENTS
C6 CHANNEL COMPLIANT

PHYSICAL CHARACTERISTICS
INSERTION LIFE: 750 MATING CYCLES WITH FCC COMPLIANT 8P PLUG.
CONTACT FORCE: 100 GRAMS WITH FCC COMPLIANT 8P PLUG.
PLUG RETENTION FORCE: 11 LBF MIN.
DURABILITY: 200 TERMINATION CYCLES.
CONTACT COMPATIBILITY: ACCOMMODATES 22 TO 24 AWG SOLID.
OPERATING TEMPERATURE RANGE: -10°C TO 60°C.
STORAGE TEMPERATURE RANGE: -40°C TO 88°C.
HUMIDITY: 10%~90% RH.

MATERIAL
KEYSTONE JACK HOUSING: ABS HIGH-IMPACT UL94V-0 THERMOPLASTIC.
SPRING PIN: PHOSPHOR BRONZE C5210-EH, T=0.35MM.
PLATING: NICKEL UNDERCOAT.
BESIDES PLATING 50U" GOLD OVER THE PLATED SURFACE ON CONTACT AREA.
IDC HOUSING: PC HIGH-IMPACT UL94V-0 THERMOPLASTIC.
IDC CONTACT: PHOSPHOR BRONZE C5191RH, T=0.4MM, PLATING 100U" SOFT NICKEL.
POB: FR-4

ENCLOSURE
ClampX 1 PC

Scale 1:1

3rd Angle Projection

Unit mm

Date 2021-02-03

Tolerance

~20 ±0.2 ~50 ±0.5 ~150 ±1.5 150~ ±2° ANGLE ±2°

All Copy Rights Reserved

DAN-CHIEF TECHNOLOGY CO., LTD.

3013A-36A-C6-M74

Drawn by WLL

Checked by

3013A-36A-C6-M74