


INSTITUT UNIVERSITAIRE DES SCIENCES


TD #8 RÉSEAU 1

INNOCENT COFFY MANAHENN


FST L3

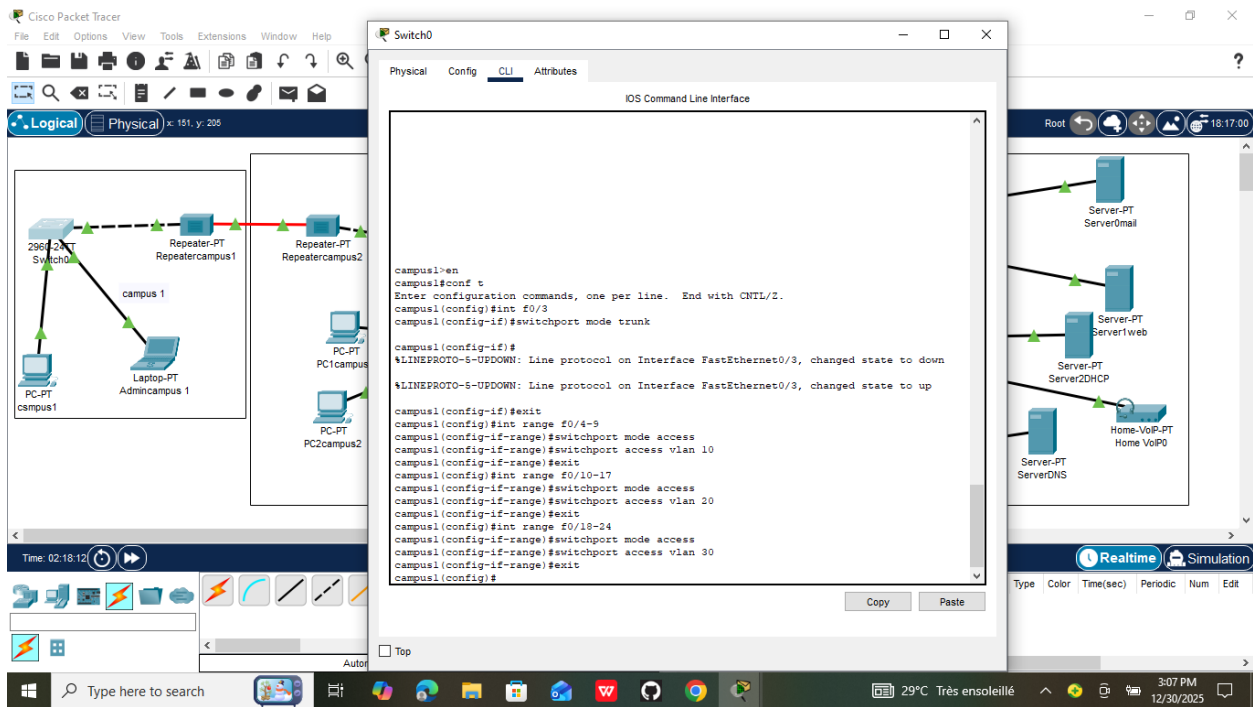


Configuration switch

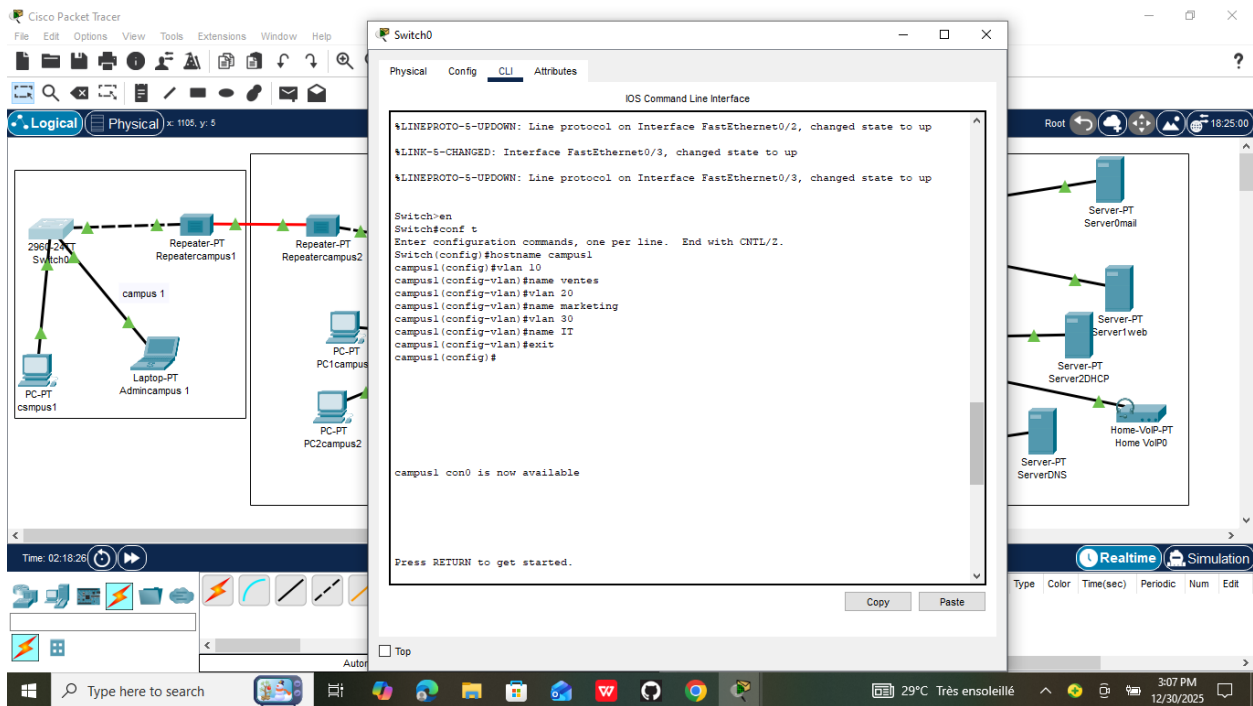


Configuration switch

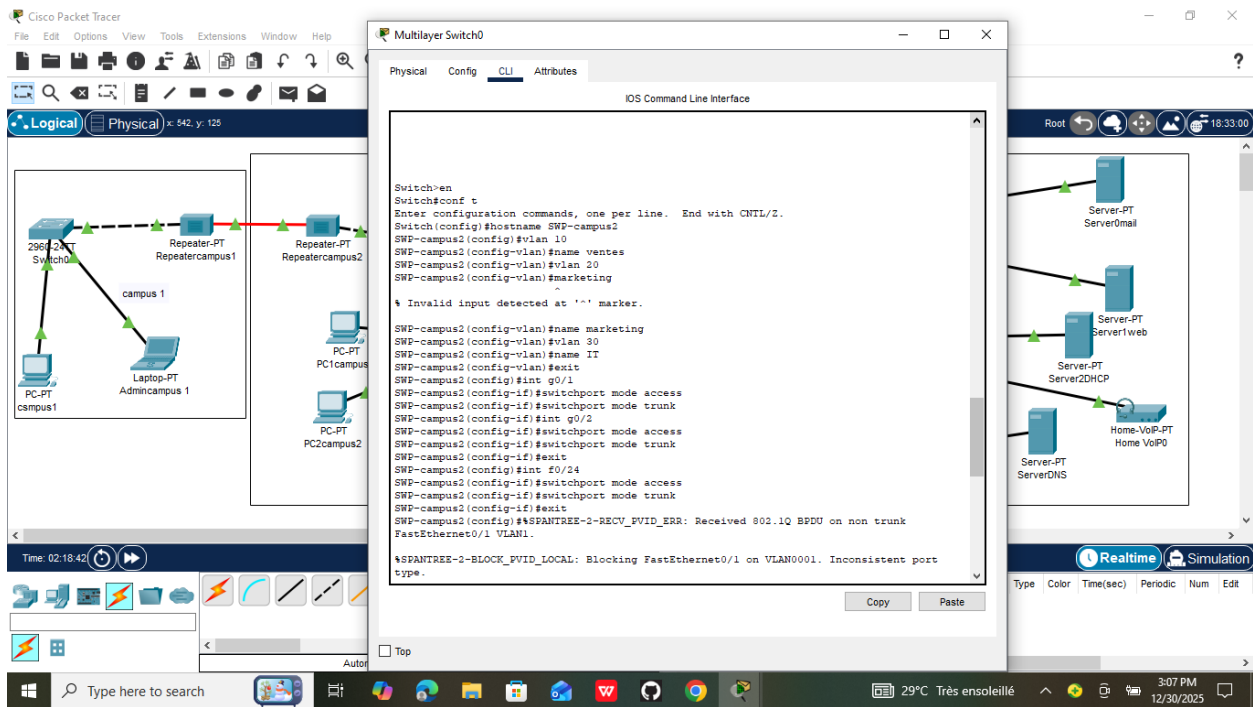


Configuration vlan sur les 3 switches

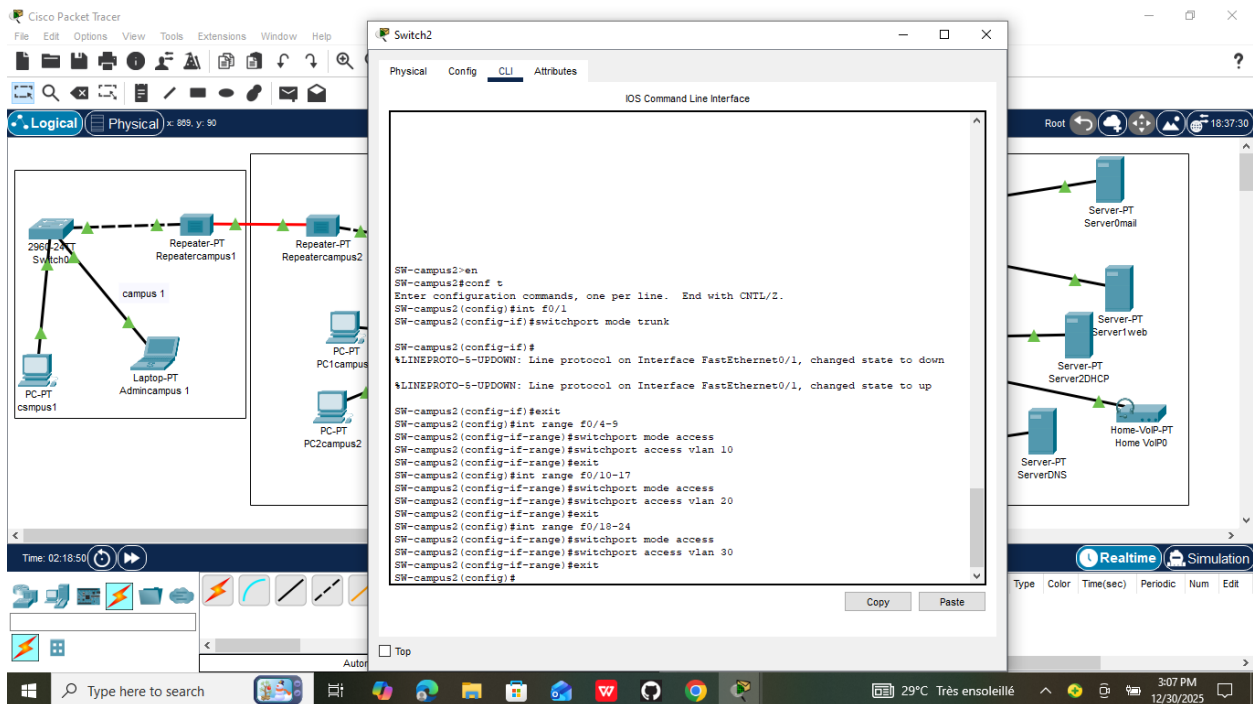


Configuration switch 2 et 3

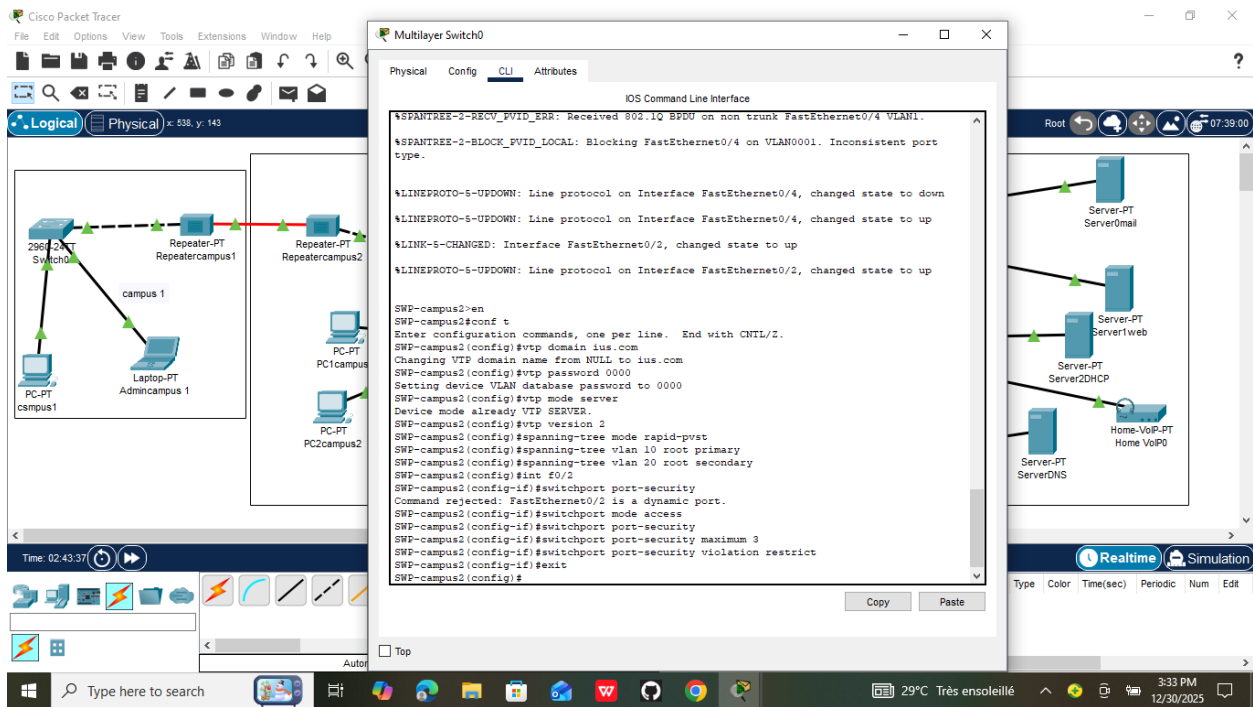


Configuration des vlans dans switch 2 et 3

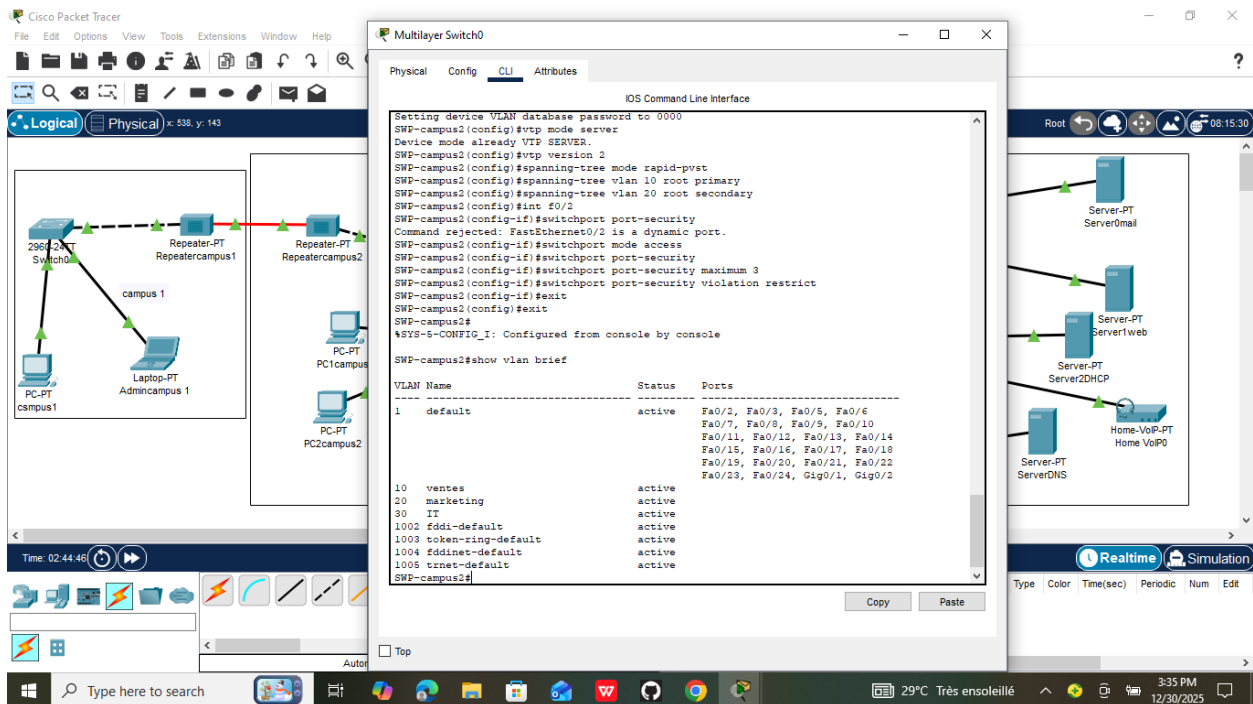

Verification des vlan sur switch principal

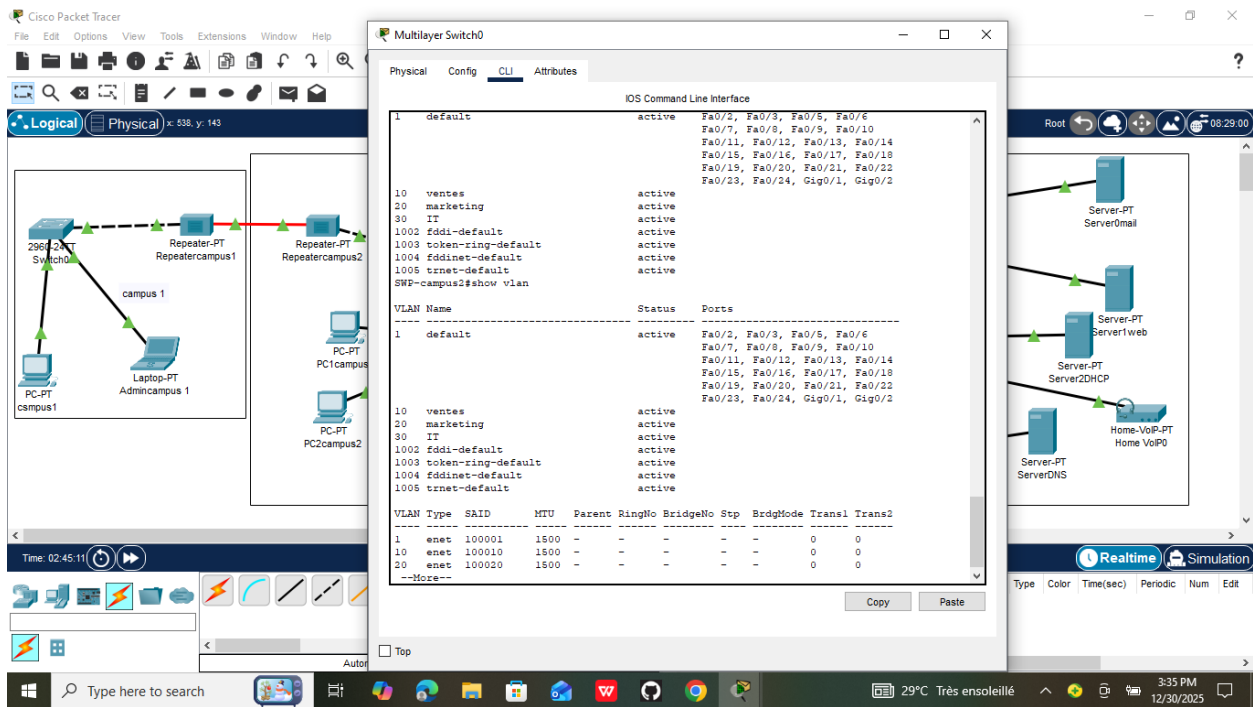

Verification sur le switch principal

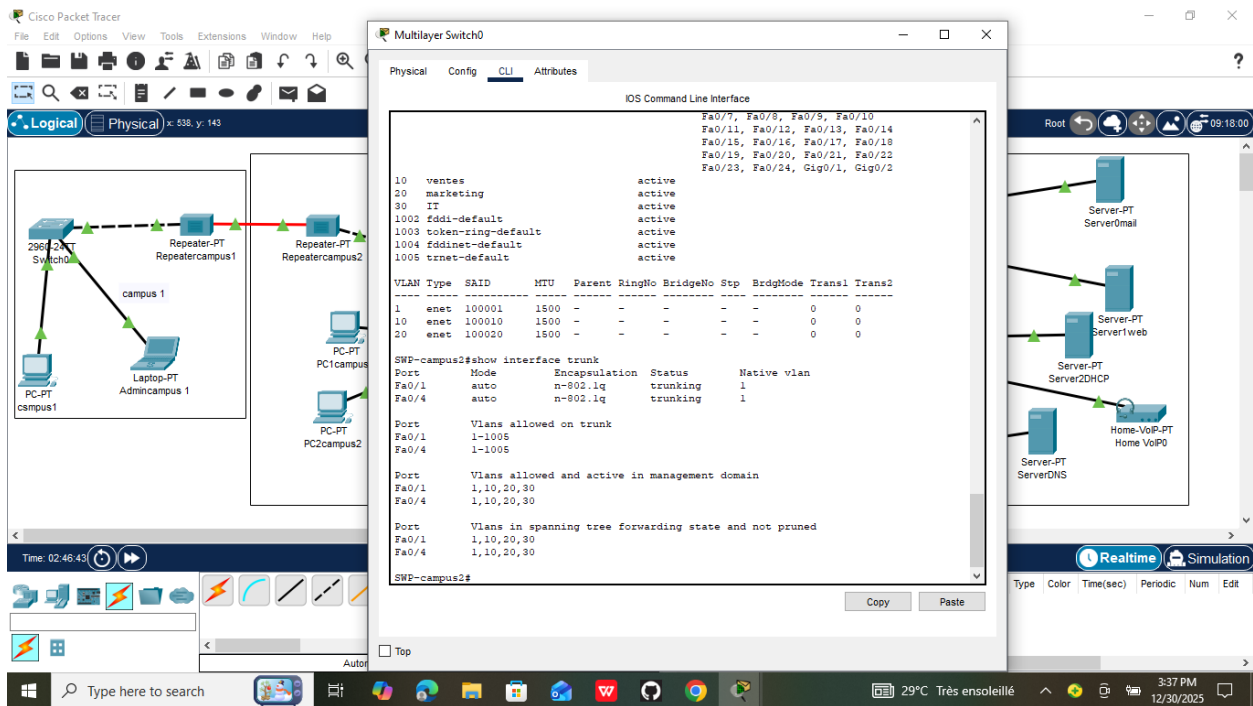

Cisco Packet Tracer

File Edit Options View Tools Extensions Window Help

Logical Physical x: 538, y: 143

SWP-campus2#show interface trunk

Port	Mode	Encapsulation	Status	Native vlan
Fa0/1	auto	n-802.1q	trunking	1
Fa0/4	auto	n-802.1q	trunking	1

Port Vlan allowed on trunk

Port	Vlan allowed on trunk
Fa0/1	1-1005
Fa0/4	1-1005

Port Vlan allowed and active in management domain

Port	Vlan allowed and active in management domain
Fa0/1	1,10,20,30
Fa0/4	1,10,20,30

Port Vlan in spanning tree forwarding state and not pruned

Port	Vlan in spanning tree forwarding state and not pruned
Fa0/1	1,10,20,30
Fa0/4	1,10,20,30

SWP-campus2#show vtp status

VTP Version capable : 1 to 2
VTP version running : 1
VTP Domain Name : sus.com
VTP Pruning Mode : Disabled
VTP Traps Generation : Disabled
Device ID : 000D.B5E0.3200
Configuration last modified by 0.0.0.0 at 8-1-93 02:27:45
Local updater ID is 0.0.0.0 (no valid interface found)

Feature VLAN :

VTP Operating Mode : Server
Maximum VLANs supported locally : 1005
Number of existing VLANs : 8
Configuration Revision : 7
MDS digest : 0x69 0x0A 0xA6 0x01 0xEE 0x26 0x16 0x9D
0x14 0x33 0xD1 0xDC 0x5C 0x6C 0xB0 0x76

SWP-campus2#

Copy Paste

Time: 02:47:21

337 PM 12/30/2025

Cisco Packet Tracer

File Edit Options View Tools Extensions Window Help

Logical Physical x: 538, y: 143

SWP-campus2#show spanning-tree security

% Invalid input detected at '' marker.

SWP-campus2#show spanning-tree summary

Switch is in rapid-pvst mode
Root bridge for: ventes marketing
Extended system ID is enabled
PortFast Default is disabled
PortFast BPDU Guard Default is disabled
PortFast BPDU Filter Default is disabled
Loopguard Default is disabled
EtherChannel misconfig guard is disabled
UplinkFast is disabled
BackboneFast is disabled
Configured Pathcost method used is short

Name	Blocking	Listening	Learning	Forwarding	STP Active
VLAN0001	1	0	0	3	4
VLAN0010	3	0	0	1	4
VLAN0020	3	0	0	1	4
VLAN0030	3	0	0	1	4


4 vlans 10 0 0 6 16

SWP-campus2#

Copy Paste

Time: 02:48:55

339 PM 12/30/2025

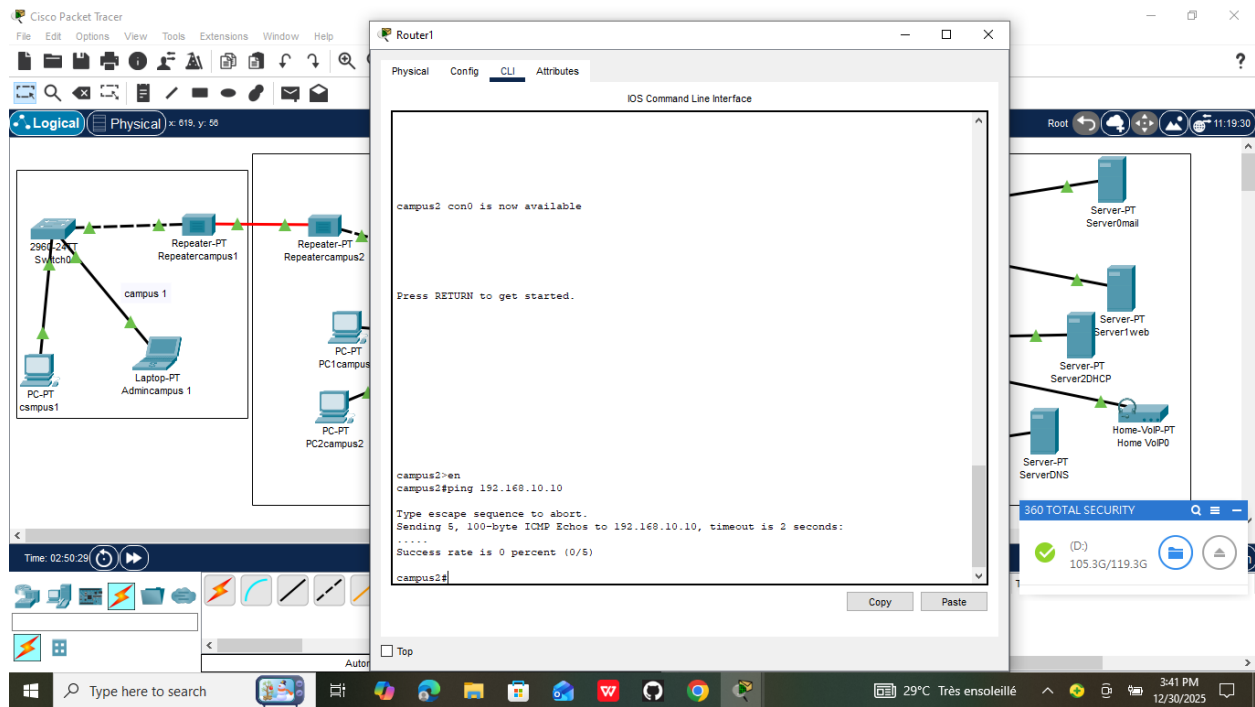

Verification sur routeur

En conclusion ce td est le debut du t9 qui aura pour but de nous permettre de passer a l'étape de la configuration physique donc ce td avait pour objectif de créer et gerer des vlans sur des switch et qui est une suite logique du td7