
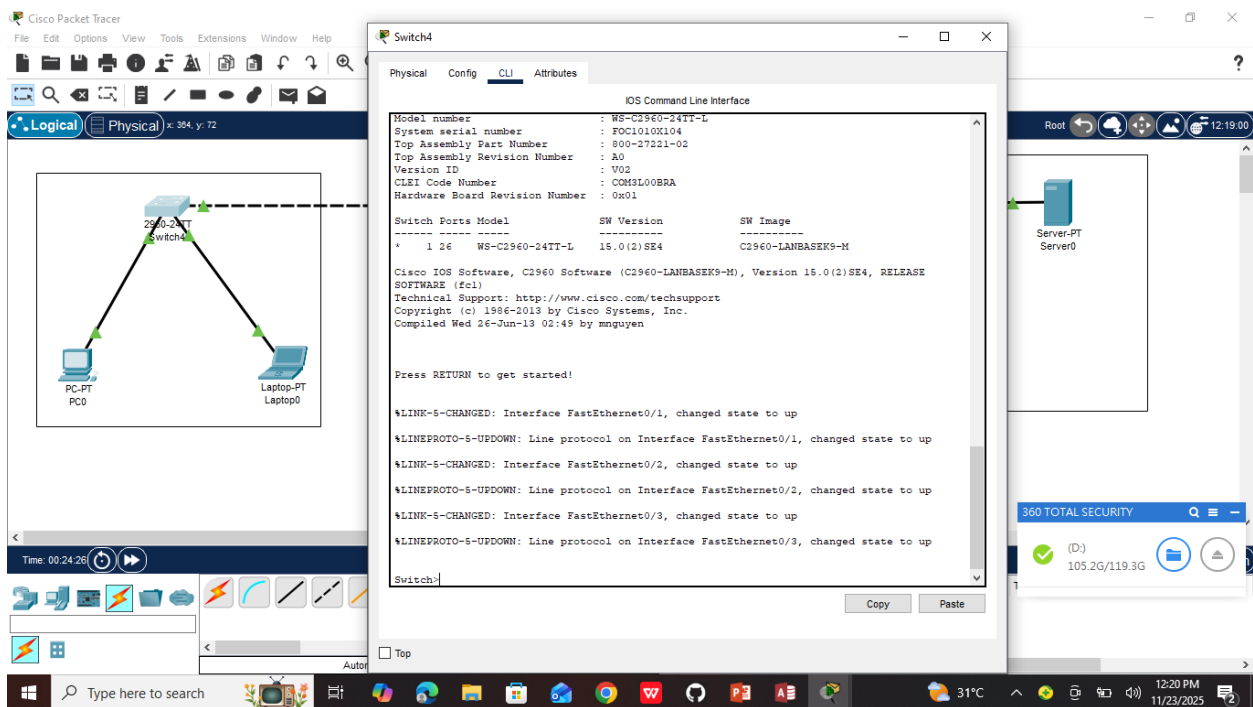


INSTITUT UNIVERSITAIRE DES SCIENCES

Faculté sciences et technologie

INNOCENT COFFY MANAHENN

L3

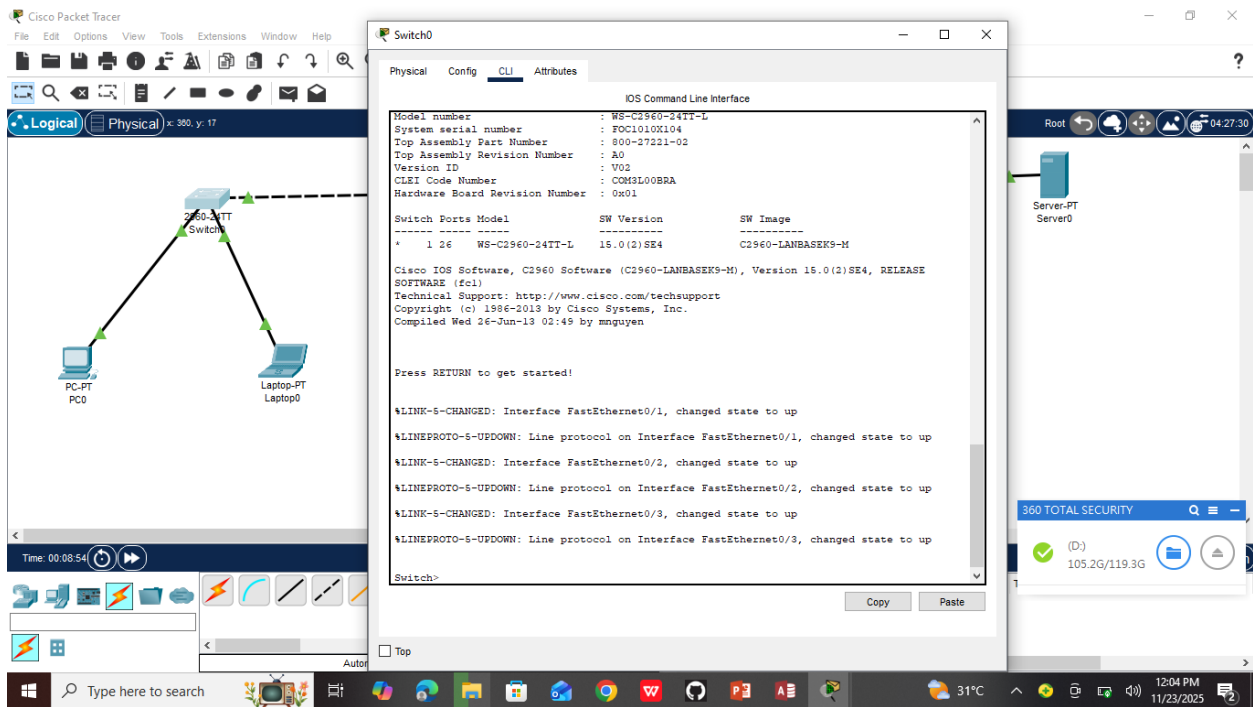

Configuration des switch

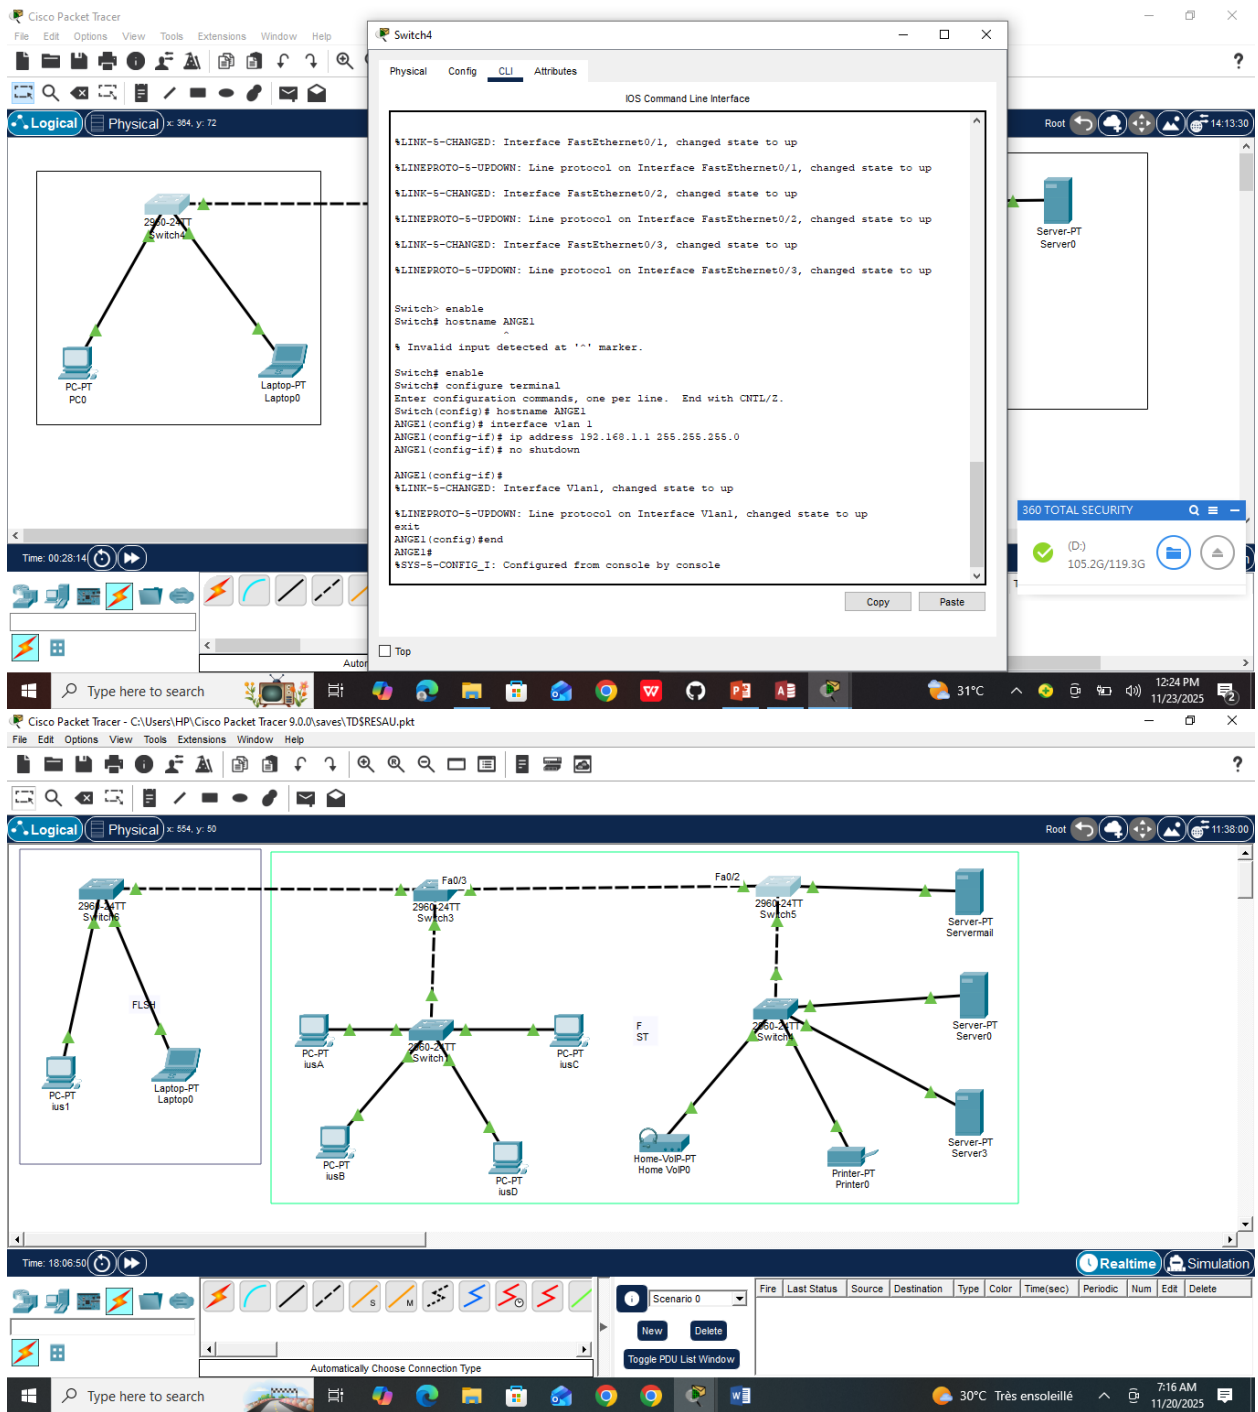


Figure 1

ius1

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.2

Pinging 192.168.1.2 with 32 bytes of data:

Reply from 192.168.1.2: bytes=32 time=31ms TTL=128
Reply from 192.168.1.2: bytes=32 time=22ms TTL=128
Reply from 192.168.1.2: bytes=32 time=1ms TTL=128
Reply from 192.168.1.2: bytes=32 time=1ms TTL=128

Ping statistics for 192.168.1.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 31ms, Average = 13ms

C:\>ping 2001:db8:1::2

Pinging 2001:db8:1::2 with 32 bytes of data:

Reply from 2001:db8:1::2: bytes=32 time<1ms TTL=128
Reply from 2001:db8:1::2: bytes=32 time<1ms TTL=128
Reply from 2001:db8:1::2: bytes=32 time<1ms TTL=128
Reply from 2001:db8:1::2: bytes=32 time<1ms TTL=128

Ping statistics for 2001:db8:1::2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.1.3

Pinging 192.168.1.3 with 32 bytes of data:

Reply from 192.168.1.3: bytes=32 time=1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time=4ms TTL=128

Ping statistics for 192.168.1.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 4ms, Average = 1ms
```

Top

Type here to search

Très humide 8:19 AM 11/20/2025

ius1

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.2

Pinging 192.168.1.2 with 32 bytes of data:

Reply from 192.168.1.2: bytes=32 time=31ms TTL=128
Reply from 192.168.1.2: bytes=32 time=22ms TTL=128
Reply from 192.168.1.2: bytes=32 time=1ms TTL=128
Reply from 192.168.1.2: bytes=32 time=1ms TTL=128

Ping statistics for 192.168.1.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 31ms, Average = 13ms

C:\>ping 2001:db8:1::2

Pinging 2001:db8:1::2 with 32 bytes of data:

Reply from 2001:db8:1::2: bytes=32 time<1ms TTL=128
Reply from 2001:db8:1::2: bytes=32 time<1ms TTL=128
Reply from 2001:db8:1::2: bytes=32 time<1ms TTL=128
Reply from 2001:db8:1::2: bytes=32 time<1ms TTL=128

Ping statistics for 2001:db8:1::2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.1.3

Pinging 192.168.1.3 with 32 bytes of data:



Reply from 192.168.1.3: bytes=32 time=1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time=4ms TTL=128

Ping statistics for 192.168.1.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 4ms, Average = 1ms
```

Top

Type here to search

Très humide 8:19 AM 11/20/2025

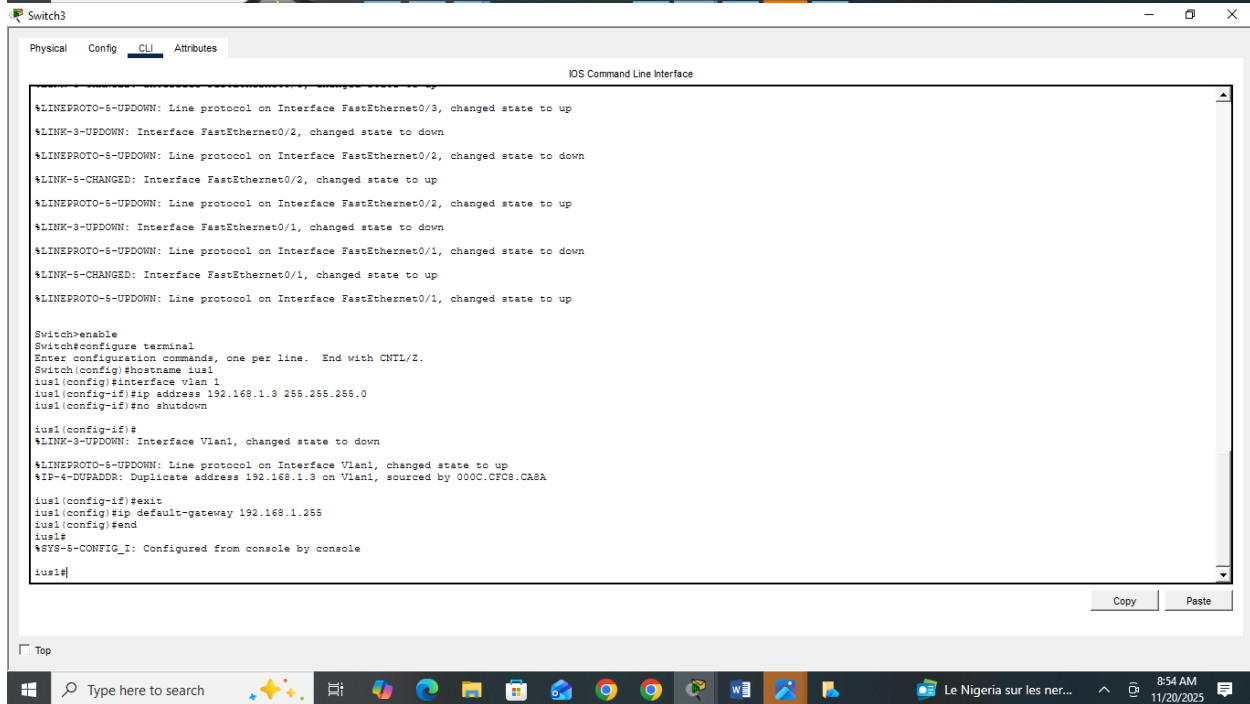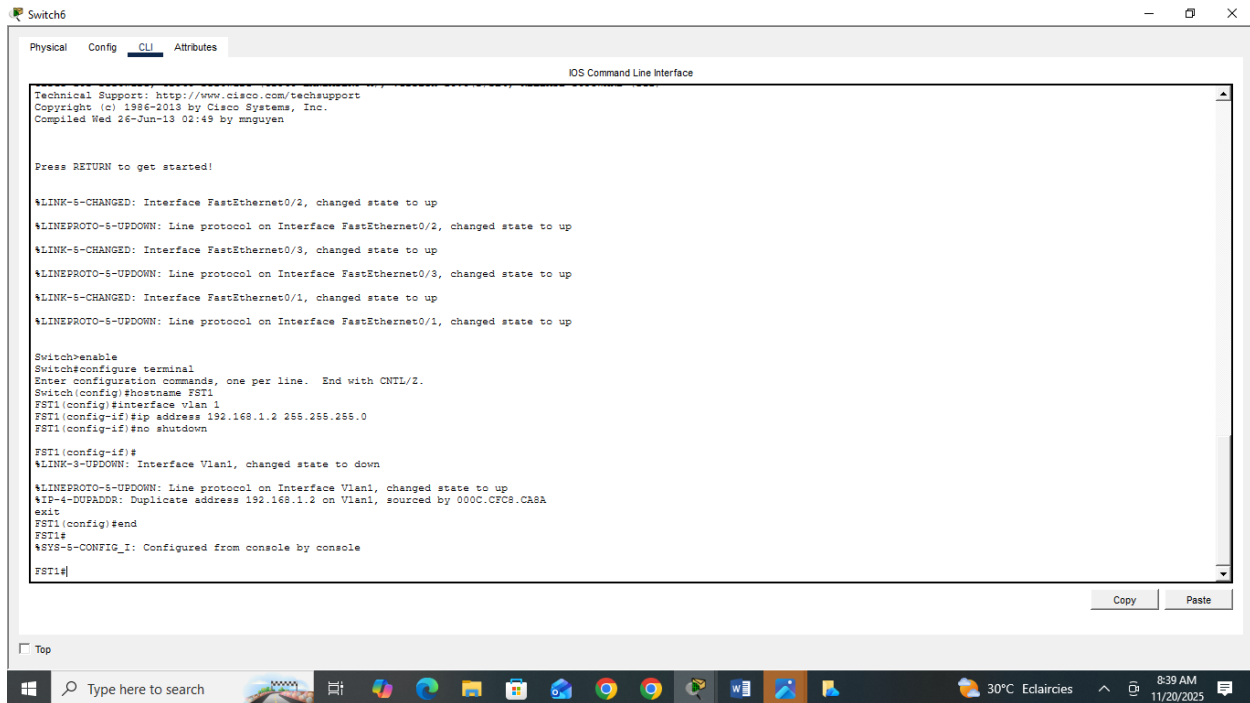

FS4

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.3

Pinging 192.168.1.3 with 32 bytes of data:

Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128
Reply from 192.168.1.3: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 2001:db8:1::3

Pinging 2001:db8:1::3 with 32 bytes of data:

Reply from 2001:DB8:1::3: bytes=32 time=44ms TTL=128
Reply from 2001:DB8:1::3: bytes=32 time<1ms TTL=128
Reply from 2001:DB8:1::3: bytes=32 time<1ms TTL=128
Reply from 2001:DB8:1::3: bytes=32 time<1ms TTL=128

Ping statistics for 2001:DB8:1::3:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 44ms, Average = 11ms

C:\>ping 192.168.1.4

Pinging 192.168.1.4 with 32 bytes of data:

Reply from 192.168.1.4: bytes=32 time<1ms TTL=128
Reply from 192.168.1.4: bytes=32 time<1ms TTL=128
Reply from 192.168.1.4: bytes=32 time<1ms TTL=128
Reply from 192.168.1.4: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

Top

Type here to search

31°C Eclaircies 9:16 AM 11/20/2025

FS4

Physical Config Desktop Programming Attributes

Command Prompt

```
C:\>ping 2001:db8:1::4

Pinging 2001:db8:1::4 with 32 bytes of data:

Reply from 2001:DB8:1::4: bytes=32 time=41ms TTL=128
Reply from 2001:DB8:1::4: bytes=32 time<1ms TTL=128
Reply from 2001:DB8:1::4: bytes=32 time<1ms TTL=128
Reply from 2001:DB8:1::4: bytes=32 time<1ms TTL=128

Ping statistics for 2001:DB8:1::4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 41ms, Average = 11ms

C:\>ping 192.168.1.5

Pinging 192.168.1.5 with 32 bytes of data:

Reply from 192.168.1.5: bytes=32 time<1ms TTL=128
Reply from 192.168.1.5: bytes=32 time<1ms TTL=128
Reply from 192.168.1.5: bytes=32 time<1ms TTL=128
Reply from 192.168.1.5: bytes=32 time=12ms TTL=128

Ping statistics for 192.168.1.5:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 12ms, Average = 3ms

C:\>ping 2001:db8:1::6

Pinging 2001:db8:1::6 with 32 bytes of data:

Reply from 2001:DB8:1::6: bytes=32 time=19ms TTL=128
Reply from 2001:DB8:1::6: bytes=32 time<1ms TTL=128
Reply from 2001:DB8:1::6: bytes=32 time<1ms TTL=128
Reply from 2001:DB8:1::6: bytes=32 time=8ms TTL=128

Ping statistics for 2001:DB8:1::6:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 19ms, Average = 7ms

C:\>ping
```

Top

Type here to search

31°C Eclaircies 9:16 AM 11/20/2025

Switch5

Physical Config CLI Attributes

IOS Command Line Interface

Press RETURN to get started!

```
%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/3, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/2, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up

Switch>enable
Switch#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#hostname belle-anse
belle-anse(config)#interface vlan 1
belle-anse(config-if)#ip address 192.168.1.255.255.0
% Invalid input detected at '^' marker.

belle-anse(config-if)#ip address 192.168.1.3 255.255.255.0
belle-anse(config-if)#no shutdown

belle-anse(config-if)#
%LINK-3-UPDOWN: Interface Vlan1, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan1, changed state to up
%IP-4-DUPADDR: Duplicate address 192.168.1.3 on Vlan1, sourced by 000C.85C3.E600
exit
belle-anse(config)#ip default-gateway 192.168.1.255
belle-anse(config)#end
belle-anse#
%SYS-5-CONFIG_I: Configured from console by console
belle-anse#
```

Copy Paste

Top

Type here to search

31°C Eclaircies 9:22 AM 11/20/2025

Switch4

Physical Config CLI Attributes

IOS Command Line Interface

```
%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/3, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/2, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/5, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/5, changed state to up
%LINK-5-CHANGED: Interface FastEthernet0/4, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/4, changed state to up

Switch>enable
Switch#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#hostname JACMEL
JACMEL(config)#interface vlan 1
JACMEL(config-if)#ip address 192.168.1.4 255.255.255.0
JACMEL(config-if)#no shutdown


JACMEL(config-if)#
%LINK-3-UPDOWN: Interface Vlan1, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan1, changed state to up
%IP-4-DUPADDR: Duplicate address 192.168.1.4 on Vlan1, sourced by 0009.7CD0.3CD9
exit
JACMEL(config)#ip default-gateway 192.168.1.255
JACMEL(config)#end
JACMEL#
%SYS-5-CONFIG_I: Configured from console by console
```


Copy Paste

Top

Type here to search

32°C Eclaircies 9:35 AM 11/20/2025

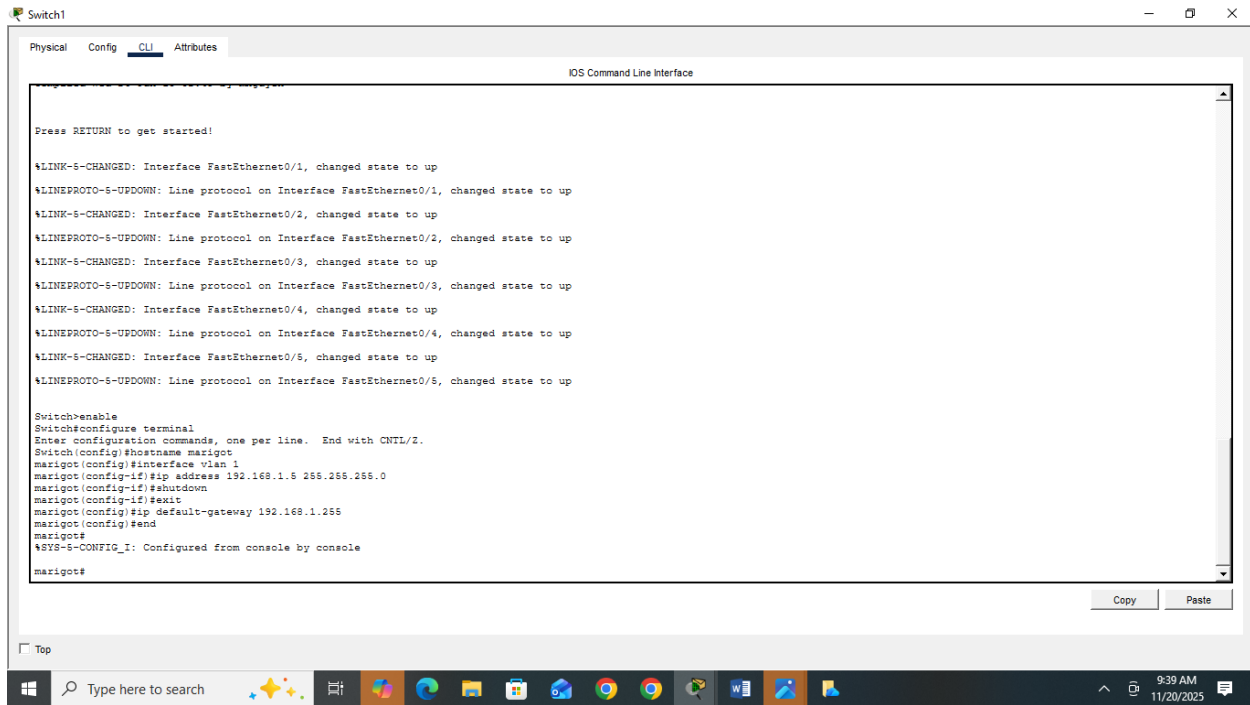

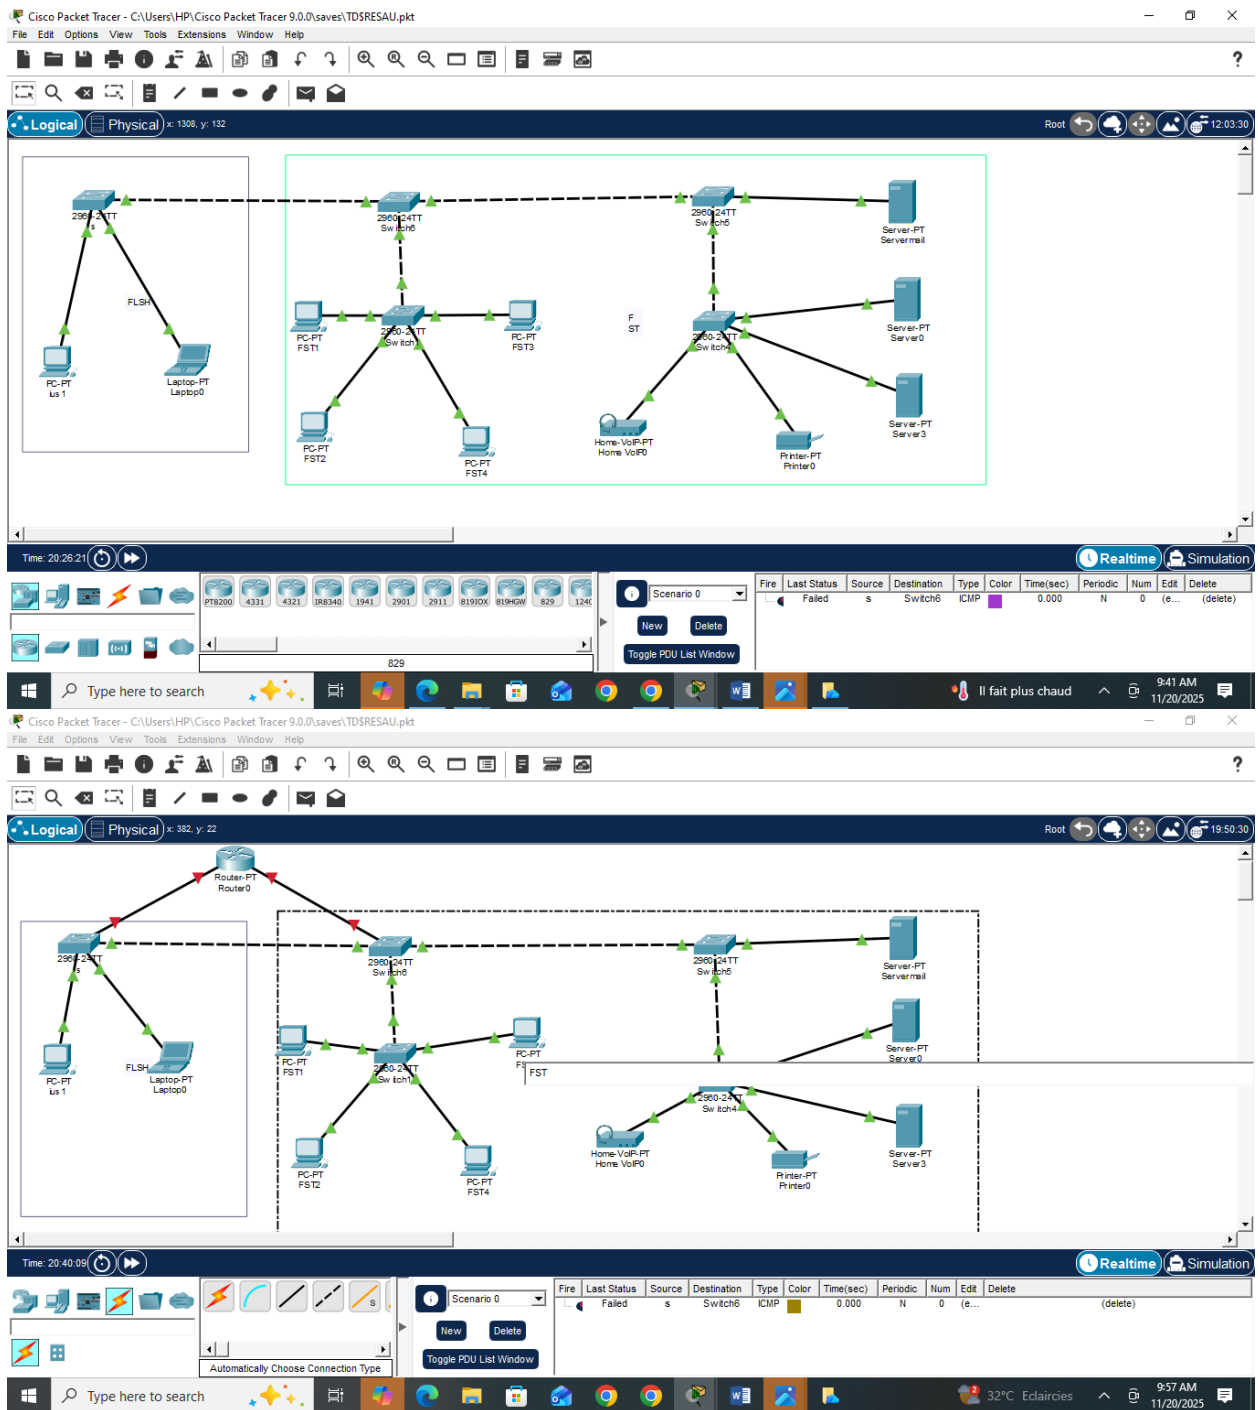

Configuration 2

Router4

Physical Config CLI Attributes

IOS Command Line Interface

```
% Please answer 'yes' or 'no'.
Would you like to enter the initial configuration dialog? [yes/no]: enable
% Please answer 'yes' or 'no'.
Would you like to enter the initial configuration dialog? [yes/no]: configure terminal
% Please answer 'yes' or 'no'.
Would you like to enter the initial configuration dialog? [yes/no]:
% Please answer 'yes' or 'no'.
Would you like to enter the initial configuration dialog? [yes/no]:
% Please answer 'yes' or 'no'.
Would you like to enter the initial configuration dialog? [yes/no]:
% Please answer 'yes' or 'no'.
Would you like to enter the initial configuration dialog? [yes/no]:
% Please answer 'yes' or 'no'.
Would you like to enter the initial configuration dialog? [yes/no]:
Press RETURN to get started!

Router>enable
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#
Router(config)#hostname router 1
% Invalid input detected at '^' marker.
Router(config)#hostname rout1
rout1(config)#interface FastEthernet0/0
rout1(config-if)#ip address 192.168.1.1 255.255.255.0
rout1(config-if)#no shutdown

rout1(config-if)#
%LINK-3-CHANGED: Interface FastEthernet0/0, changed state to up
%LINEPROTO-3-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up
exit
rout1(config)#end
rout1#
%SYS-5-CONFIG_I: Configured from console by console
```

Copy Paste

Top

Type here to search 31°C 10:22 AM 11/20/2025

Switch5

Physical Config CLI Attributes

IOS Command Line Interface

```
%LINK-3-CHANGED: Interface FastEthernet0/3, changed state to up
%LINEPROTO-3-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up
%LINK-3-CHANGED: Interface FastEthernet0/2, changed state to up
%LINEPROTO-3-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up

Switch>enable
Switch#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#hostname belle-anse
belle-anse(config)#interface vlan 1
belle-anse(config-if)#ip address 192.168.1.255.255.255.0
% Invalid input detected at '^' marker.
belle-anse(config-if)#ip address 192.168.1.3 255.255.255.0
belle-anse(config-if)#no shutdown

belle-anse(config-if)#
%LINK-3-UPDOWN: Interface Vlan1, changed state to down
%LINEPROTO-3-UPDOWN: Line protocol on Interface Vlan1, changed state to up
%IP-4-DUPADDR: Duplicate address 192.168.1.3 on Vlan1, sourced by 000C.85C3.E600
exit
belle-anse(config)#ip default-gateway 192.168.1.255
belle-anse(config)#end
belle-anse#
%SYS-5-CONFIG_I: Configured from console by console

belle-anse#
belle-anse#
belle-anse#
belle-anse#
```

Copy Paste

Top

Type here to search 31°C 10:33 AM 11/20/2025

Switch4

Physical Config CLI Attributes

IOS Command Line Interface

```
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up
%LINK-6-CHANGED: Interface FastEthernet0/3, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up
%LINK-6-CHANGED: Interface FastEthernet0/2, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up
%LINK-6-CHANGED: Interface FastEthernet0/5, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/5, changed state to up
%LINK-6-CHANGED: Interface FastEthernet0/4, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/4, changed state to up

Switch>enable
Switch#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#hostname JACMEL
JACMEL(config)#interface Vlan 1
JACMEL(config-if)#ip address 192.168.1.4 255.255.255.0
JACMEL(config-if)#no shutdown

JACMEL(config-if)#
%LINK-3-UPDOWN: Interface Vlan1, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan1, changed state to up
%IP-4-DUPADDR: Duplicate address 192.168.1.4 on Vlan1, sourced by 0009.7CD0.9CDD
exit
JACMEL(config)#ip default-gateway 192.168.1.255
JACMEL(config)#end
JACMEL#
%SYS-5-CONFIG_I: Configured from console by console
```

Copy Paste

Top

Type here to search

31°C 10:41 AM 11/20/2025

Switch1

Physical Config CLI Attributes

IOS Command Line Interface

```
Press RETURN to get started!

%LINK-6-CHANGED: Interface FastEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up
%LINK-6-CHANGED: Interface FastEthernet0/2, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up
%LINK-6-CHANGED: Interface FastEthernet0/3, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up
%LINK-6-CHANGED: Interface FastEthernet0/4, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/4, changed state to up
%LINK-6-CHANGED: Interface FastEthernet0/5, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/5, changed state to up

Switch>enable
Switch#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#hostname marigot
marigot(config)#interface Vlan 1
marigot(config-if)#ip address 192.168.1.5 255.255.255.0
marigot(config-if)#shutdown
marigot(config-if)#exit
marigot(config)#ip default-gateway 192.168.1.255
marigot(config)#end
marigot#
%SYS-5-CONFIG_I: Configured from console by console
marigot#
```

Copy Paste

Top

Type here to search

Il fai... 10:47 AM 11/20/2025

Switch0

Physical Config **CLI** Attributes

IOS Command Line Interface

```
%LINEPROTO-S-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up
%LINK-S-CHANGED: Interface FastEthernet0/3, changed state to up
%LINEPROTO-S-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up
%LINK-S-UPDOWN: Interface FastEthernet0/3, changed state to down
%LINEPROTO-S-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to down
%LINK-S-CHANGED: Interface FastEthernet0/3, changed state to up
%LINEPROTO-S-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up

Switch>enable
Switch#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#hostname scare
scare(config)#interface vlan 1
scare(config-if)#ip address 192.168.1.1 255.255.255.0
scare(config-if)#no shutdown
% Invalid input detected at '^' marker.
scare(config-if)#no shutdown
% Invalid input detected at '^' marker.
scare(config-if)#no shutdown
scare(config-if)#
%LINK-S-UPDOWN: Interface Vlan1, changed state to down
%LINEPROTO-S-UPDOWN: Line protocol on Interface Vlan1, changed state to up
exit
scare(config)#ip default-gateway 192.168.1.255
scare(config)#end
scare#
%SYS-S-CONFIG_I: Configured from console by console
```

Copy Paste

Top

Type here to search

31°C Eclaircies 12:12 PM 11/20/2025

Switch3

Physical Config **CLI** Attributes

IOS Command Line Interface

```
%LINEPROTO-S-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up
%LINK-S-CHANGED: Interface FastEthernet0/4, changed state to up
%LINEPROTO-S-UPDOWN: Line protocol on Interface FastEthernet0/4, changed state to up
%LINK-S-CHANGED: Interface FastEthernet0/5, changed state to up
%LINEPROTO-S-UPDOWN: Line protocol on Interface FastEthernet0/5, changed state to up
%LINK-S-UPDOWN: Interface FastEthernet0/5, changed state to down
%LINEPROTO-S-UPDOWN: Line protocol on Interface FastEthernet0/5, changed state to down
%LINK-S-CHANGED: Interface FastEthernet0/5, changed state to up
%LINEPROTO-S-UPDOWN: Line protocol on Interface FastEthernet0/5, changed state to up

Switch>enable
Switch#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#hostname orqa
orqa(config)#interface vlan 1
orqa(config-if)#ip address 192.168.1.3 255.255.255.0
orqa(config-if)#no shutdown
orqa(config-if)#
%LINK-S-UPDOWN: Interface Vlan1, changed state to down
%LINEPROTO-S-UPDOWN: Line protocol on Interface Vlan1, changed state to up
exit
orqa(config)#ip default-gateway 192.168.1.3.255
% Invalid input detected at '^' marker.
orqa(config)#ip default-gateway 192.168.1.255
orqa(config)#end
orqa#
%SYS-S-CONFIG_I: Configured from console by console
```

Copy Paste

Top

Type here to search

31°C Eclaircies 1:02 PM 11/20/2025

Switch7

Physical Config **CLI** Attributes

IOS Command Line Interface

```
Cisco IOS Software, C2960 Software (C2960-LANBASEK9-M), Version 15.0(2)SE4, RELEASE SOFTWARE (fc1)
Technical Support: http://www.cisco.com/techsupport
Copyright (c) 1986-2013 by Cisco Systems, Inc.
Compiled Wed 26-Jun-13 02:45 by mnguyen

Press RETURN to get started!

%LINK-3-CHANGED: Interface FastEthernet0/1, changed state to up
%LINEPROTO-3-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up
%LINK-3-CHANGED: Interface FastEthernet0/2, changed state to up
%LINEPROTO-3-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up
%LINK-3-CHANGED: Interface FastEthernet0/3, changed state to up
%LINEPROTO-3-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up

Switch>enable
Switch#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#hostname colly
colly(config)#interface vlan 1
colly(config-if)#ip address 192.168.1.2 255.255.255.0
colly(config-if)#no shutdown

colly(config-if)#
%LINK-3-UPDOWN: Interface Vlan1, changed state to down
%LINEPROTO-3-UPDOWN: Line protocol on Interface Vlan1, changed state to up
exit
colly(config)#ip default-gateway 192.168.1.255
colly(config)#end
colly#
%SYS-5-CONFIG_I: Configured from console by console
|
```

Copy Paste

Top

Type here to search

Très humide 1:08 PM 11/20/2025

Switch5

Physical Config **CLI** Attributes

IOS Command Line Interface

```
%LINEPROTO-3-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up
%LINK-3-CHANGED: Interface FastEthernet0/2, changed state to up
%LINEPROTO-3-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to up
%LINK-3-CHANGED: Interface FastEthernet0/3, changed state to up
%LINEPROTO-3-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to up
%LINK-3-CHANGED: Interface FastEthernet0/4, changed state to up
%LINEPROTO-3-UPDOWN: Line protocol on Interface FastEthernet0/4, changed state to up

Switch>enable
Switch#configure terminal
^
% Invalid input detected at '^' marker.

Switch#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#hostname berlain
berlain(config)#interface vlan 1
berlain(config-if)#ip address 192.168.1.4 255.255.255.0
berlain(config-if)#no shutdown

berlain(config-if)#
%LINK-3-UPDOWN: Interface Vlan1, changed state to down
%LINEPROTO-3-UPDOWN: Line protocol on Interface Vlan1, changed state to up
exit
berlain(config)#ip default-gateway 192.168.1.255

% Invalid input detected at '^' marker.


berlain(config)#ip default-gateway 192.168.1.255
berlain(config)#end
berlain#
%SYS-5-CONFIG_I: Configured from console by console
```

Copy Paste

Top

Type here to search

31°C Eclaircies 1:15 PM 11/20/2025

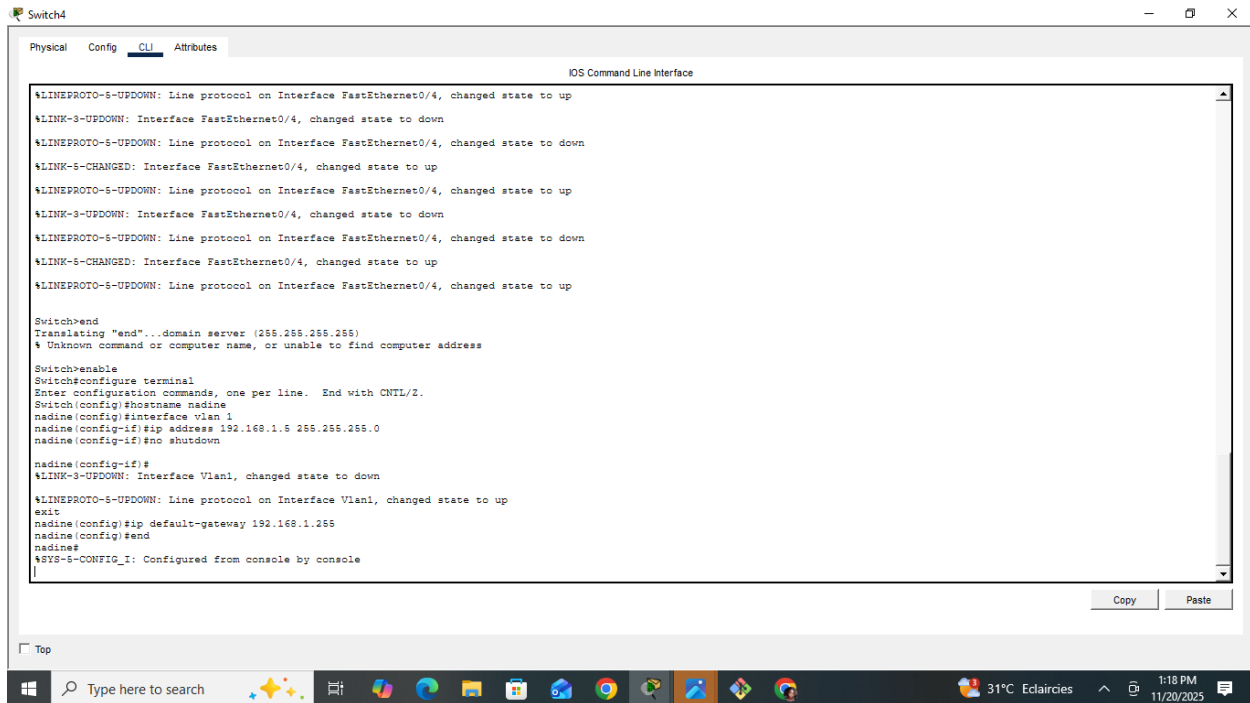

```
Switch4
Physical Config CLI Attributes
IOS Command Line Interface

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/4, changed state to up
%LINK-3-UPDOWN: Interface FastEthernet0/4, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/4, changed state to down
%LINK-5-CHANGED: Interface FastEthernet0/4, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/4, changed state to up
%LINK-3-UPDOWN: Interface FastEthernet0/4, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/4, changed state to down
%LINK-5-CHANGED: Interface FastEthernet0/4, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/4, changed state to up

Switch>end
Translating "end"...domain server (255.255.255.255)
% Unknown command or computer name, or unable to find computer address

Switch>enable
Switch#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#hostname nadine
nadine(config)#interface vlan 1
nadine(config-if)#ip address 192.168.1.5 255.255.255.0
nadine(config-if)#no shutdown

nadine(config-if)#
%LINK-3-UPDOWN: Interface Vlan1, changed state to down
%LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan1, changed state to up
exit
nadine(config)#ip default-gateway 192.168.1.255
nadine(config)#end
nadine#
%SYS-5-CONFIG_I: Configured from console by console
|
```

En conclusion plus j'avance avec le cours plus je comprends la complexité d'un réseau informatique de la configuration des switches à celle des PC je peux dire il y a là tout un monde artistique rendant de plus en plus magnifique l'apprentissage de l'informatique