



Batteries



Passenger Vehicles Range



PASSENGER VEHICLES RANGE

Exide has developed a range of Passenger Vehicle batteries that suits every application and any customer budget. The evolution of the complex Australasian car parc has been a key consideration of the design. Exide delivers a solution that accommodates different vehicle and consumer needs including electrical load complexity, warranty requirements and maintenance preferences.

Exide Batteries has a commitment to “Power the Future” through the delivery of Enhanced performance, Extreme product life and Ultimate value to its customers.

Modern motor vehicles demand a significant increase in electrical supply, compared to previous generations of passenger vehicle technology. With this in mind, Exide has developed batteries that provide a totally balanced performance philosophy. As part of the approach the cold cranking amps (CCA), reserved capacity (RC) and amp hours (AH) ratings have all been considered equally important to meet modern motor vehicle requirements and provide total battery performance.

The addition of Ap9 technology to the Exide range of products helps support the mechanical properties of rolled expanded grids, whereas the traditional silver additive has proven to have no impact. In extreme conditions, grid corrosion is limited by the addition of Ap9 and by a low calcium content. Additionally, when batteries endure long term storage and overcharging at high temperatures, battery life is increased with the addition of Ap9 no matter what the technology. Ap9 improves the battery recharge ability after a discharge. Additionally, our top quality Exide Extreme range of Passenger batteries has been further enhanced with a new technology additive we call 2xT. The 2xT additive is combined with other active material components to achieve the necessary formulation to improve durability and reliability. 2xT technology in the Extreme range will deliver longer life, hence the backing of extended warranty. This is the top consideration of consumers when purchasing a battery.




PASSENGER VEHICLES *Extreme*

Features

- Sealed maintenance free product technology
- Exceeds original equipment specifications
- Ap9 Additive
- 2xT additive
- Total balanced performance
- Up to 42 month warranty available

Benefits

- Safe and no maintenance required
- Better performance, better durability
- Provides longer battery life
- Increased performance and life expectancy
- Extreme durability under all conditions
- Provides increased value and peace of mind

PRODUCT CATEGORY	BATTERY TYPE	V	TECHNOLOGY	CCA	RC	AH	DIMENSION (MM)			WET WEIGHT (KG)	ASSEMBLY	POST TYPE	VENT	LEDGE	HYDRO	BASE WARRANTY (MONTHS)	EXTENDED WARRANTY (MONTHS)
							L	W	H								
	PASSENGER VEHICLES RANGE EXTREME																
	X40CMF	12	SMF CAL	400	65	44	196	128	219	10.8	C	STD	TS	NL	YES	36	42
	X40CPMF	12	SMF CAL	400	65	44	196	128	219	10.8	C	PT	TS	NL	YES	36	42
	X40DMF	12	SMF CAL	400	65	44	196	128	219	10.8	D	STD	TS	NL	YES	36	42
	X40DPMF	12	SMF CAL	400	65	44	196	128	219	10.8	D	PT	TS	NL	YES	36	42
	X43MF	12	SMF CAL	410	60	44	238	138	212	12.8	H	DFP	TS	EL	YES	36	42
	X50D20LMF	12	SMF CAL	460	80	50	200	174	221	14.4	C	SAE	TS	FL	YES	36	42
	X55D23CMF	12	SMF CAL	650	120	65	233	173	222	16.0	C	STD	TS	FL	YES	36	42
	X55D23DMF	12	SMF CAL	650	120	65	233	173	222	16.0	D	STD	TS	FL	YES	36	42
	X56CMF	12	SMF CAL	630	115	63	232	171	203	16.0	C	STD	TS	EL & FL	YES	36	42
	X56DMF	12	SMF CAL	630	115	63	228	168	203	16.0	D	STD	TS	FL	YES	36	42
	X60CMF	12	SMF CAL	480	80	50	236	128	221	13.4	C	STD	TS	NL	YES	36	42

PRODUCT CATEGORY	BATTERY TYPE	V	TECHNOLOGY	CCA	RC	AH	DIMENSION (MM)			WET WEIGHT (KG)	ASSEMBLY	POST TYPE	VENT	LEDGE	HYDRO	BASE WARRANTY (MONTHS)	EXTENDED WARRANTY (MONTHS)
							L	W	H								
	X60CPMF	12	SMF CAL	480	80	50	236	128	221	13.4	C	PT	TS	NL	YES	36	42
	X60DMF	12	SMF CAL	480	80	50	236	128	221	13.4	D	STD	TS	NL	YES	36	42
	X60DPMF	12	SMF CAL	480	80	50	236	128	221	13.4	D	PT	TS	NL	YES	36	42
EUROPEAN AUTOMOTIVE																	
	XDIN44MF	12	SMF CAL	510	75	50	214	175	175	12.7	C	STD	TS	EL & FL	YES	36	42
	XDIN44HMF	12	SMF CAL	420	72	45	214	175	190	12.3	C	STD	TS	F&EL	YES	36	42
	XDIN55MF	12	SMF CAL	600	105	60	242	175	175	14.8	C	STD	TS	EL & FL	YES	36	42
	XDIN55DMF	12	SMF CAL	600	105	60	242	175	175	14.3	D	STD	TS	EL & FL	YES	36	42
	XDIN55HMF	12	SMF CAL	600	115	65	242	175	190	15.4	C	STD	TS	F&EL	YES	36	42
	XDIN66MF	12	SMF CAL	700	130	70	277	175	175	17.0	C	STD	TS	EL & FL	YES	36	42
	XDIN66DMF	12	SMF CAL	730	130	70	277	175	175	17.1	D	STD	TS	EL & FL	YES	36	42
	XDIN66HMF	12	SMF CAL	750	155	80	277	175	190	19.0	C	STD	TS	F&EL	YES	36	42
	XDIN66HDMF	12	SMF CAL	750	155	80	277	175	190	19.0	D	STD	TS	F&EL	YES	36	42
	XDIN77MF	12	SMF CAL	750	140	80	315	175	175	20.5	C	STD	TS	EL & FL	YES	36	42
	XDIN77HMF	12	SMF CAL	780	145	85	315	175	190	21.9	C	STD	TS	EL & FL	YES	36	42
	XDIN77HDXMF	12	SMF CAL	915	165	95	315	175	190	21.1	D	STD	TS	EL & FL	YES	30	36
	XDIN88MF	12	SMF CAL	810	160	90	351	175	175	22.1	C	STD	TS	EL & FL	YES	36	42
	XDIN88HMF	12	SMF CAL	900	160	90	351	175	190	24.1	C	STD	TS	EL & FL	YES	30	36
US AUTOMOTIVE																	
	X58CMF	12	SMF CAL	540	90	50	250	182	175	13.1	C	STD	TS	FL	YES	36	42
	X58DMF	12	SMF CAL	540	90	50	250	182	175	13.1	D	STD	TS	FL	YES	36	42
	X65DMF	12	SMF CAL	780	140	75	286	189	192	18.9	D	STD	TS	FL	YES	30	36
	X78DT-60MF	12	SMF CAL	760	120	70	258	171	204	19.8	D	DT	TS	FL	YES	30	36




PASSENGER VEHICLES Endurance

Features

- Sealed maintenance free product technology
- Meets original equipment specifications
- Ap9 Additive
- Total balanced performance
- Up to 30 month warranty available
- Integrated carry handle

Benefits

- Safe and no maintenance required
- Genuine match for the vehicle technology
- Provides longer battery life
- Durability under all conditions
- Provides increased value and peace of mind
- Allows for easy installation and handling

PRODUCT CATEGORY	BATTERY TYPE	V	TECHNOLOGY	CCA	RC	AH	DIMENSION (MM)			WET WEIGHT (KG)	ASSEMBLY	POST TYPE	VENT	LEDGE	HYDRO	BASE WARRANTY (MONTHS)	EXTENDED WARRANTY (MONTHS)
							L	W	H								
	PASSENGER VEHICLES RANGE ENDURANCE																
	40CMF	12	SMF CAL	350	60	40	196	128	219	10.3	C	STD	TS	NL	NO	24	30
	40CPMF	12	SMF CAL	350	60	40	196	128	219	10.3	C	PT	TS	NL	NO	24	30
	52DMF	12	SMF CAL	580	100	60	233	171	203	15.6	D	STD	TS	EL &FL	NO	24	30
	53CMF	12	SMF CAL	580	100	60	233	171	208	15.5	C	DFP	TS	EL &FL	NO	24	30
	54CMF	12	SMF CAL	580	100	60	233	171	203	15.6	C	STD	TS	EL &FL	NO	24	30
	55D23CMF	12	SMF CAL	600	105	60	233	173	222	16.2	C	STD	TS	FL	NO	24	30
	55D23DMF	12	SMF CAL	600	105	60	233	173	222	16.2	D	STD	TS	FL	NO	24	30
	60CMF	12	SMF CAL	370	60	40	236	128	221	12.0	C	STD	TS	NL	NO	24	30
	60CPMF	12	SMF CAL	370	60	40	236	128	221	12.0	C	PT	TS	NL	NO	24	30
	60DMF	12	SMF CAL	370	60	40	236	128	221	12.0	D	STD	TS	NL	NO	24	30
60DPMF	12	SMF CAL	370	60	40	236	128	221	12.0	D	PT	TS	NL	NO	24	30	
	EUROPEAN AUTOMOTIVE																
	DIN55MF	12	SMF CAL	550	100	55	242	175	175	14.8	C	STD	TS	EL &FL	NO	24	30
	DIN66MF	12	SMF CAL	650	120	66	277	175	175	17.0	C	STD	TS	EL &FL	NO	24	30
	DIN66HMF	12	SMF CAL	720	140	80	277	175	190	19.7	C	STD	TS	S&EL	NO	24	30
	DIN88MF	12	SMF CAL	810	160	90	351	175	175	21.3	C	STD	TS	EL &FL	NO	24	30

PASSENGER VEHICLES *Enforcer*




Features

- Maintenance free technology
- Suitable for modern vehicles
- Up to 24 month warranty available
- Integrated carry handle

Benefits


- Safe and no maintenance required
- Reliable starting performance
- Provides peace of mind
- Allows for easy installation and handling

PRODUCT CATEGORY	BATTERY TYPE	V	TECHNOLOGY	CCA	RC	AH	DIMENSION (MM)			WET WEIGHT (KG)	ASSEMBLY	POST TYPE	VENT	LEDGE	HYDRO	BASE WARRANTY (MONTHS)	EXTENDED WARRANTY (MONTHS)
							L	W	H								
	PASSENGER VEHICLES RANGE I ENFORCER																
	ENS40ZALMF	12	SMF CAL	300	48	30	196	128	219	8.9	C	STD	TS	NL	YES	18	24
	ENS40ZLMF	12	SMF CAL	300	48	30	196	128	219	8.8	C	PT	TS	NL	YES	18	24
	ENS50PLMF	12	SMF CAL	480	75	40	237	171	208	14.7	C	DFP	TS	EL &FL	YES	18	24
	ENS50PMF	12	SMF CAL	480	75	40	237	171	203	14.6	D	STD	TS	EL &FL	YES	18	24
	EN55D23LMF	12	SMF CAL	500	85	45	233	173	222	15.3	C	STD	TS	FL	YES	18	24
	EN55D23RMF	12	SMF CAL	500	85	45	233	173	222	15.3	D	STD	TS	FL	YES	18	24
	EUROPEAN AUTOMOTIVE																
	EN55MF	12	SMF CAL	490	85	45	242	175	175	13.0	C	STD	TS	EL &FL	YES	18	24
	EN66MF	12	SMF CAL	610	105	60	277	175	175	15.6	C	STD	TS	EL &FL	YES	18	24


ABBREVIATIONS & BATTERY ASSEMBLIES

ACC	Accessible	OLT	Offset Lug Terminal
CV	Central Venting	PT	Pencil Terminal
DFA	Dual Fit Aligned Terminals	RPH	Rope Handles
DFP	Dual Fit Parallel Terminals	RT	Recessed Terminal
DST	Dual System Terminals	RTH	Retractable Handles
EL	End Ledge	ST	Side Terminal
FDH	Fold Down Handles	STD	Standard Terminal
FL	Front Ledge	TM	Twin Marine Terminal - Type M
HE	Hydrometer Eye	TS	Top Stud Terminal

BATTERY ASSEMBLIES



6 VOLT

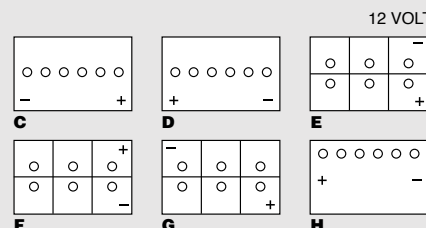

12 VOLT

Free Extended Warranty

Nationwide Convenience

Exide products come with a Free Extended Warranty Offer which not only rewards you with unprecedented peace of mind but most importantly, it will send you an alert when your battery is due for replacement.

There are two ways you can register your FREE EXTENDED WARRANTY

1. Look for our Quick Response Code (QR Code) on the top of the battery label. Scanning this QR Code via a compatible Smart Phone takes you to the registration page.
2. If you don't have a Smart Phone, you can record the critical details of the battery and your vehicle, then go online and register at mplbatteries.com/xwarranty. Alternatively, you can call us on our toll free number and we will do it for you.

Warranty terms and conditions are displayed on the top of the battery. To ensure optimal life of the battery, always keep your battery fully charged after use, particularly after prolonged discharge - batteries left discharged for any prolonged period of time will suffer from sulphuration which is unrecoverable causing premature failure.

