

ALCOTM
BATTERIES



TRUCK & INDUSTRIAL RANGE

TRUCK & INDUSTRIAL RANGE

ADVANCED TECHNOLOGY COMMERCIAL BATTERY RANGE

The ALCO Batteries Truck and Industrial range represents the very best in starting battery technology. All of our products are maintenance free and engineered to provide stable power and excellent longevity.

The ALCO 2000 range is built for maximum flow of current, the advanced grid design enables faster recharge acceptance and optimal conductivity. X-Frame™ technology employs a full framed grid design which prevents grid growth, maximising the life of the battery. Plate durability is increased by using non-woven tissue which reduces the loss of active material. A sealed double lid, advanced centre lug technology and rugged construction ensure long lasting reliability.

Rely on Your Battery Specialists to provide you with the perfect product for Australia's demanding driving conditions.



ALCO 2000 BATTERY STRUCTURE

- 1 X-Frame Grid Technology and Grid Protection Technology
- 2 Enveloped separator for low electric resistance
- 3 Advanced centre lug technology and cast-on strap
- 4 Sealed double lid with flame arrestor
- 5 Integrated, computer-designed and reinforced container
- 6 Magic Eye Indicator (Conveniently displays state of charge)





ALCO 2000

BATTERY TYPE	VOLT	TECHNOLOGY	AH	RC	CCA	OVERALL DIMENSION (MM)				WET WEIGHT (KG)	ASSEMBLY	POST	LEDGE	HYDRO	WARRANTY (MONTHS)
						L	W	H	TH						
4WD/SUV/TRUCK AND INDUSTRIAL APPLICATION															
MF90D26R	12	SMF Ca/Ca	75	130	620	257	172	200	220	17.0	D	STD	FL	YES	24
MF90D26L	12	SMF Ca/Ca	75	130	620	257	172	200	220	17.0	C	STD	FL	YES	24
MF105D31R	12	SMF Ca/Ca	90	155	750	302	172	200	220	20.1	D	STD	FL	YES	24
MF105D31L	12	SMF Ca/Ca	90	155	750	302	172	200	220	20.1	C	STD	FL	YES	24
U1RMF-X	12	SMF Ca/Ca	30	40	300	205	132	160	185	7.7	C	OLT	NL	YES	12
U1MF-X	12	SMF Ca/Ca	30	40	300	205	132	160	185	7.7	D	OLT	NL	YES	12
COMMERCIAL															
A31-800	12	Hybrid Sb/Ca	90	185	810	330	172	215	236	24.3	H	STD	NL	NO	12
MF31-1000	12	SMF Ca/Ca	105	190	1000	330	172	218	242	25.2	H	TOP/STD	NL	YES	12
MF31S-1000	12	SMF Ca/Ca	105	190	1000	330	172	218	242	25.1	H	STUD	NL	YES	12
ABXN94	12	Main Ca	135	255	890	519	206	181	203	35.0	E	STD	NL	NO	12
MF95E41L	12	SMF Ca/Ca	97	200	815	405	173	211	232	27.0	C	STD	NL	YES	12
MF95E41R	12	SMF Ca/Ca	97	200	815	405	173	211	232	27.0	D	STD	NL	YES	12
MF64589	12	SMF Ca/Ca	120	200	930	511	188	195	217	36.6	E	STD	NL	YES	12
MF68032	12	SMF Ca/Ca	150	300	1030	511	222	195	217	45.7	E	STD	NL	YES	12
MF72512	12	SMF Ca/Ca	200	400	1200	516	274	216	238	59.4	E	STD	NL	YES	12
MF64589R	12	SMF Ca/Ca	120	200	930	511	188	195	217	36.6	F	STD	NL	YES	12
MF68032R	12	SMF Ca/Ca	150	300	1030	511	222	195	217	45.7	F	STD	NL	YES	12
MF72512R	12	SMF Ca/Ca	200	400	1200	516	274	216	238	59.4	F	STD	NL	YES	12


ALCO 1000

BATTERY TYPE	VOLT	TECHNOLOGY	AH	RC	CCA	OVERALL DIMENSION (MM)				WET WEIGHT (KG)	ASSEMBLY	POST	LEDGE	HYDRO	WARRANTY (MONTHS)
						L	W	H	TH						
4WD/SUV/TRUCK AND INDUSTRIAL APPLICATION															
MF55D26R	12	SMF Ca/Ca	51	95	500	259	173	202	223	16.0	D	STD	FL	YES	12
MF55D26L	12	SMF Ca/Ca	51	95	500	259	173	202	223	16.0	C	STD	FL	YES	12
MF75D31R	12	SMF Ca/Ca	68	130	600	304	173	203	224	19.4	D	STD	FL	YES	12
MF75D31L	12	SMF Ca/Ca	68	130	600	304	173	203	224	19.4	C	STD	FL	YES	12
12N24-3	12	Main Ca	27	35	250	184	125	160	174	8.1	C	FT	NL	NO	12
12N24-4	12	Main Ca	27	35	250	184	125	160	174	8.1	D	FT	NL	NO	12

ABBREVIATIONS

DF	Dual Fit
EL	End Ledge
FL	Front Ledge
NL	No Ledge
OLT	Offset Lug Terminal
FT	Flag Terminal
STD	Standard Terminal

BATTERY ASSEMBLIES

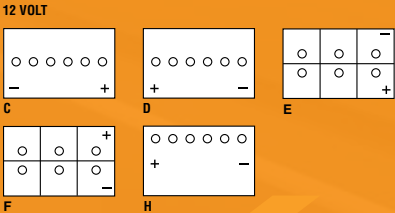

ALCO
BATTERIES



SALES & SUPPORT

At ALCO Batteries we strive to partner with you in driving success for your business. The ALCO Batteries Connect Sales & Support Centre is available to answer any query you may have. In addition to our local team members, the ALCO Batteries Connect team can assist with all sales orders, used battery collections and product/technical inquiries.

Timely and accurate deliveries are critical in providing the best service to you customers. The team can work through the product range with you to deliver an optimal sales experience. Combining the functions of our local team members and ALCO Batteries Connect ensure you get the right product for your customer when you need it!

WARRANTY TERMS & CONDITIONS

At ALCO Batteries we are committed to total customer satisfaction by providing quality products and quality service at all times. Our batteries are warranted against any manufacturing fault for the stated period.

Warranty terms and conditions appear within this warranty card and also on the top label of your battery.

Possible causes of battery failure that are not the result of faulty manufacture:

- Incorrect or under-specified battery type fitted to car.
- Charge system problem (low or high voltage) creating an overcharge or under-charge situation. A low voltage causes the battery to sulphate whilst a high voltage will literally cook the internal components of the battery.
- Repeated deep discharge (heavy accessory loads, car phones, lighting, boat accessories, etc).
- Prolonged storage of the car or very minimal use. A battery will generally sulphate and will never recover its full state of charge.
- Electrical faults, Shorts, Excessive loads etc.
- Any battery modifications such as acid additives, lead terminal changes, or any other contaminates.
- Damage to the battery caused by the consumer or other in-car fault.

USED BATTERY COLLECTIONS

As legislation addresses the processes surrounding used batteries, ALCO Batteries ensures safe, prompt and legal transportation of used batteries. Lead based batteries are processed in our own Australian EPA compliant recycling facility. Our team are ready to book your collections today.



Recycle with Enirgi
1300 783 879 | enirgipower.com.au

For sales enquiries,
call us on

1300 ALC088

- Australia's only full lifecycle battery partner with over 12,000 collection points
- World-class, modern facility in New South Wales recycles 97% of a used lead acid battery
- Largest nationally compliant used battery recycling program
- Australia's only ISO14001 Environmental sustainability accredited recycling facility