

# Lake Okeechobee System Operating Manual

## Iteration 3 - Phase 2 Batch Analysis

*Sanibel-Captiva Conservation Foundation*

*Conservancy of Southwest Florida*


**DRAFT** - October 22, 2021  
(Updated: October 28, 2021 )




Use cursor keys for navigation, press "O" for a slide Overview

[Download PDF Version](#)


## Evaluation of model runs presented to PDT by USACE 2021-10-26

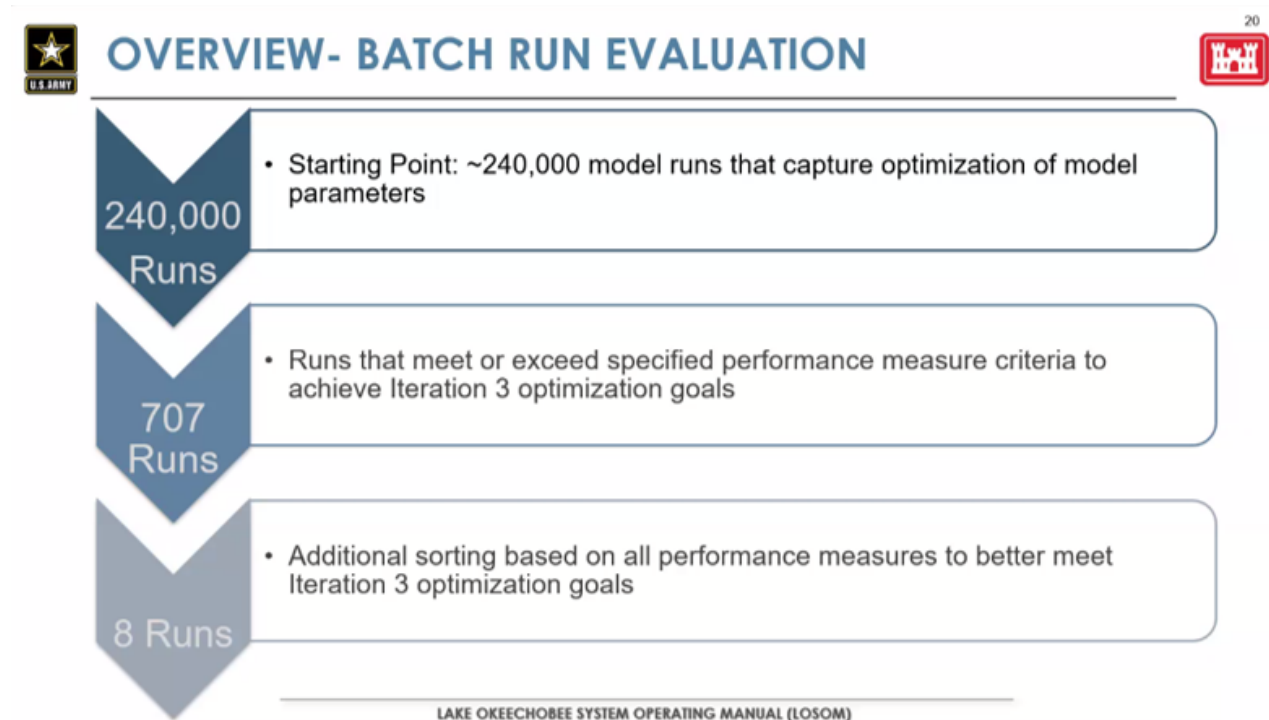


# Iteration 3 - Phase 2

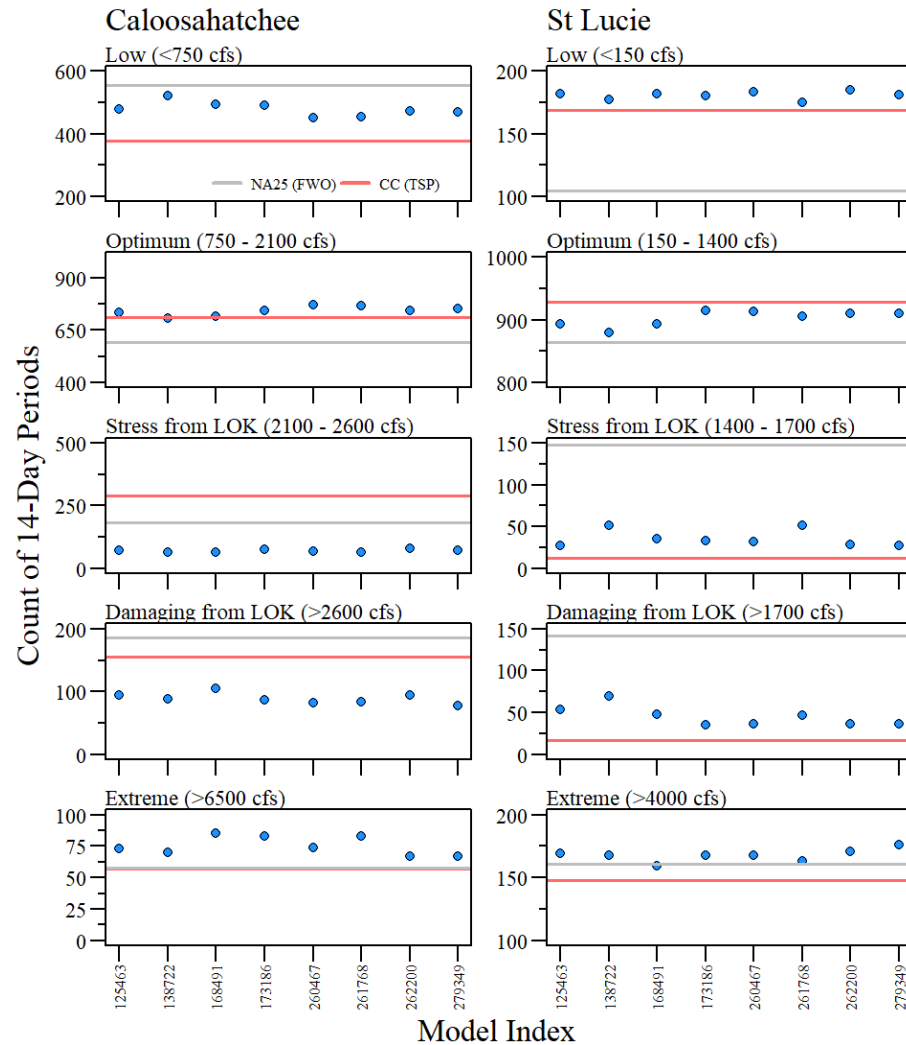


# Iteration 3 - Phase 2

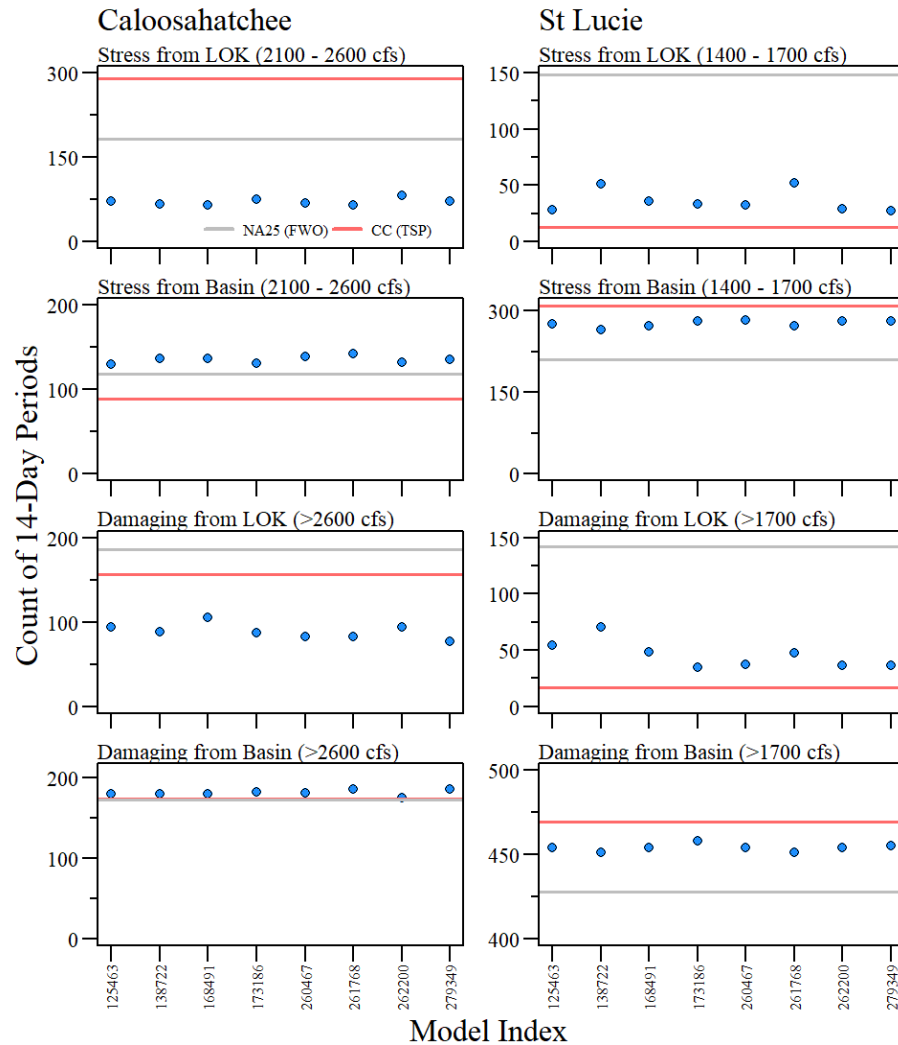


## Iteration 3 - Phase 2

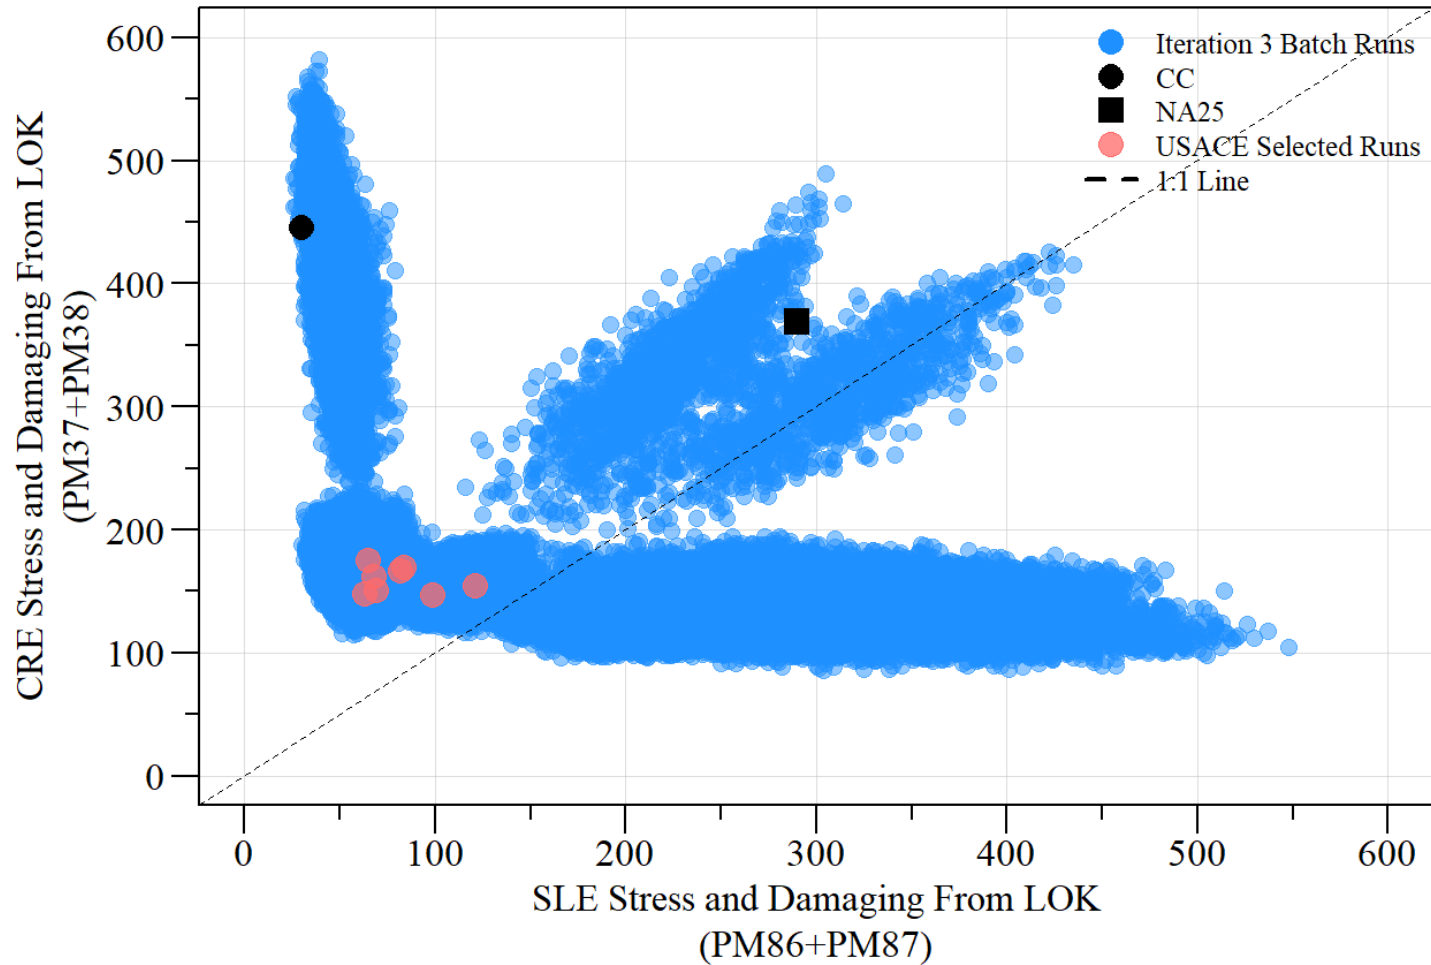


## Iteration 3 - Phase 2

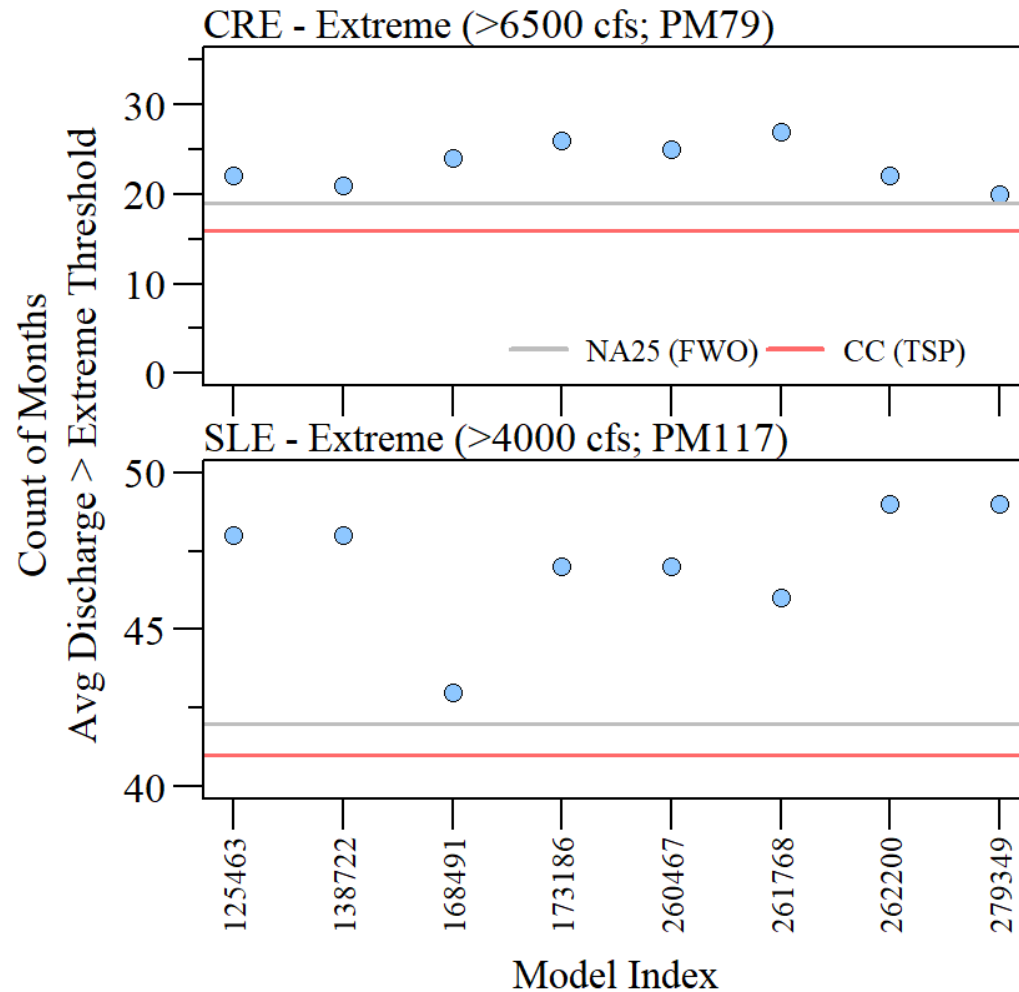

## Iteration 3 - Phase 2

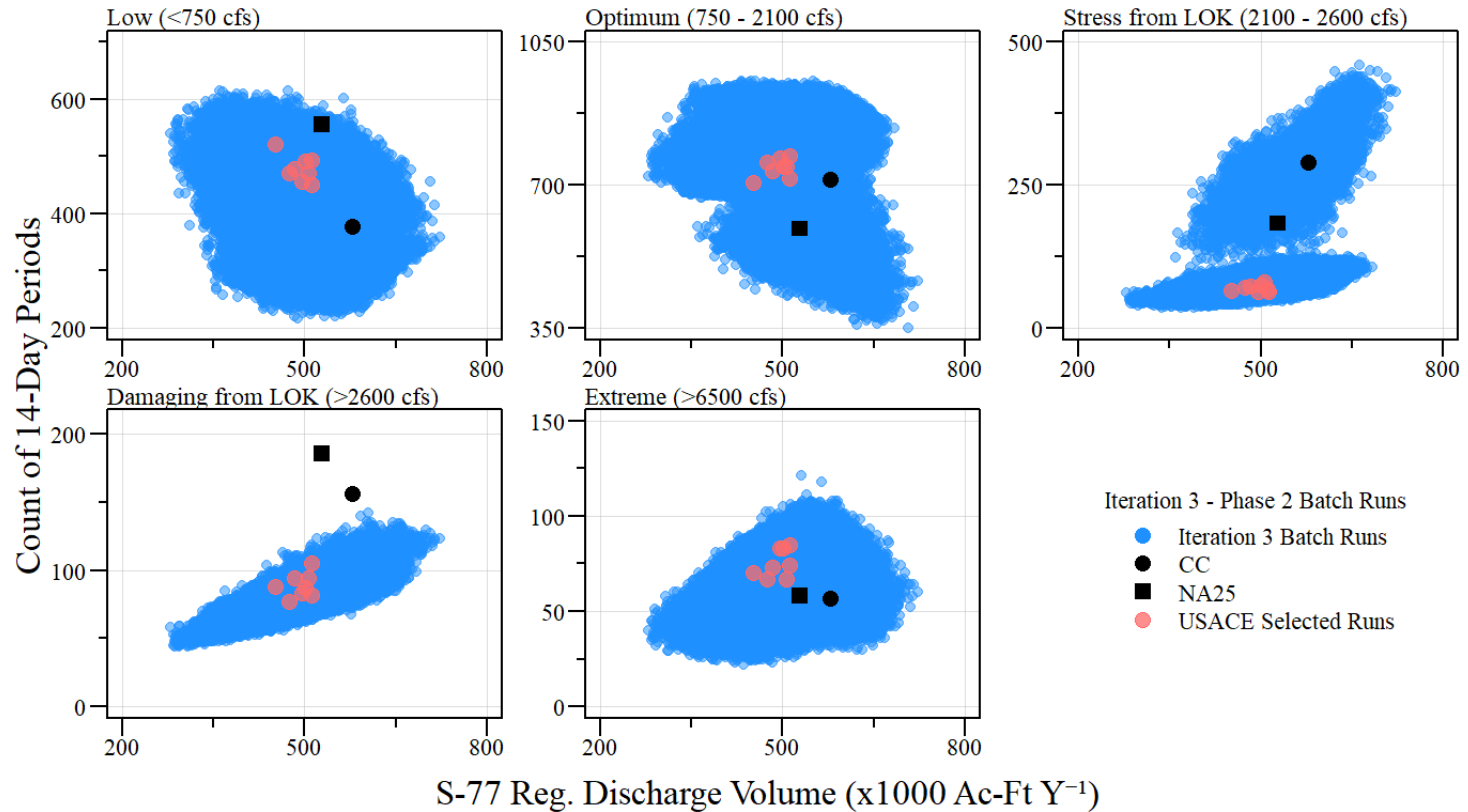


## Iteration 3 - Phase 2

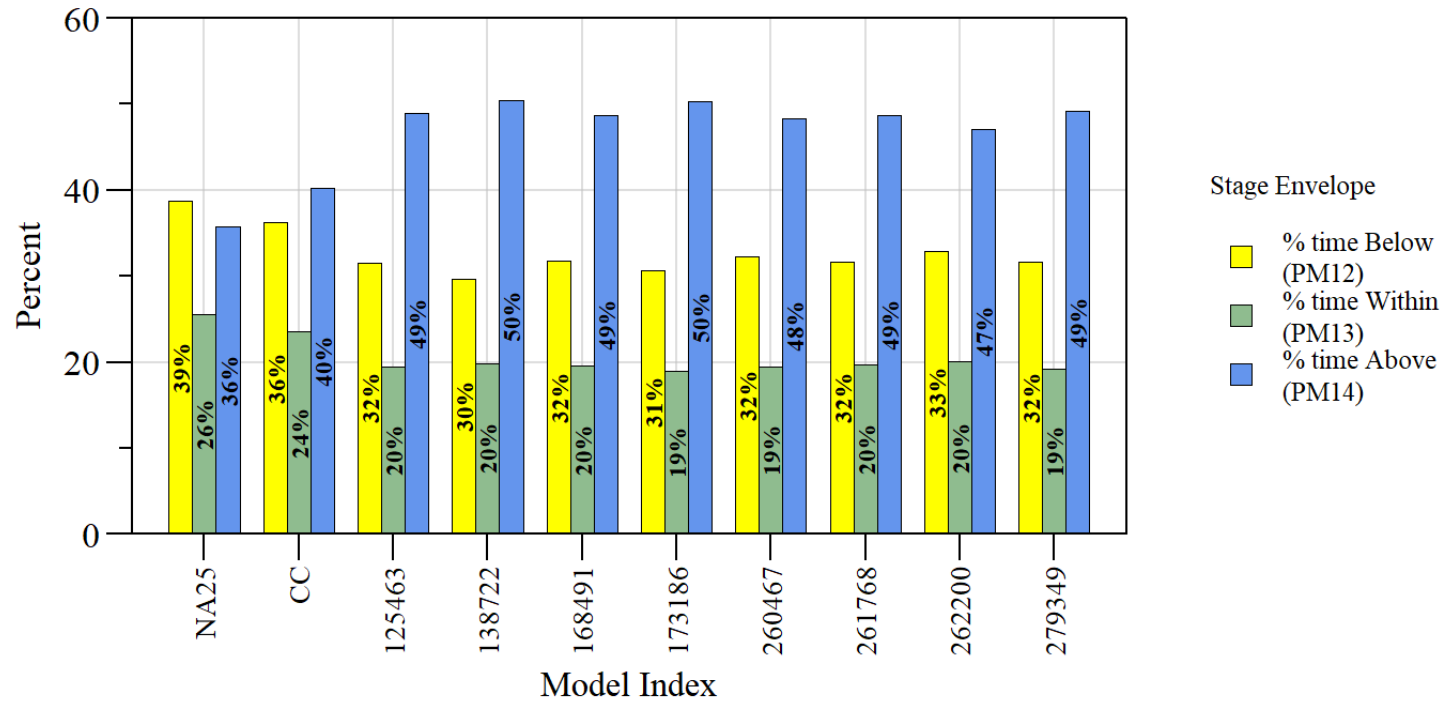





# Iteration 3 - Phase 2

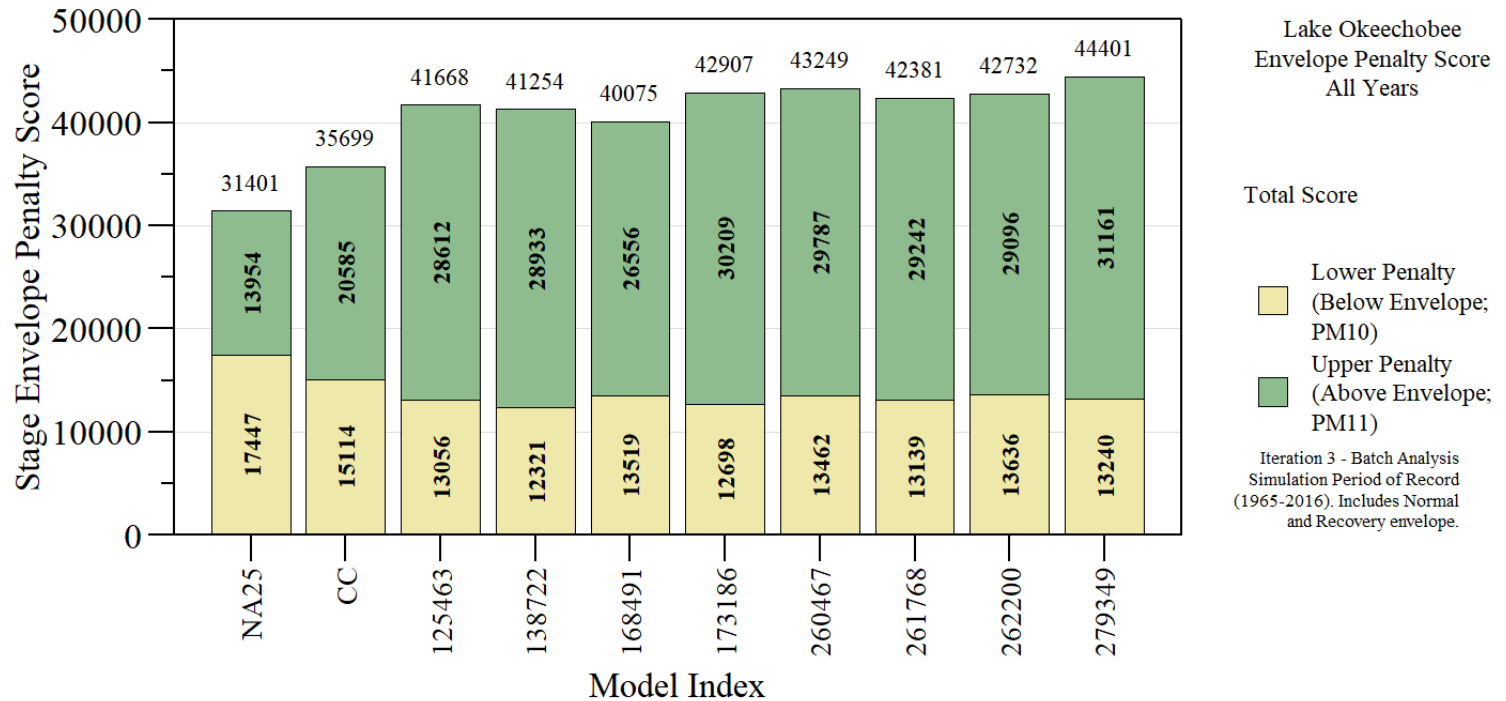


## Iteration 3 - Phase 2

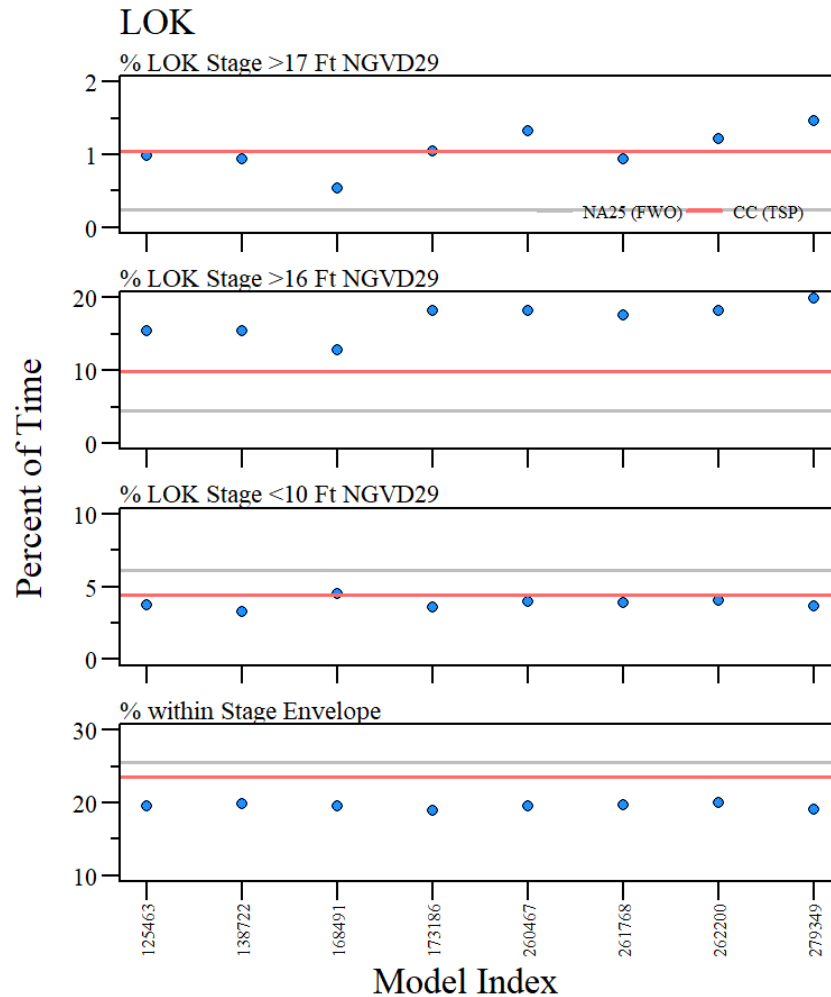

## Iteration 3 - Phase 2

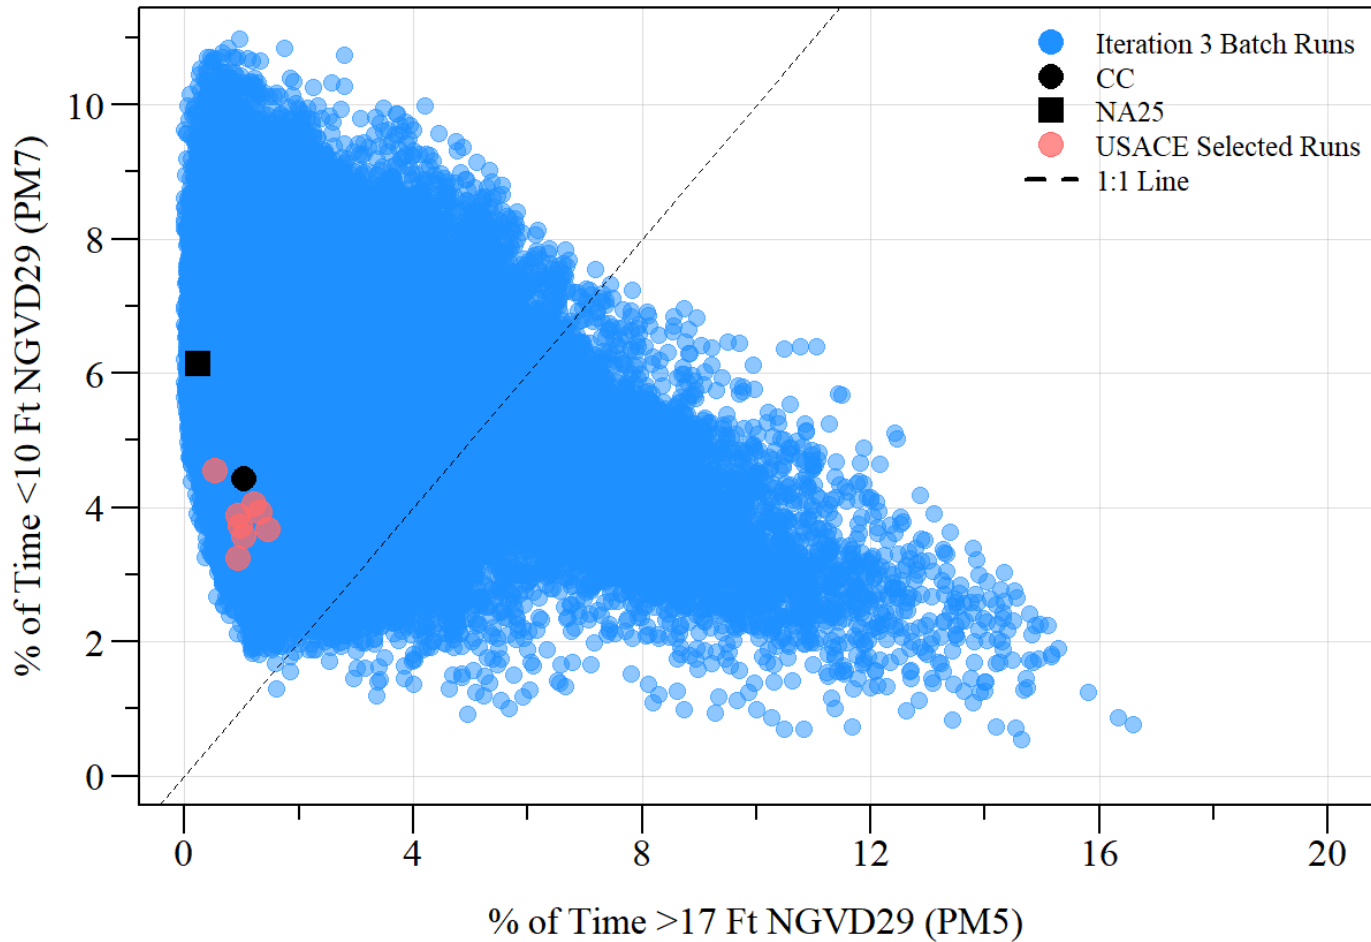

## Iteration 3 - Phase 2

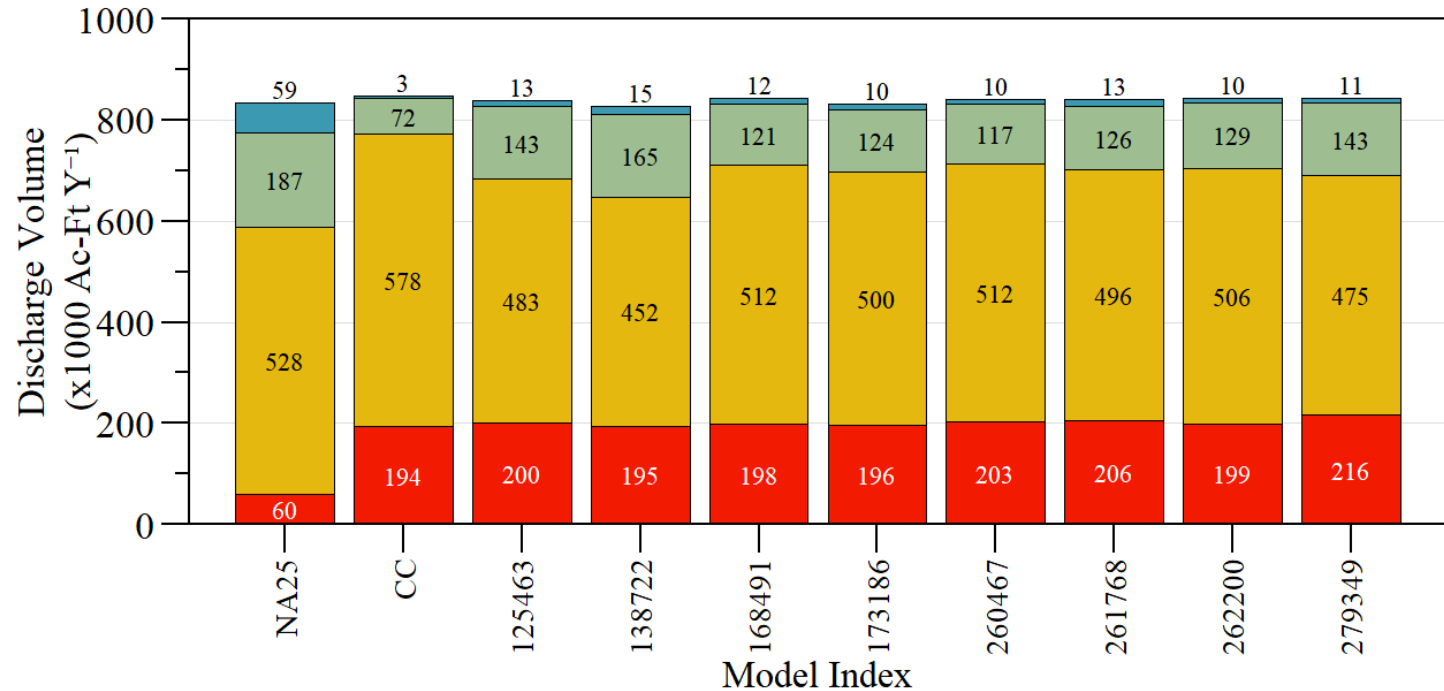

- Water Conservation Areas (PM21)
- Caloosahatchee River (PM40)
- St. Lucie River (PM88)
- Lake Worth Lagoon (PM118)

*Iteration 3 screened batch results. Mean annual flood control releases from Lake Okeechobee for the 52 year (1965 - 2016) simulation period of record.*

# Iteration 3 - Phase 2

Descript2	Model Index								
	CC	125463	138722	168491	173186	260467	261768	262200	279349
CRE - Low (PM30)	-32.2	-14.0	-6.1	-11.2	-11.7	-19.1	-18.2	-15.3	-15.5
CRE - Optimum (PM31)	20.4	23.9	18.9	20.9	25.6	30.0	29.2	25.6	27.3
CRE - Stress from LOK (PM37)	57.9	-60.7	-63.9	-65.0	-59.0	-62.8	-65.0	-55.7	-61.2
CRE - Damaging from LOK (PM38)	-16.1	-49.5	-52.7	-43.5	-53.2	-55.9	-55.4	-49.5	-58.6
CRE - Extreme (PM36)	-1.7	25.9	20.7	46.6	43.1	27.6	43.1	15.5	15.5
SLE - Low (PM80)	61.0	73.3	68.6	73.3	71.4	74.3	66.7	76.2	72.4
SLE - Optimum (PM81)	7.5	3.5	1.7	3.5	5.8	5.7	4.9	5.3	5.3
SLE - Stress from LOK (PM86)	-91.2	-81.1	-65.5	-75.7	-77.7	-78.4	-64.9	-80.4	-81.8
SLE - Damaging from LOK (PM87)	-88.0	-62.0	-50.7	-66.2	-75.4	-73.9	-66.9	-74.6	-74.6
SLE - Extreme (PM85)	-8.1	5.0	4.3	-1.2	4.3	4.3	1.2	6.2	9.3
S308 Regulatory Flow (PM88)	-61.7	-23.6	-12.0	-35.6	-33.6	-37.4	-32.8	-31.0	-23.9
S77 Regulatory Flow (PM40)	9.5	-8.4	-14.3	-2.9	-5.2	-3.1	-6.1	-4.2	-10.1
CRE MFL (PM39)	0.0	-10.0	0.0	-10.0	0.0	-10.0	-10.0	-20.0	-10.0
LOK MFL (PM20)	-22.2	-22.2	-22.2	-11.1	-22.2	-11.1	-11.1	-11.1	-11.1
LOK - Total Stage Envelope Penalty (PM10+PM11)	13.7	32.7	31.4	27.6	36.6	37.7	35.0	36.1	41.4

Percent Difference relative to FWO (NA25)

*“Balance is not a passive resting place—it takes work, balancing the giving and the taking...” — Robin Wall Kimmerer*

# Iteration 3 - Phase 2

