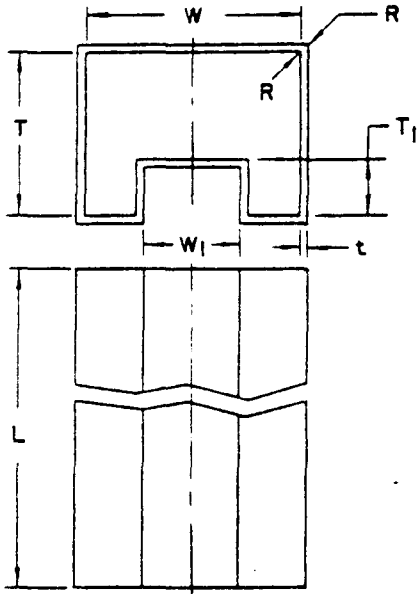**NOTES:**

1. REFER TO APPLICABLE SYMBOL LIST.

2. DIMENSIONING AND TOLERANCING PER ANSI Y14.5-1973.

3. ENDS MUST HAVE NO BURRS.

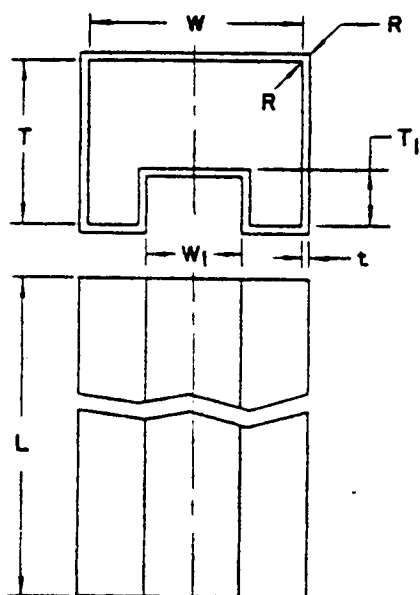4. LENGTH "L" TO BE SPECIFIED BY USER.

5. CONTROLLING DIMENSION: INCH.

SYMBOL	VARIATIONS (ALL DIMENSIONS IN MILLIMETERS)											
	AA		NOTE	AB		NOTE	AC		NOTE	AD		NOTE
	MIN.	MAX.		MIN.	MAX.		MIN.	MAX.		MIN.	MAX.	
L	---	---	4	---	---	4	---	---	4	---	---	4
R	.000	.127		.000	.127		.000	.127		.000	.127	
T	7.62	7.87		9.78	10.03		6.99	7.23		9.78	10.03	
T_1	3.353	3.505		3.353	3.505		3.353	3.505		3.353	3.505	
t	.407	.482		.407	.482		.407	.482		.407	.482	
W	9.78	10.03		9.78	10.03		10.93	11.17		12.70	12.95	
W_1	5.08	5.58		5.08	5.58		5.08	5.58		5.08	5.58	
NOTE	1,2,3,5			1,2,3,5			1,2,3,5			1,2,3,5		
REF.	7.62 ROW SPACING			7.62 ROW SPACING			10.16 ROW SPACING			10.16 ROW SPACING		
ISSUE	A APRIL 1979			A APRIL 1979			A APRIL 1979			A APRIL 1979		

JEDEC SOLID STATE PRODUCT OUTLINES	TITLE MAGAZINE FOR DUAL-IN-LINE PRODUCT	ISSUE A	DATE 5/01/79	CO-005 AA-AD

NOTES:

1. REFER TO APPLICABLE SYMBOL LIST.

2. DIMENSIONING AND TOLERANCING PER ANSI Y14.5-1973.

3. ENDS MUST HAVE NO BURRS.

4. LENGTH "L" TO BE SPECIFIED BY USER.
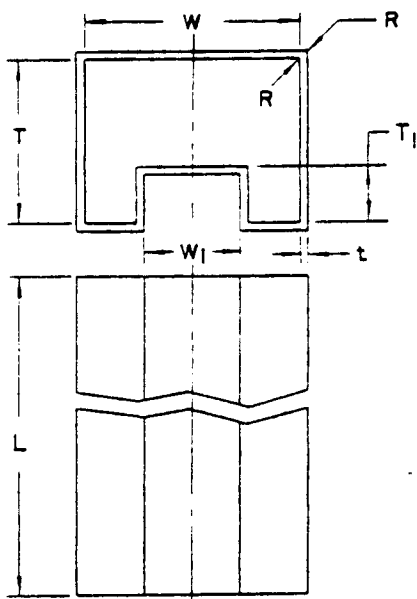
5. CONTROLLING DIMENSION: INCH.

SYMBOL	AA MIN.	AA MAX.	NOTE	AB MIN.	AB MAX.	NOTE	AC MIN.	AC MAX.	NOTE	AD MIN.	AD MAX.	NOTE
L	---	---	4	---	---	4	---	---	4	---	---	4
R	.000	.005		.000	.005		.000	.005		.000	.005	
T	.300	.310		.385	.395		.275	.285		.385	.395	
T_1	.132	.138		.132	.138		.132	.138		.132	.138	
t	.016	.019		.016	.019		.016	.019		.016	.019	
W	.385	.395		.385	.395		.430	.440		.500	.510	
W_1	.200	.220		.200	.220		.200	.220		.200	.220	
NOTE	1,2,3,5			1,2,3,5			1,2,3,5			1,2,3,5		
REF.	.300 ROW SPACING			.300 ROW SPACING			.400 ROW SPACING			.400 ROW SPACING		
ISSUE	A APRIL 1979			A APRIL 1979			A APRIL 1979			A APRIL 1979		

VARIATIONS (ALL DIMENSIONS IN INCHES)

JEDEC SOLID STATE PRODUCT OUTLINES	TITLE MAGAZINE FOR DUAL-IN-LINE PRODUCT	ISSUE A	DATE 5/01/79	CO-005 AA-AD

NOTES:

1. REFER TO APPLICABLE SYMBOL LIST.

2. DIMENSIONING AND TOLERANCING PER ANSI Y14.5-1973.

3. ENDS MUST HAVE NO BURRS.

4. LENGTH "L" TO BE SPECIFIED BY USER.

5. CONTROLLING DIMENSION: INCH.

SYMBOL	VARIATIONS (ALL DIMENSIONS IN MILLIMETERS)											
	AE		NOTE	AF		NOTE			NOTE			NOTE
	MIN.	MAX.		MIN.	MAX.		MIN.	MAX.		MIN.	MAX.	
L	---	---	4	---	---	4						
R	.000	.127		.000	.127							
T	8.01	8.25		9.78	10.03							
T_1	3.353	3.505		3.353	3.505							
t	.458	.558		.458	.558							
W	17.40	17.78		18.80	19.05							
W_1	5.08	5.58		5.08	5.58							
NOTE	1,2,3,5			1,2,3,5								
REF.	15.24 ROW SPACING			15.24 ROW SPACING								
ISSUE	A APRIL 1979			A APRIL 1979								

JEDEC SOLID STATE PRODUCT OUTLINES	TITLE MAGAZINE FOR DUAL-IN-LINE PRODUCT	ISSUE A	DATE 5/01/79	CO-005 AE-AF

NOTES:

1. REFER TO APPLICABLE SYMBOL LIST.

2. DIMENSIONING AND TOLERANCING PER ANSI Y14.5-1973.

3. ENDS MUST HAVE NO BURRS.

4. LENGTH "L" TO BE SPECIFIED BY USER.

5. CONTROLLING DIMENSION: INCH.

SYMBOL	VARIATIONS (ALL DIMENSIONS IN INCHES)											
	AE		NOTE	AF		NOTE			NOTE			NOTE
	MIN.	MAX.		MIN.	MAX.		MIN.	MAX.		MIN.	MAX.	
L	---	---	4	---	---	4						
R	.000	.005		.000	.005							
T	.315	.325		.385	.395							
T_1	.132	.138		.132	.138							
t	.018	.022		.018	.022							
W	.685	.700		.740	.750							
W_1	.200	.220		.200	.220							
NOTE	1,2,3,5			1,2,3,5								
REF.	.600 ROW SPACING			.600 ROW SPACING								
ISSUE	A APRIL 1979			A APRIL 1979								

JEDEC SOLID STATE PRODUCT OUTLINES	TITLE MAGAZINE FOR DUAL-IN-LINE PRODUCT	ISSUE A	DATE 5/01/79	CO-005-AE-AF