

Figure 1

NOTES:

1. REFER TO APPLICABLE SYMBOL LIST.
2. DIMENSIONING AND TOLERANCING PER ANSI Y14.5, 1973.
3. TWO LEADS.
4. SQUARE OR RADIUS ON END OF TERMINAL OPTIONAL.
5. TWO HOLES.
6. BOTH ENDS.
7. FIGURE 1 LEAD CONFIGURATION APPLICABLE.
8. DATUM SURFACE $-B-$ IS SEATING PLANE.
9. DIMENSIONS $-\phi p-$ & $-\phi r-$ ARE DATUMS.
10. POSITIONAL TOLERANCE FOR ϕD :
 $\phi .25 \text{ (M) B } \phi p \text{ (M) } \phi r \text{ (M)}$
11. CONTROLLING DIMENSION: MILLIMETERS.

SYMBOL	VARIATIONS (ALL DIMENSIONS SHOWN IN MILLIMETERS)											
	AA		NOTE	AB		NOTE	AC		NOTE	AD		NOTE
	MIN.	MAX.		MIN.	MAX.		MIN.	MAX.		MIN.	MAX.	
A	6.4	11.4		6.4	11.4		6.4	7.6		6.4	11.4	
A ₁	-	3.42		-	3.42		1.53	3.42		1.53	3.42	
b	-	-		3.18	5.33		-	-		-	-	
Øb	.966	1.092	3	-	-		.991	1.092	3	1.22	1.35	3
ØD	-	22.22		-	22.22		-	21.08		-	22.22	
e	10.67	11.17		10.67	11.17		10.67	11.17		10.67	11.17	
e ₁	5.21	5.71		5.21	5.71		5.21	5.71		5.21	5.71	
L	7.93	-	3	14.3	17.2	3	11.18	12.19	3	8.13	10.67	3
L ₁	-	-		-	-		-	1.27		-	-	
O	-	-		12.70	14.75		-	-		-	-	
O ₁	-	-		1.83	4.31	4	-	-		-	-	
Øp	3.84	4.19	5,9	3.84	4.19	5,9	3.84	4.19	5,9	3.84	4.19	5,9
Øp ₁	3.84	4.19	5,9	3.84	4.19	5,9	3.84	4.19	5,9	3.84	4.19	5,9
q	30.15	BSC		30.15	BSC		30.15	BSC		30.15	BSC	
R	-	13.33		-	13.33		12.58	13.33		12.58	13.33	
R ₁	-	4.77	6	-	4.77	4	3.33	4.77	6	3.33	4.77	6
s	16.64	17.14		16.64	17.14		16.64	17.14		16.64	17.14	
ØT	-	-		1.83	3.04		-	-		-	-	
NOTE	1,2,8,9,10,11			1,2,7,8,9,10,11			1,2,8,9,10,11			1,2,8,9,10,11		
REF.	TO-3			TO-41								
ISSUE	C NOV. 82			C NOV. 82			C NOV. 82			c NOV. 82		
JEDEC SOLID STATE PRODUCT OUTLINES				TITLE FLANGE MOUNTED HEADER FAMILY 10.922 PIN SPACING				ISSUE C	DATE NOV. 82	TO-204 VARIATION AA-AD		

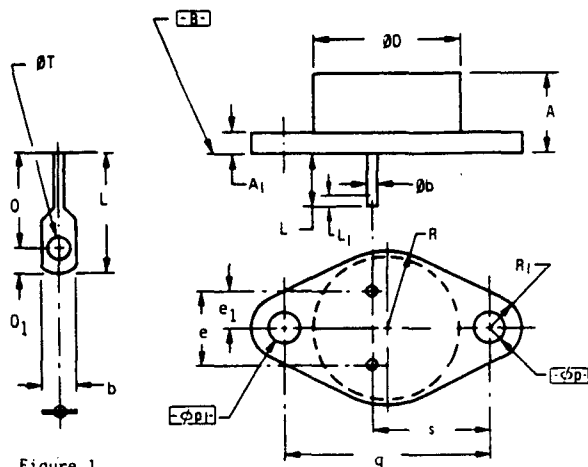


Figure 1

NOTES:

1. REFER TO APPLICABLE SYMBOL LIST.
2. DIMENSIONING AND TOLERANCING PER ANSI Y14.5, 1973.
3. TWO LEADS.
4. SQUARE OR RADIUS ON END OF TERMINAL OPTIONAL.
5. TWO HOLES.
6. BOTH ENDS.
7. FIGURE 1 LEAD CONFIGURATION APPLICABLE.
8. DATUM SURFACE -B- IS SEATING PLANE.
9. DIMENSIONS -Øp- & -Øp1- ARE DATUMS
10. POSITIONAL TOLERANCE FOR ØD:
 $\phi .010 \phi B \phi p1 \phi R \phi$
11. CONTROLLING DIMENSION: INCH.

VARIATIONS (ALL DIMENSIONS SHOWN IN INCHES)

SYMBOL	VARIATIONS (ALL DIMENSIONS SHOWN IN INCHES)												
	AA		NOTE	AB		NOTE	AC		NOTE	AD		NOTE	
	MIN.	MAX.		MIN.	MAX.		MIN.	MAX.		MIN.	MAX.		
A	.250	.450		.250	.450		.250	.300		.250	.450		
A1	-	.135		-	.135		.060	.135		.060	.135		
b	-	-		.125	.210		-	-		-	-		
Øb	.038	.043	3	-	-		.039	.043		.048	.053	3	
ØD	-	.875		-	.875		-	.830		-	.875	10	
e	.420	.440		.420	.440		.420	.440		.420	.440		
e1	.205	.225		.205	.225		.205	.225		.205	.225		
L	.312	-	3	.560	.680	3	.440	.480	3	.320	.420	3	
L1	-	-		-	-		-	.050		-	-		
O	-	-		.500	.581		-	-		-	-		
O1	-	-		.072	.170		-	-		-	-		
Øp1	.151	.165	5,9	.151	.165	5,9	.151	.165	5,9	.151	.165	5,9	
Øp1	.151	.165	5,9	.151	.165	5,9	.151	.165	5,9	.151	.165	5,9	
q	1.187	BSC		1.187	BSC		1.187	BSC		1.187	BSC		
R	--	.525		--	.525		.495	.525		.495	.525		
R1	--	.188	6	--	.188	6	.131	.188	6	.131	.188	6	
s	.655	.675		.655	.675		.655	.675		.655	.675		
ØT	--	--		.072	.120		--	--		--	--		
NOTE	1,2,8,9,10,11			1,2,7,8,9,10,11			1,2,8,9,10,11			1,2,8,9,10,11			
REF.	TO-3			TO-41									
ISSUE	C NOV. 82			C NOV. 82			C NOV. 82			C NOV. 82			
JEDEC SOLID STATE PRODUCT OUTLINES				TITLE FLANGE MOUNTED HEADER FAMILY .430 PIN SPACING				ISSUE C		DATE NOV. 82		T0-204 VARIATION AA-AD	

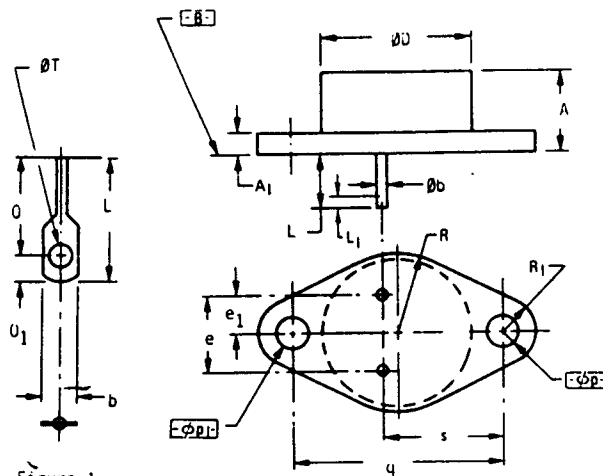


Figure 1

NOTES:

1. REFER TO APPLICABLE SYMBOL LIST.
2. DIMENSIONING AND TOLERANCING PER ANSI Y14.5, 1973.
3. TWO LEADS.
4. SQUARE OR RADIUS ON END OF TERMINAL OPTIONAL.
5. TWO HOLES.
6. BOTH ENDS.
7. FIGURE 1 LEAD CONFIGURATION APPLICABLE.
8. DATUM SURFACE [B] IS SEATING PLANE.
9. DIMENSIONS [ØD] & [ØP1] ARE DATUMS.
10. POSITIONAL TOLERANCE FOR ØD:
 $\phi .25 \text{ M B } \phi p1 \text{ (M) } \phi p1$
11. CONTROLLING DIMENSION: MILLIMETERS.

SYMBOL	VARIATIONS (ALL DIMENSIONS SHOWN IN MILLIMETERS)												
	AE		NOTE			NOTE			NOTE			NOTE	
	MIN.	MAX.		MIN.	MAX.		MIN.	MAX.					
A	6.4	11.4											
A ₁	1.53	3.42											
b	-	-											
Øb	1.45	1.60	3										
ØD	-	22.22											
e	10.67	11.17											
e ₁	5.21	5.71											
L	11.18	12.19											
L ₁	-	-											
O	-	-											
O ₁	-	-											
Øp ₁	3.84	4.19	5,9										
Øp ₁	3.84	4.19	5,9										
q	30.15	BSC											
R	12.58	13.33											
R ₁	3.33	4.77	6										
s	16.64	17.14											
ØT	-	-											
NOTE	1,2,8,9,10,11												
REF.													
ISSUE	B NOV. 82												
JEDEC SOLID STATE PRODUCT OUTLINES				TITLE FLANGE MOUNTED HEADER FAMILY 10.922 PIN SPACING				ISSUE B		DATE NOV. 82		T0-204	
												VARIATION AE	

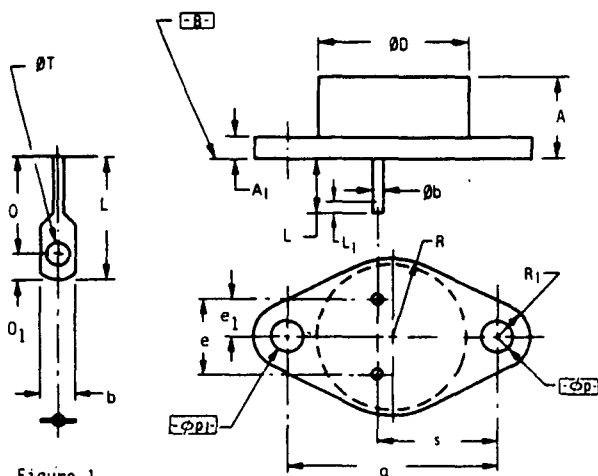


Figure 1

NOTES:

1. REFER TO APPLICABLE SYMBOL LIST.
2. DIMENSIONING AND TOLERANCING PER ANSI Y14.5, 1973.
3. TWO LEADS.
4. SQUARE OR RADIUS ON END OF TERMINAL OPTIONAL.
5. TWO HOLES.
6. BOTH ENDS.
7. FIGURE 1 LEAD CONFIGURATION APPLICABLE.
8. DATUM SURFACE [-B-] IS SEATING PLANE.
9. DIMENSIONS [-Øp-] & [-Øp1-] ARE DATUMS.
10. POSITIONAL TOLERANCE FOR ØD:

$$\begin{matrix} \text{Ø} & \text{Ø} & .010\text{M} & \text{B} & \text{Øp1} & \text{Øp1} & \text{Øp1} & \text{Øp1} \end{matrix}$$
11. CONTROLLING DIMENSION: INCH.

SYMBOL	VARIATIONS (ALL DIMENSIONS SHOWN IN INCHES)												
	AE		NOTE			NOTE			NOTE			NOTE	
	MIN.	MAX.		MIN.	MAX.		MIN.	MAX.		MIN.	MAX.		
A	.250	.450											
A ₁	.060	.135											
b	-	-											
Øb	.057	.063	3										
ØD	-	.875											
e	.420	.440											
e ₁	.205	.225											
L	.440	.480											
L ₁	-	-											
O	-	-											
O ₁	-	-											
Øp ₁	.151	.165	5,9										
Øp ₁	.151	.165	5,9										
q	1.187	BSC											
R	.495	.525											
R ₁	.131	.188	6										
s	.655	.675											
ØT	-	-											
NOTE	1,2,8,9,10,11												
REF.													
ISSUE	B NOV. 82												
JEDEC SOLID STATE PRODUCT OUTLINES				TITLE FLANGE MOUNTED HEADER FAMILY .430 PIN SPACING				ISSUE B		DATE NOV. 82		T0-204	
												VARIATION AE	