


SECTION A-A

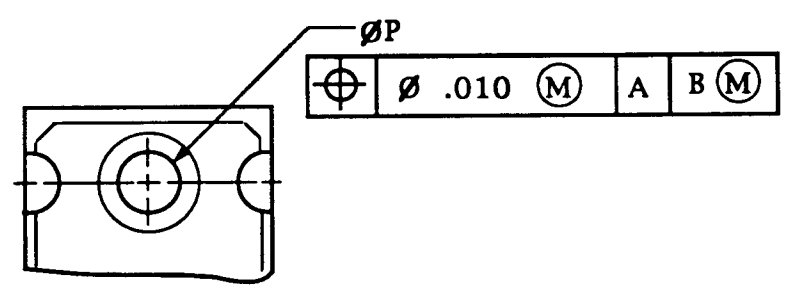

VIEW B-B

NOTES:

1. REFER TO APPLICABLE SYMBOL LIST.
2. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M-1982.
3. DIMENSIONS b_3 AND c_1 APPLY TO BASE METAL ONLY. DIMENSIONS b AND c APPLY TO PLATING
4. POINTED OR ROUNDED LEAD TIPS ARE PREFERRED TO EASE INSERTION.
5. DIMENSION S APPLIES TO THE MOUNTING HOLE, ($\varnothing P$). DIMENSIONS Q AND Q_1 APPLY TO NOTCHES, BOTH SIDES.
6. SECTION A-A DIMENSIONS APPLY BETWEEN .100 TO .150 INCHES FROM LEAD TIP.
7. ALL DIMENSIONS IN INCHES.

SYMBOL	VARIATION				NOTES	
	AA					
	MIN	NOM	MAX			
A	.185	.196	.209			
A1	.102	.110	.118			
b	.037	-	.055	3		
b1	.087	.094	.102	3		
b2	.110	.118	.126			
b3	.037	.045	.054	3		
c	.017	-	.029	3		
c1	.017	.020	.023	3		
D	1.007	1.027	1.047			
E	.760	.780	.799			
e		.215 BSC				
L	.779	.811	.842	4		
L1	.087	.094	.102			
L2	-	-	.100	4		
ØP	.122	.130	.138	5		
Q	.240	.248	.256	5		
Q1	.330	.338	.346	5		
ØR	.155	.171	.187			
ØR1	.085	.088	.093			
S		.248 BSC		5		
NOTE	1, 2, 7					
REF.	10-339					
ISSUE						
JEDEC SOLID STATE PRODUCT OUTLINES		TITLE: R-PSFM-F3 HEADER FAMILY INSERTION MOUNT (PERIPHERAL TERMINALS)	ISSUE B	DATE Nov. 1993	TO-264	SHEET 2 OF 2