


1. ALL DIMENSIONS AND TOLERANCES SHALL CONFORM TO ANSI Y14.5M-1982.
2. INDEX AREA: A PIN IDENTIFICATION MARK SHALL BE LOCATED ADJACENT TO PIN ONE WITHIN THE SHADED AREA SHOWN. ALTERNATIVELY, A TAB (DIM k) MAY BE USED AS SHOWN.
3. DIMENSION Q SHALL BE MEASURED AT THE POINT OF LEAD EXIT FROM THE BODY.
4. THIS DIMENSION INCLUDES LID-TO-BASE MISALIGNMENT, GLASS MENISCUS AND OVERFLOW.
5. DIMENSION APPLIES TO ALL FOUR PACKAGE CORNERS. S1 DIMENSION CAN BE 0.00 MIN IF THE LEAD BENDS TOWARD THE CENTER OF PACKAGE WITHIN ONE LEAD WIDTH FROM ENTERING THE CERAMIC BODY.
6. LEAD WIDTH AND THICKNESS TOLERANCE INCLUDES ALL PERMISSIBLE FINISHES.
7. OPTIONAL, SEE NOTE 2. IF A PIN ONE IDENTIFICATION MARK IS USED IN ADDITION TO THIS TAB, THE MINIMUM LIMIT OF k DOES NOT APPLY.
8. DATUM -C- IS REFERENCED AT THE POINT OF LEAD EXIT FROM THE PACKAGE BODY.
9. CONTROLLING DIMENSION: INCH

SYMBOL	VARIATIONS (ALL DIMENSIONS SHOWN IN MILLIMETERS)											
	AA		NOTE	AB		NOTE	AC		NOTE	AD		NOTE
	MIN.	MAX.		MIN.	MAX.		MIN.	MAX.		MIN.	MAX.	
A	1.40	2.29		1.40	2.29		1.40	2.29		1.40	2.29	
b	.38	.48	6	.38	.48	6	.38	.48	6	.38	.48	6
c	.11	.20	6,8	.11	.20	6,8	.11	.20	6,8	.11	.20	6,8
D	5.84	7.11	4	8.38	9.91	4	9.91	10.92	4	10.92	13.21	4
E	6.04	7.62	4	6.22	7.62	4	6.22	7.62	4	6.22	8.13	4
e	1.27 BSC			1.27 BSC			1.27 BSC			1.27 BSC		
H	21.59 REF			21.59 REF			21.59 REF			21.59 REF		
k	.13	.46	7	.13	.46	7	.13	.46	7	.13	.46	7
L	6.35	9.40		6.35	9.40		6.35	9.40		6.35	9.40	
Q	.66	1.14	3	.66	1.14	3	.66	1.14	3	.66	1.14	3
S		1.02	5		1.02	5		1.02	5		1.78	5
S1	.13		5	.13		5	.13		5	.13		5
N	10			14			16			18		
NOTE												
REF.	11.10 ITEM 270											
ISSUE												
JEDEC SOLID STATE PRODUCT OUTLINES			TITLE 6.35 MM WIDTH CERPAK REGISTRATION				ISSUE A	DATE 4/89	MO-092			

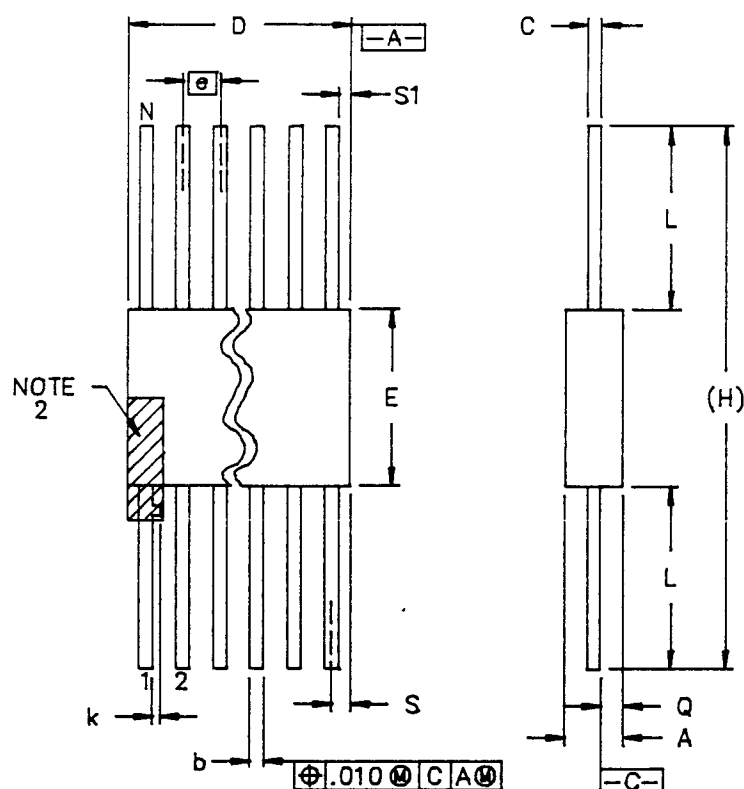

1. ALL DIMENSIONS AND TOLERANCES SHALL CONFORM TO ANSI Y14.5M-1982.
2. INDEX AREA: A PIN IDENTIFICATION MARK SHALL BE LOCATED ADJACENT TO PIN ONE WITHIN THE SHADED AREA SHOWN. ALTERNATIVELY, A TAB (DIM k) MAY BE USED AS SHOWN.
3. DIMENSION Q SHALL BE MEASURED AT THE POINT OF LEAD EXIT FROM THE BODY.
4. THIS DIMENSION INCLUDES LID-TO-BASE MISALIGNMENT, GLASS MENISCUS AND OVERFLOW.
5. DIMENSION APPLIES TO ALL FOUR PACKAGE CORNERS. S1 DIMENSION CAN BE 0.00 MIN IF THE LEAD BENDS TOWARD THE CENTER OF PACKAGE WITHIN ONE LEAD WIDTH FROM ENTERING THE CERAMIC BODY.
6. LEAD WIDTH AND THICKNESS TOLERANCE INCLUDES ALL PERMISSIBLE FINISHES.
7. OPTIONAL, SEE NOTE 2. IF A PIN ONE IDENTIFICATION MARK IS USED IN ADDITION TO THIS TAB, THE MINIMUM LIMIT OF k DOES NOT APPLY.
8. DATUM -C- IS REFERENCED AT THE POINT OF LEAD EXIT FROM THE PACKAGE BODY.
9. CONTROLLING DIMENSION: INCH

SYMBOL	VARIATIONS (ALL DIMENSIONS SHOWN IN INCHES)											
	AA		NOTE	AB		NOTE	AC		NOTE	AD		NOTE
	MIN.	MAX.		MIN.	MAX.		MIN.	MAX.		MIN.	MAX.	
A	.055	.090		.055	.090		.055	.090		.055	.090	
b	.015	.019	6	.015	.019	6	.015	.019	6	.015	.019	6
c	.0045	.008	6,8	.0045	.008	6,8	.0045	.008	6,8	.0045	.008	6,8
D	.230	.280	4	.330	.390	4	.370	.430	4	.430	.520	4
E	.238	.300	4	.245	.300	4	.245	.300	4	.245	.320	4
e	.050 BSC			.050 BSC			.050 BSC			.050 BSC		
H	.850 REF			.850 REF			.850 REF			.850 REF		
k	.005	.018	7	.005	.018	7	.005	.018	7	.005	.018	7
L	.250	.370		.250	.370		.250	.370		.250	.370	
Q	.026	.045	3	.026	.045	3	.026	.045	3	.026	.045	3
S		.040	5		.040	5		.040	5		.070	5
S1	.005		5	.005		5	.005		5	.005		5
N	10			14			16			18		
NOTE												
REF.	11.10 ITEM 270											
ISSUE												
JEDEC SOLID STATE PRODUCT OUTLINES			TITLE 1/4 INCH WIDTH CERPAK REGISTRATION				ISSUE A	DATE 4/89	MO-092			