



TITLE	SOLID STATE FLOPPY DISK CARD (SSFDC)	PACKAGE DESIGNATOR	ISSUE	DATE	MO-186	SHEET
		R-PXMA-N	C	3/99		1 OF 3

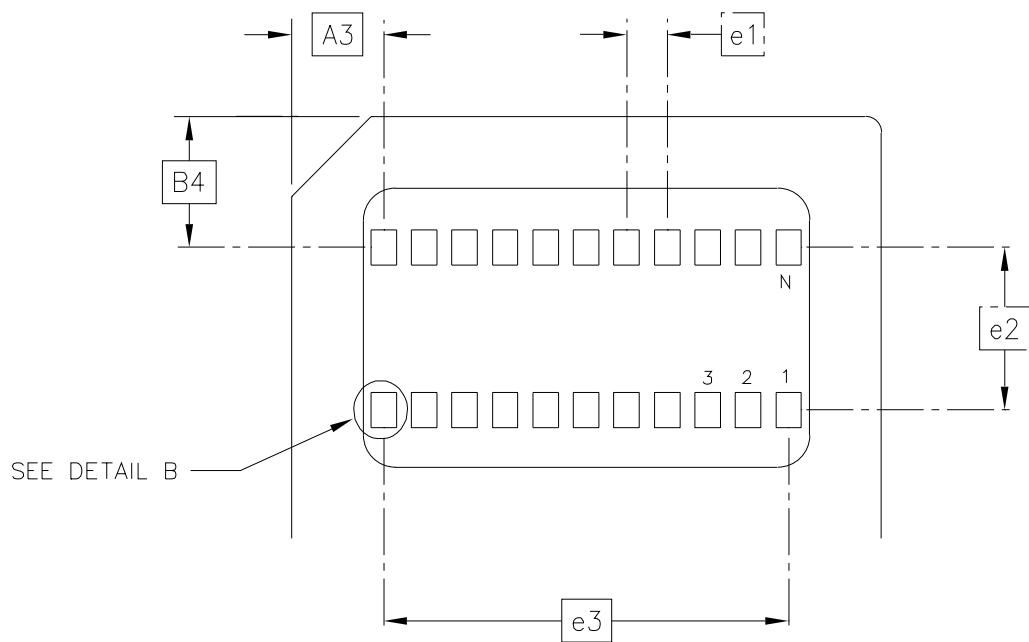


CONTACT AREA

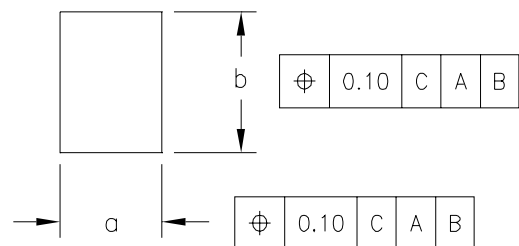

CONTACT DIMENSION

DETAIL B

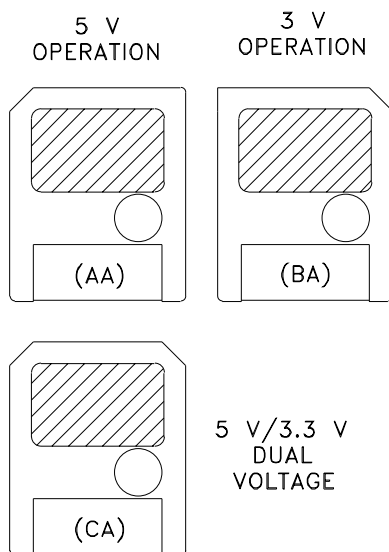

VOLTAGE CONFIGURATION

S Y M B O L	COMMON DIMENSIONS			N O T E
	MIN	NOM	MAX	
A	36.90	37.00	37.10	3
a	1.60	—	—	
A1	4.80	5.00	5.20	
A2	4.20	—	—	
A3	—	5.80 BSC	—	
B	44.90	45.00	45.10	
b	2.20	—	—	
B1	32.80	33.00	33.20	
B2	4.50	—	—	
B3	—	—	22.10	
B4	—	8.20 BSC	—	
C	0.68	0.76	0.84	
C1	0.10	—	0.20	
D	—	27.00 BSC	—	
E	—	27.50 BSC	—	
e1	—	2.54 BSC	—	
e2	—	10.20 BSC	—	
e3	—	25.40 BSC	—	
F	9.80	10.00	10.20	
G	0.10	—	0.20	
H/H1	4.80	5.00	5.20	
R1	1.40	—	1.60	
N	—	22	—	8
NOTES: 1,2				
REF. 14-035				
ISSUE: B				

VAR	VOLTAGE CONFIGURATION
AA	5 V OPERATION
AB	REMOVED (ITEM# 14-035)
BA	3 V OPERATION
CA	5 V/3.3 V DUAL VOLTAGE
NOTES	3
REF.	14-035
ISSUE	B

NOTES:

1. DIMENSIONS AND TOLERANCING CONFORM TO ASME Y14.5M-1994
2. ALL DIMENSIONS IN MILLIMETERS.
3. VOLTAGE OPERATION CHAMFER.
4. CONTACTS AREA.
5. INDEX LABEL AREA.
6. WRITE PROTECTED AREA.
7. 0.20 MM (NOM.) FILLET ON EVERY EDGE EXCEPT INDEX LABEL AREA.
8. N IS THE NUMBER OF CONTACTS.

JEDEC SOLID STATE PRODUCT OUTLINE	TITLE SOLID STATE FLOPPY DISK CARD (SSFDC)	ISSUE C	DATE 3/99	MO-186	SHEET 3 OF 3
---	---	------------	--------------	--------	-----------------