


NOTES:


1. Refer to applicable symbol list.
2. Dimensioning and tolerancing per ANSI Y14.5M-1982
3. Dimension "D" does not include mold flash, protrusions or gate burrs. Mold flash, protrusions and gate burrs shall not exceed .15 mm (.006") per side.
4. Dimension "E" does not include inter-lead flash or protrusions. Inter-lead flash and protrusions shall not exceed .25 mm (.010") per side
5. The chamfer on the body is optional. If it is not present, a visual index feature must be located within the crosshatched area.
6. "L" is the length of terminal for soldering to a substrate
7. "N" is the number of terminal positions.
8. Terminal numbers are shown for reference only.
9. The lead width "B", as measured .36 mm (.014 in.) or greater above the seating plane, shall not exceed a maximum value of .61 mm (.024 in.).
10. Controlling dimension: MILLIMETER. Converted inch dimensions are not necessarily exact.

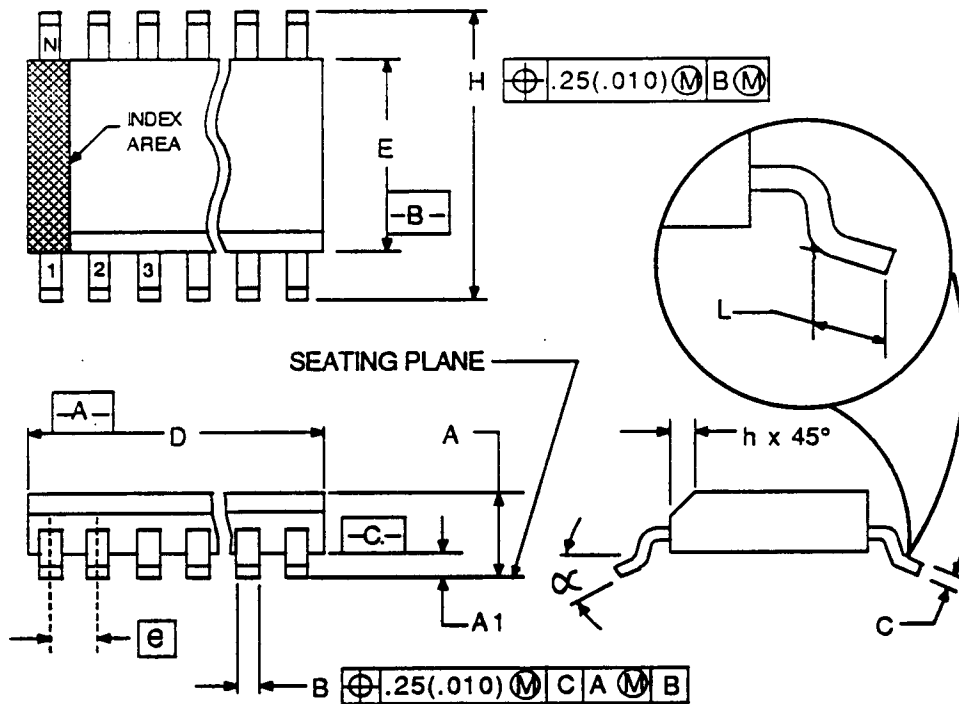

SYMBOL	COMMON DIMENSIONS		NOTE	NOTE	3		7	ALL DIMENSIONS IN MILLIMETERS		
	MIN.	MAX.		VARIATIONS	D		N	REFERENCE	ISSUE	
					MIN.	MAX.				
A	2.54	3.04		AA	17.80	18.20	28	11.217	A	
A1	.102	.35								
B	.35	.50	9	AB	20.30	20.70	32	11.217	A	
C	.14	.32								
D	See Variations		3							
E	11.1	11.3	4							
e	1.27 BSC									
H	13.46	14.73								
h	.25	.75	5							
L	.40	1.27	6							
N	See Variations		7							
α	0°	8°								
NOTE	1,2,3,8,10									
REF.	JC-11.11 Item 217									
ISSUE	A									
JEDEC SOLID STATE PRODUCT OUTLINES				TITLE REGISTRATION Small Outline (SO) Family Peripheral Terminals 11.2 (.440") Body Width (Plastic)			ISSUE A	DATE Oct '89	MO-099	

NOTES:

1. Refer to applicable symbol list.
2. Dimensioning and tolerancing per ANSI Y14.5M-1982
3. Dimension "D" does not include mold flash, protrusions or gate burrs. Mold flash, protrusions and gate burrs shall not exceed .15 mm (.006") per side.
4. Dimension "E" does not include inter-lead flash or protrusions. Inter-lead flash and protrusions shall not exceed .25 mm (.010") per side
5. The chamfer on the body is optional. If it is not present, a visual index feature must be located within the crosshatched area.
6. "L" is the length of terminal for soldering to a substrate
7. "N" is the number of terminal positions.
8. Terminal numbers are shown for reference only.
9. The lead width "B", as measured .36 mm (.014 in.) or greater above the seating plane, shall not exceed a maximum value of .61 mm (.024 in.).
10. Controlling dimension: MILLIMETER. Converted inch dimensions are not necessarily exact.

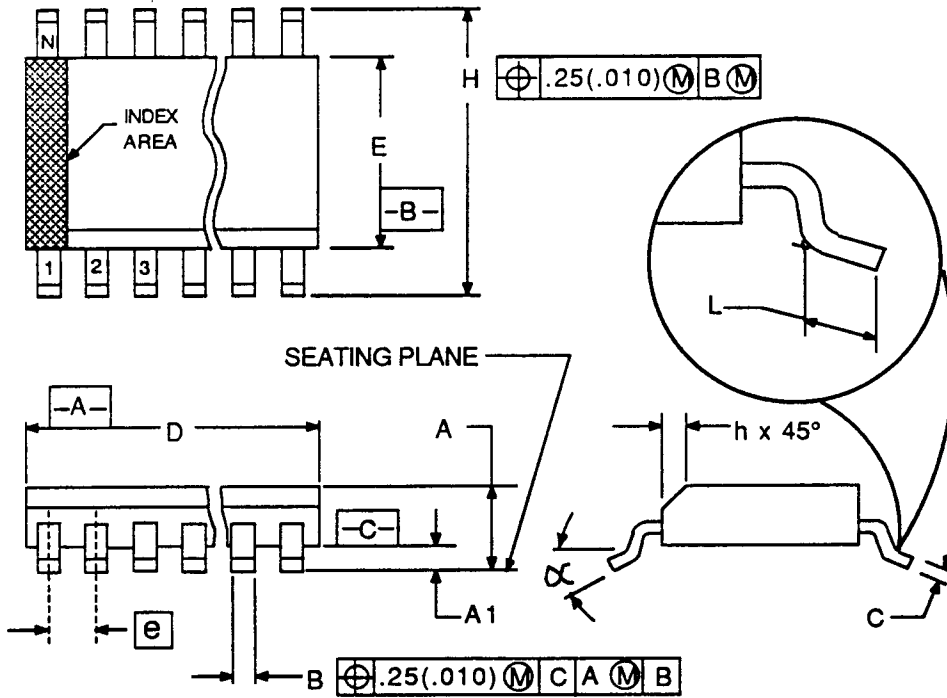

SYMBOL	COMMON DIMENSIONS		NOTE	NOTE	3		7	ALL DIMENSIONS IN INCHES		
	MIN.	MAX.		VARIATIONS	D		N	REFERENCE	ISSUE	
					MIN.	MAX.				
A	.100	.120		AA	.701	.717	28	11-217	A	
A1	.004	.014								
B	.014	.020	9	AB	.799	.815	32	11.217	A	
C	.006	.0126								
D	See Variations		3							
E	.437	.445	4							
e	.050 BSC									
H	.530	.580								
h	.010	.030	5							
L	.016	.050	6							
N	See Variations		7							
α	0°	8°								
NOTE	1,2,3,8,10									
REF.	JC-11.11 Item 217									
ISSUE	A									
JEDEC SOLID STATE PRODUCT OUTLINES				TITLE REGISTRATION Small Outline (SO) Family Peripheral Terminals 11.2 (.440") Body Width (Plastic)			ISSUE A	DATE Oct '89	MO-099	