MECHANICAL CONFIGURATION

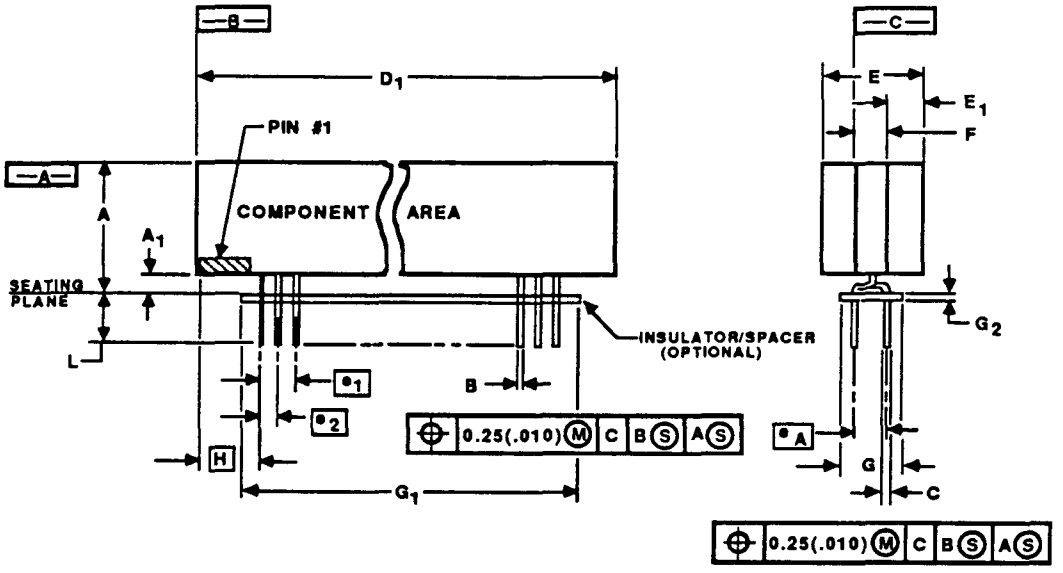

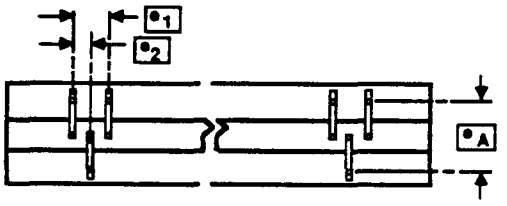

(Insulator/spacer not shown in bottom view)

NOTES:

1. Refer to applicable symbol list.
2. Dimensions and toleranoing per ANSI Y14.5M-1982.
3. Dimensions E and E_1 are for reference only.
4. Dimension H at left end of package must equal H at right end within .015(.38).
5. N is the number of leads.
6. e_1, e_2, and e_A apply when unit is installed.
7. Dimensions G and G_1 apply only when using the optional insulator/spacer.
8. Controlling dimension: Inches

SYMBOL	VARIATIONS (IN INCHES) AA MIN	AA MAX	NOTE	AB MIN	AB MAX	NOTE	VARIATIONS (IN MILLIMETERS) AA MIN	AA MAX	NOTE	AB MIN	AB MAX	NOTE			NOTE			NOTE
A	.435	.445		.435	.445		11.049	11.303		11.049	11.303							
A_1	.020	.030		.020	.030		.508	.762		.508	.762							
B	.013	.020		.013	.020		.330	.508		.330	.508							
C	.007	.012		.007	.012		.178	.305		.178	.305							
D_1	1.400	1.500		1.400	1.500		35.560	38.100		35.560	38.100							
E		.350	3		.350	3		8.890	3		8.890	3						
E_1		.140	3		.140	3		3.556	3		3.556	3						
e_1	.100 BSC		6	.100 BSC		6	2.54 BSC		6	2.54 BSC		6						
e_A	.100 BSC		6	.100 BSC		6	2.54 BSC		6	2.54 BSC		6						
e_2	.050 BSC		6	.050 BSC		6	1.27 BSC		6	1.27 BSC		6						
F	.030	.070		.030	.070		.762	1.778		.762	1.778							
G	.270	.280	7	.270	.280	7	6.858	7.112	7	6.858	7.112	7						
G_1	1.270	1.280	7	1.350	1.450	7	32.258	32.512	7	34.290	36.830	7						
G_2	.004	.006		.004	.006		.102	.152		.102	.152							
H	.190 BSC		4	.115 BSC		4	4.826 BSC		4	2.921 BSC		4						
L	.120	.140		.120	.140		3.048	3.556		3.048	3.556							
N	23		5	26		5	23		5	26		5						

NOTE					
REF.	ITEM 11-218				
ISSUE					
JEDEC SOLID STATE PRODUCT OUTLINES	TITLE ZIP MODULE FAMILY 0.050" PIN CENTERS, 0.100" ROW CENTERS	ISSUE A	DATE 9-88	MO-080, AA-AB	

MECHANICAL CONFIGURATION

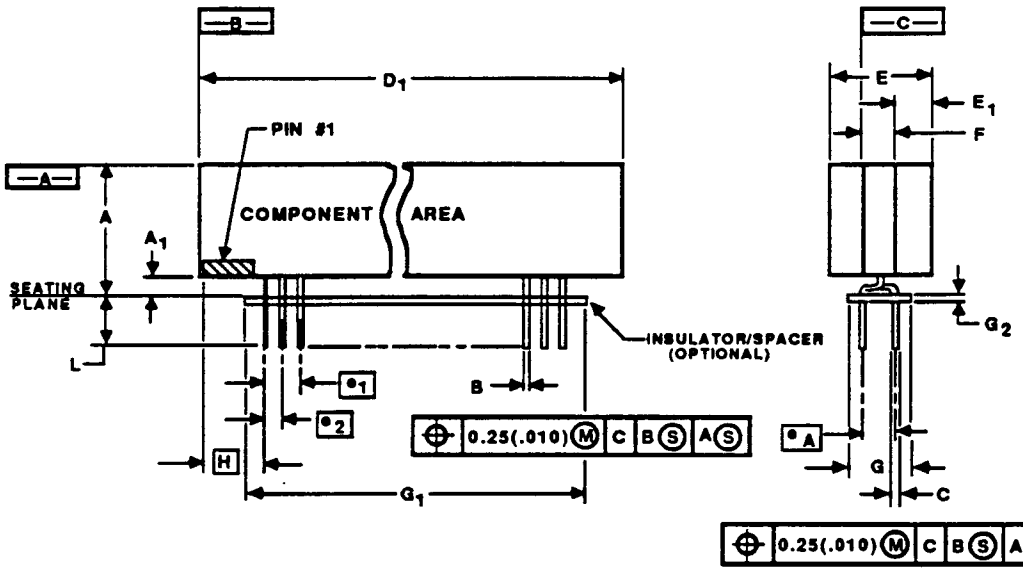

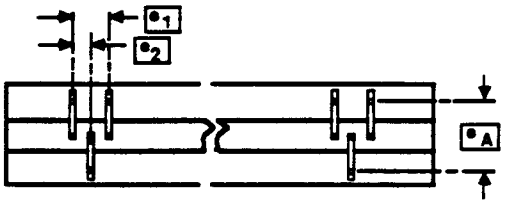

(Insulator/spacer not shown in bottom view)

NOTES:

1. Refer to applicable symbol list.
2. Dimensions and toleranoing per ANSI Y14.5M-1982.
3. Dimensions E and E_1 are for reference only.
4. Dimension H at left end of package must equal H at right end within .015(.38).
5. N is the number of leads.
6. e_1, e_2, and e_A apply when unit is installed.
7. Dimensions G and G_1 apply only when using the optional insulator/spacer.
8. Controlling dimension: Inches

SYMBOL	VARIATIONS (IN INCHES) AA MIN	AA MAX	NOTE	AB MIN	AB MAX	NOTE	VARIATIONS (IN MILLIMETERS) AA MIN	AA MAX	NOTE	AB MIN	AB MAX	NOTE			NOTE			NOTE
A	.435	.445		.435	.445		11.049	11.303		11.049	11.303							
A_1	.020	.030		.020	.030		.508	.762		.508	.762							
B	.013	.020		.013	.020		.330	.508		.330	.508							
C	.007	.012		.007	.012		.178	.305		.178	.305							
D_1	1.400	1.500		1.400	1.500		35.560	38.100		35.560	38.100							
E		.350	3		.350	3		8.890	3		8.890	3						
E_1		.140	3		.140	3		3.556	3		3.556	3						
e_1	.100 BSC		6	.100 BSC		6	2.54 BSC		6	2.54 BSC		6						
e_A	.100 BSC		6	.100 BSC		6	2.54 BSC		6	2.54 BSC		6						
e_2	.050 BSC		6	.050 BSC		6	1.27 BSC		6	1.27 BSC		6						
F	.030	.070		.030	.070		.762	1.778		.762	1.778							
G	.270	.280	7	.270	.280	7	6.858	7.112	7	6.858	7.112	7						
G_1	1.270	1.280	7	1.350	1.450	7	32.258	32.512	7	34.290	36.830	7						
G_2	.004	.006		.004	.006		.102	.152		.102	.152							
H	.190 BSC		4	.115 BSC		4	4.826 BSC		4	2.921 BSC		4						
L	.120	.140		.120	.140		3.048	3.556		3.048	3.556							
N	23		5	26		5	23		5	26		5						

NOTE					
REF.	ITEM 11-218				
ISSUE					
JEDEC SOLID STATE PRODUCT OUTLINES	TITLE ZIP MODULE FAMILY 0.050" PIN CENTERS, 0.100" ROW CENTERS	ISSUE A	DATE 9-88	MO-080, AA-AB	