

PRODUKTINFORMATION

Vi reserverar oss mot fel samt förbehåller oss rätten till ändringar utan föregående meddelande

ELFA artikelnr

67-133-09	Ellyt 330uF/6,3V SMD	6CV330AX
67-133-17	Ellyt 220uF/10V SMD	10CV220AX
67-133-25	Ellyt 100uF/16V SMD	16CV100AX
67-133-33	Ellyt 100uF/25V SMD	25CV100AX
67-133-41	Ellyt 4,7uF/35V SMD	35CV4R7AX
67-133-58	Ellyt 10uF/35V SMD	35CV10AX
67-133-66	Ellyt 22uF/35V SMD	35CV22AX
67-133-74	Ellyt 47uF/35V SMD	35CV47AX
67-133-82	Ellyt 68uF/35V SMD	35CV68AX
67-133-90	Ellyt 1000uF/6,3V SMD	6CV1000AX
67-134-08	Ellyt 470uF/16V SMD	16CV470AX
67-134-16	Ellyt 330uF/25V SMD	25CV330AX
67-134-24	Ellyt 220uF/35V SMD	35CV220AX
67-134-32	Ellyt 470uF/10V SMD	10CV470AX
67-134-40	Ellyt 220uF/16V SMD	16CV220AX
67-134-57	Ellyt 470uF/25V SMD	25CV470AX
67-134-65	Ellyt 330uF/35V SMD	35CV330AX
67-134-73	Ellyt 22uF/50V SMD	50CV22AX
67-134-81	Ellyt 47uF/50V SMD	50CV47AX
67-134-99	Ellyt 100uF/50V SMD	50CV100AX
67-135-07	Ellyt 150uF/50V SMD	50CV150AX
67-135-15	Ellyt 220uF/50V SMD	50CV220AX
67-216-33	Ellyt 100uF/6V SMD	6CV100AX
67-216-41	Ellyt 220uF/6V SMD	6CV220AX
67-216-58	Ellyt 1500uF/6V SMD	6CV1500AX
67-216-66	Ellyt 3300uF/6V SMD	6CV3300AX
67-216-74	Ellyt 6800uF/6V SMD	6CV6800AX
67-216-82	Ellyt 330uF/16V SMD	16CV330AX
67-216-90	Ellyt 680uF/16V SMD	16CV680AX
67-217-08	Ellyt 1500uF/16V SMD	16CV1500AX
67-217-16	Ellyt 3300uF/16V SMD	16CV3300AX
67-217-24	Ellyt 10uF/25V SMD	25CV10AX
67-217-32	Ellyt 220uF/25V SMD	25CV220AX
67-217-40	Ellyt 1000uF/25V SMD	25CV1000AX
67-217-57	Ellyt 2200uF/25V SMD	25CV2200AX
67-217-65	Ellyt 150uF/35V SMD	35CV150AXA
67-217-73	Ellyt 680uF/35V SMD	35CV680AX
67-217-81	Ellyt 1500uF/35V SMD	35CV1500AX
67-217-99	Ellyt 33uF/50V SMD	50CV33AX
67-218-07	Ellyt 1000uF/50V SMD	50CV1000AX

CV-AX Series

Surface Mount Type Low impedance at high frequency

CV-AX series is low impedance.

CV-AX series contributes toward miniaturization of any products.

Solvent proof (within 2 minutes).

CV-AX

← ultra low Z


CV-GA



Specifications

Items		Specifications					
Rated voltage (V)		6.3	10	16	25	35	50
Operating temperature range (°C)		-55 to +105					
Capacitance tolerance (%)		±20 (120Hz)					
Tangent of loss angle (tan δ) (MAX.) (120Hz)	φ4 to φ6.3	0.24	0.20	0.16	0.14	0.12	0.12
	φ8 to φ16	0.28	0.24	0.20	0.16	0.14	0.14
0.02 to be added to the above value every time nominal capacitance exceeds 1000 μF.							
Leakage current (L.C.) (μA/after 2min.) (MAX.)		The greater value of either 0.01CV or 3					
Impedance (120Hz) ratio at low temperature (MAX.)	Z-40°C/Z20°C	3	2	2	2	2	2
	Z-55°C/Z20°C	5	4	4	3	3	3
High-temperature load 105°C rated voltage applied	Test time	2000hrs. (φD ≤ 6.3, φ10×7.7 : 1000hrs.)					
	ΔC/C	Within ±25% of the initial value					
	tan δ	≤ Twice the initial standard					
	L.C.	≤ The initial standard					
Resistance to soldering heat	Test	Capacitors placed on a 250°C hot plate for 30 seconds with their electrode terminals facing downward will fulfill the following conditions after being cooled to room temperature.					
	ΔC/C	Within ±10% of the initial value					
	tan δ	≤ The initial standard					
	L.C.	≤ The initial standard					
Other characteristics		Conform to IEC 60384-18					

Dimensions

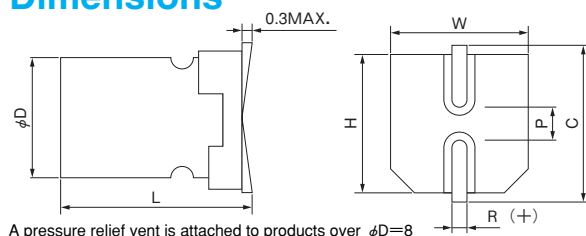

A pressure relief vent is attached to products over φD=8

(Unit :mm)

D+0.5MAX.	L±0.3	W±0.2	H±0.2	C±0.2	R	P±0.2
4	6.0	4.3	4.3	5.0	0.5 to 0.8	1.0
5	6.0	5.3	5.3	6.0	0.5 to 0.8	1.4
6.3	6.0	6.6	6.6	7.3	0.5 to 0.8	2.2
6.3	7.7	6.6	6.6	7.3	0.5 to 0.8	2.2
8	10.2	8.3	8.3	9.0	0.7 to 1.0	3.2
10	7.7	10.3	10.3	11.0	1.1 to 1.4	4.6
10	10.2	10.3	10.3	11.0	1.1 to 1.4	4.6
12.5	13.5 ±0.5	12.8	12.8	13.5	1.1 to 1.4	4.6
16	16.5 ±0.5	16.3	16.3	17.0	1.8 to 2.1	7.0

Size List

μF \ V	6.3	10	16	25	35	50
4.7					4×6.0 1.80 80	4×6.0 2.90 60
10				4×6.0 1.80 80	5×6.0 0.76 150	6.3×6.0 0.88 165
15			4×6.0 1.80 80	5×6.0 0.76 150	5×6.0 0.76 150	
22		4×6.0 1.80 80	5×6.0 0.76 150	5×6.0 0.76 150	5×6.0 0.76 150	6.3×6.0 0.88 165
27	4×6.0 1.80 80					
33	→	5×6.0 0.76 150	→	6.3×6.0 0.44 230	6.3×6.0 0.44 230	6.3×7.7 0.68 195
47	5×6.0 0.76 150	→	6.3×6.0 0.44 230	6.3×6.0 0.44 230	6.3×6.0 0.44 230	6.3×7.7 0.68 195
56	5×6.0 0.76 150			6.3×6.0 0.44 230		
68	→	6.3×6.0 0.44 230	6.3×6.0 0.44 230	6.3×6.0 0.44 230	6.3×7.7 0.34 280	
100	6.3×6.0 0.44 230	→	6.3×6.0 0.44 230	6.3×7.7 0.34 280		8×10.2 0.39 300
150	6.3×6.0 0.44 230	6.3×6.0 0.44 230	6.3×7.7 0.34 280	8×10.2 0.17 450	8×10.2 0.17 450	10×10.2 0.21 450
				→	10×7.7 0.17 450	
220	6.3×6.0 0.44 230	6.3×7.7 0.34 280	6.3×7.7 0.34 280	8×10.2 0.17 450	8×10.2 0.17 450	10×10.2 0.21 450
				10×7.7 0.17 450		
330	6.3×7.7 0.34 280	8×10.2 0.17 450	8×10.2 0.17 450	8×10.2 0.17 450	10×10.2 0.09 670	12.5×13.5 0.14 620
		→	10×7.7 0.17 450			
390						12.5×13.5 0.14 620
470	8×10.2 0.17 450	8×10.2 0.17 450	8×10.2 0.17 450	10×10.2 0.09 670	12.5×13.5 0.066 900	
		10×7.7 0.17 450				
680	8×10.2 0.17 450	→	10×10.2 0.09 670		12.5×13.5 0.066 900	
	10×7.7 0.17 450					
1000	8×10.2 0.17 450	10×10.2 0.09 670		12.5×13.5 0.066 900		16×16.5 0.052 1250
1500	10×10.2 0.09 670		12.5×13.5 0.066 900		16×16.5 0.052 1250	
2200		12.5×13.5 0.066 900		16×16.5 0.052 1250		
3300	12.5×13.5 0.066 900		16×16.5 0.052 1250			
4700		16×16.5 0.052 1250				
6800	16×16.5 0.052 1250					

→Use next higher voltage product.

10×7.7 ; CV-AXA series

φD×Lmm

Model No. 16CV470AX

10CV470AXA

Capacitance symbol
Rated voltage

Capacitance symbol
Rated voltage

Ripple current mA r.m.s.
(100kHz, 105°C)

Impedance (Ω)
MAX. at 100kHz, 20°C