

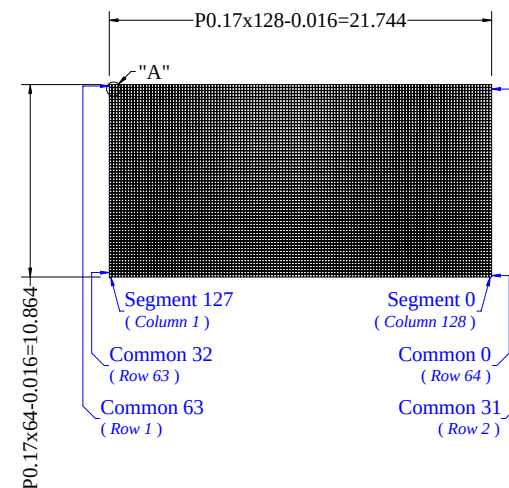


1. Color: White
2. Driver IC: SSD1306
3. FPC Number: UT-0206-P05 
4. Interface:
8-bit 68XX/80XX Parallel, 3-/4-wire SPI, I2C
5. General Tolerance: ± 0.30
6. The total thickness (1.55 Max) is without polarizer protective film & remove tape.
The actual assembled total thickness with above materials should be 1.80 Max.

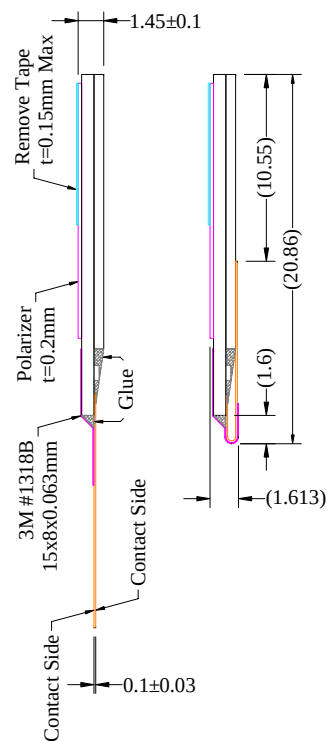

Pin	Symbol
1	N.C. (GND)
2	C2P
3	C2N
4	C1P
5	C1N
6	VBAT
7	N.C.
8	VSS
9	VDD
10	BS0
11	BS1
12	BS2
13	CS#
14	RES#
15	D/C#
16	R/W#
17	E/RD#
18	D0
19	D1
20	D2
21	D3
22	D4
23	D5
24	D6
25	D7
26	IREF
27	VCOMH
28	VCC
29	VLSS
30	N.C. (GND)

Customer Approval Signature	Univision Technology Inc.						Drawing Number		Rev.	
							DMX2864SDGF46		B	
	Unless Otherwise Specified		Title	UG-2864HSWEG01 Folding Type OEL Display Module Pixel Number: 128 x 64, Monochrome, COG Package				Material		
	Unit	mm						Soda Lime / Polyimide		
	General Roughness									
	Tolerance			Drawn	E.E.	Panel / E.	P.M.			
	Dimension	±0.3	By	Humphrey Lin	James Wang	Ivy Lo	Cherry Lin	Scale	Sheet	Size
	Angle	±1	Date	20090120	20090120	20090120	20090120	1:1	1 of 1	A3