




Tutorials

4.13 EXAMPLE 11

MIKROELEKTRONIKA

RS232 serial communication

This example illustrates the use of the microcontroller's EUSART module. Connection to a PC is enabled through the RS232 standard. The program works in the following manner. Every byte received via serial communication is displayed using LED diodes connected to port B and is automatically returned to the transmitter after that. If an error occurs on receive, it will be signalled by switching the LED diode on. The easiest way to test the device operation practically is by using a standard Windows program called *Hyper Terminal*.

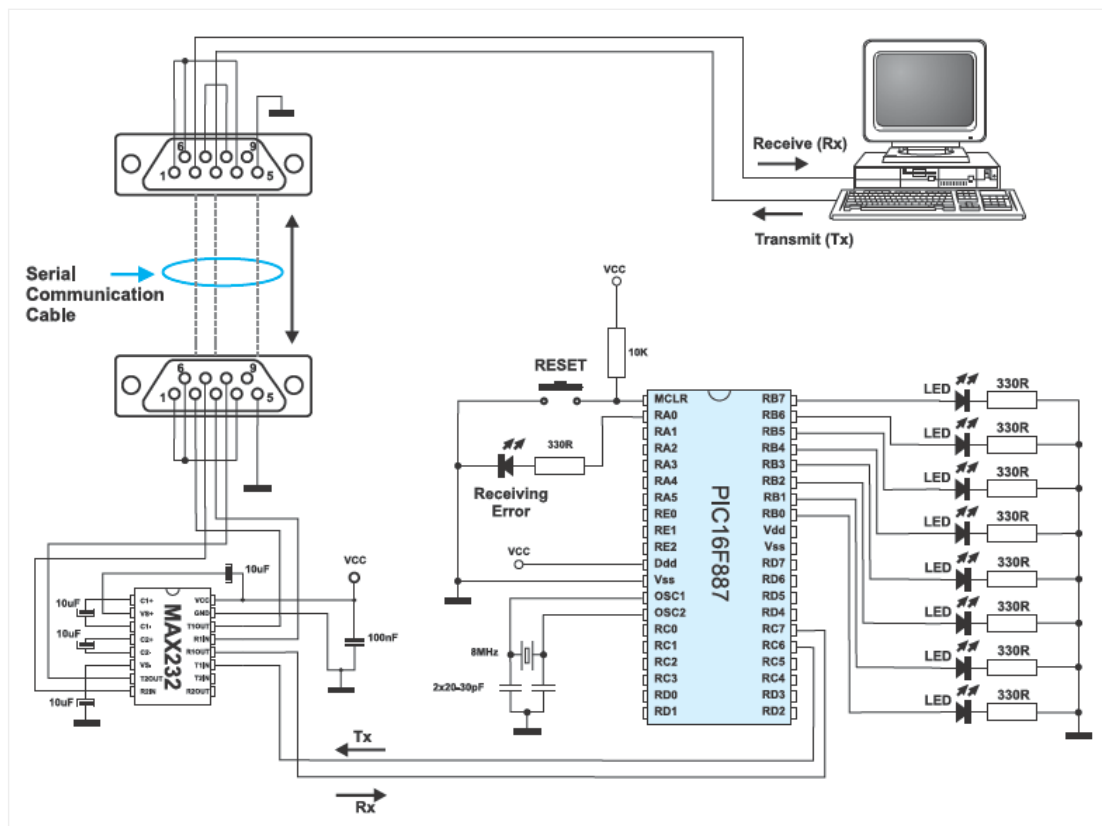

```

1  /*Header*****//
2
3  unsigned short i;
4
5  void main() {
6      UART1_Init(19200); // Initialize USART module
7      // (8 bit, 19200 baud rate, no parity bit...)
8      while (1) {
9          if (UART1_Data_Ready()) { // If data has been received
10             i = UART1_Read(); // read it
11             UART1_Write(i); // and send it back
12         }
13     }
14 }

```

In order to make this example work properly, it is necessary to tick off the UART library in the *Library Manager*

prior to compiling:

- UART



4.13 Example 11 by MikroElektronika is licensed under a Creative Commons Attribution 4.0 International License, except where otherwise noted.