

PRODUKTINFORMATION

Vi reserverar oss mot fel samt förbehåller oss rätten till ändringar utan föregående meddelande

ELFA artikelnr

67-320-52	Ellytkond SMD 22uF/10V	ELV220M10R
67-320-69	Ellytkond SMD 33uF/10V	ELV330M10R
67-320-77	Ellytkond SMD 47uF/10V	ELV470M10R
67-320-85	Ellytkond SMD 100uF/10V	ELV101M10R
67-320-93	Ellytkond SMD 220uF/10V	ELV221M10R
67-321-01	Ellytkond SMD 330uF/10V	ELV331M10R
67-321-19	Ellytkond SMD 470uF/10V	ELV471M10R
67-321-27	Ellytkond SMD 10uF/25V	ELV100M25R
67-321-35	Ellytkond SMD 22uF/25V	ELV220M25R
67-321-43	Ellytkond SMD 33uF/25V	ELV330M25R
67-321-50	Ellytkond SMD 47uF/25V	ELV470M25R
67-321-68	Ellytkond SMD 100uF/25V	ELV101M25R
67-321-76	Ellytkond SMD 220uF/25V	ELV221M25R
67-321-84	Ellytkond SMD 330uF/25V	ELV331M25R
67-321-92	Ellytkond SMD 0,1uF/50V	ELV0R1M50R
67-322-00	Ellytkond SMD 0,22uF/50V	ELVR22M50R
67-322-18	Ellytkond SMD 0,33uF/50V	ELVR33M50R
67-322-26	Ellytkond SMD 0,47uF/50V	ELVR47M50R
67-322-34	Ellytkond SMD 1uF/50V	ELV010M50R
67-322-42	Ellytkond SMD 2,2uF/50V	ELV2R2M50R
67-322-59	Ellytkond SMD 3,3uF/50V	ELV3R3M50R
67-322-67	Ellytkond SMD 4,7uF/50V	ELV4R7M50R
67-322-75	Ellytkond SMD 10uF/50V	ELV100M50R
67-322-83	Ellytkond SMD 22uF/50V	ELV220M50R
67-322-91	Ellytkond SMD 33uF/50V	ELV330M50R
67-323-08	Ellytkond SMD 47uF/50V	ELV470M50R
67-323-09	Ellytkond SMD 47uF/50V	ELV470M50R
67-323-17	Ellytkond SMD 100uF/50V	ELV101M50R

ELV SERIES

- SMD TYPE Rflow Soldering is Available **Series Code=L**
- Life 2000 hours at 85°C
- Available For High Density Mounting

Characteristics

Voltage Range	4 to 100 VDC									
Capacitance Range	0.1 to 1000uF									
Temperature Range	-40 to +85°C									
Capacitance Tolerance	+20% -20% (at 20°C, 120Hz)									
Leakage Current	I≤0.01CV or 3uA, whichever is greater 2 minutes after Rated Voltage applied									
Dissipation Factor (tan δ)Max	Rated Voltage (V)	4	6.3	10	16	25	35	50	63	100
	(tan δ) Dφ4~6.3	0.4	0.26	0.22	0.18	0.16	0.13	0.12	-	-
	(tan δ) Dφ8~10	-	0.35	0.26	0.20	0.16	0.14	0.12	0.12	0.10
	(at 20°C, 120Hz)									
Stability at Low Temperature	Impedance ration at 120Hz									
	Rated Voltage (V)	4	6.3	10	16	25	35	50	63	100
	Z-25°C/Z 20°C	7	4	3	2	2	2	2	2	2
	Z-40°C/Z 20°C	15	8	8	4	4	3	3	3	3
Load Life	After the rated voltage has been applied for 2000 hours at 85°C	Capacitance change				Within ±25% of initial value				
		D.F. tanδ				200% of less of initial specified value				
		Leakage current				Initial specified value of less				
Shelf Life	After storage for 500 hours at 85°C, with no voltage applied and being stabilized at +20°C, Capacitor shall meet the limit specified in load life.									


Case size & Maximum Ripple Current

mA rms 85°C 120Hz

UF	4		6.3		10		16		25		35		50		63		100	
WV	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple	Size	Ripple
0.1													A	1.0				
0.22													A	2.0				
0.33													A	2.8				
0.47													A	4.0				
1													A	8.4				
2.2													A	13				
3.3													A	17				
4.7									A	16	A	18	B	20			E	80
10							A	23	B	27	B	29	C	33			E	90
22			A	28	B	33	B	37	C	42	C	46	D	80	E	75	E	130
33	A	28	B	37	B	41	C	49	C	52	C	58	E	200	E	160	F	170
47	A	33	B	45	C	52	C	58	C	60	D	115	E	240	E	170		
100	B	56	C	70	C	76	C	86	D	160	E	280	F	500	F	240		
220	C	96	D	150	D	190	E	290	E	300	F	570						
330			D	210	E	330	E	330	F	680								
470			E	380	F	680	F	690										
1000			F	700														

Diagram of dimensions


SIZE	Dφ	L	A	C	B	W	P
A	4	5.5	4.3	4.3	5.1	0.5~0.8	1.0
B	5	5.5	5.3	5.3	5.9	0.5~0.8	1.4
C	6.3	5.5	6.6	6.6	7.2	0.5~0.8	2.0
D	8	6.5	8.3	8.3	9.0	0.5~0.8	2.2
E	8	10.5	8.3	8.3	9.0	0.8~1.1	3.1
F	10	10.5	10.3	10.3	11.0	0.8~1.1	4.5

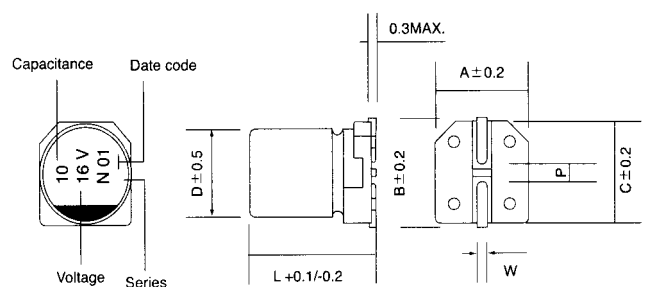

Surface Mount Type Packaging Specifications


Packaging Specifications

- Reel Dimensions in mm(not to scale)

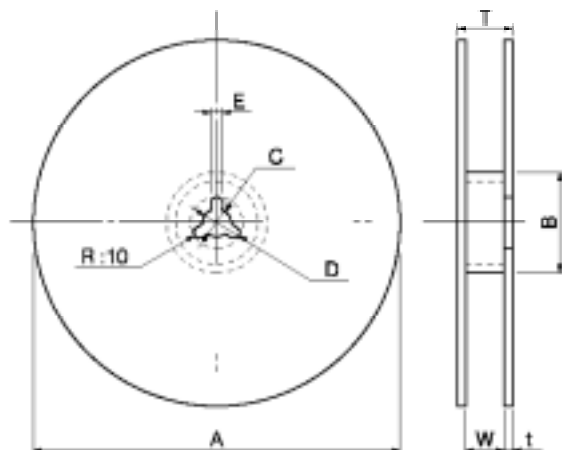

SIZE	A	B	C	D	E	W	t
A,B	380±2	50min	13.0±0.5	21.0±0.8	2.0±0.5	14±1	3.0
C,D	380±2	50min	13.0±0.5	21.0±0.8	2.0±0.5	18±1	3.0
E,F	380±2	50min	13.0±0.5	21.0±0.8	2.0±0.5	26±1	3.0

- Taping Dimensions in mm(not to scale)

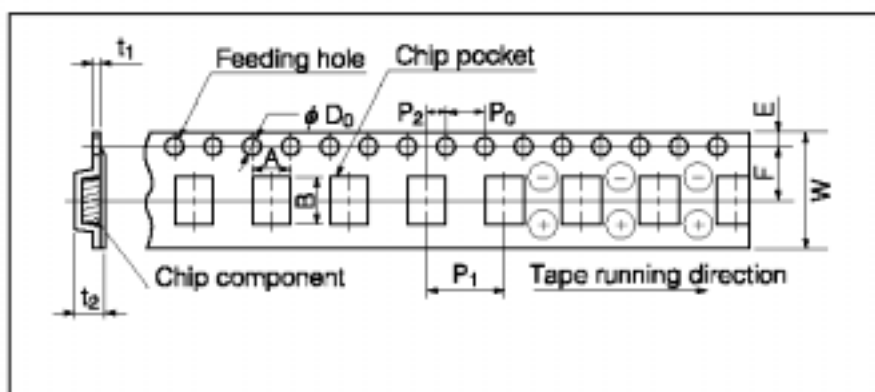

SIZE	W	A	B	P ₀ ±0.1	P ₁	P ₂ ±0.1	F	φD ₀ ^{+0.1}	t ₁	E	t ₂
A	12.0	4.7	4.6	4.0	8.0	2.0	5.5	1.5	0.4	1.75	5.8
B	12.0	5.7	5.7	4.0	12.0	2.0	5.5	1.5	0.4	1.75	5.8
C	16.0	7.0	7.0	4.0	12.0	2.0	5.5	1.5	0.4	1.75	5.8
D	16.0	8.7	8.7	4.0	12.0	2.0	7.5	1.5	0.4	1.75	6.8
E	24.0	8.7	8.7	4.0	16.0	2.0	11.5	1.5	0.4	1.75	11.0
F	24.0	10.7	10.7	4.0	16.0	2.0	11.5	1.5	0.4	1.75	11.0

Packaging Quantity

SIZE CODE	Dφ	L	Inner Packaging	Outer Packaging
A	4	5.5	2,000	20,000
B	5	5.5	1,000	10,000
C	6.3	5.5	1,000	10,000
D	8	6.5	1,000	10,000
E	8	10.5	500	3,000
F	10	10.5	500	3,000