

PRODUKTINFORMATION

Vi reserverar oss mot fel samt förbehåller oss rätten till ändringar utan föregående meddelande

ELFA artikelnr

67-300-14 Ellytkond SMD 22uF/6V
67-300-30 Ellytkond SMD 47uF/6V
67-301-54 Ellytkond SMD 100uF/10V
67-302-12 Ellytkond SMD 10uF/16V
67-302-20 Ellytkond SMD 10uF/16V
67-302-38 Ellytkond SMD 22uF/16V
67-303-11 Ellytkond SMD 4,7uF/25V
67-304-36 Ellytkond SMD 4,7uF/35V
67-304-44 Ellytkond SMD 10uF/35V
67-304-51 Ellytkond SMD 22uF/35V
67-305-50 Ellytkond SMD 1uF/50V
67-305-68 Ellytkond SMD 1uF/50V
67-305-84 Ellytkond SMD 2,2uF/50V
67-306-00 Ellytkond SMD 4,7uF/50V
67-306-18 Ellytkond SMD 10uF/50V


67-311-37 Ellytkond SMD 330uF/16V
67-311-45 Ellytkond SMD 470uF/16V
67-312-10 Ellytkond SMD 47uF/25V
67-312-44 Ellytkond SMD 330uF/25V
67-313-35 Ellytkond SMD 100uF/35V
67-314-26 Ellytkond SMD 33uF/50V
67-314-42 Ellytkond SMD 100uF/50V

RV2 Vertical Chip Electrolytic Capacitors

Series RV2 Chip Aluminum Electrolytic Capacitors.

- For surface mount 85°C, 2000 hours guaranteed.
- Carrier taping supplied.

Outline Drawing

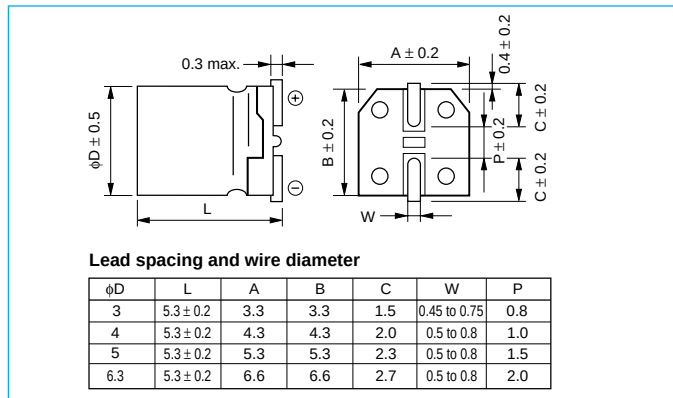

Unit: mm

Photo



Specifications

No.	Item	Performance																																													
1	Temperature range (°C)	−40 to +85°C																																													
2	Leakage current (μA)	Less than 0.01 CV or 3 whichever is larger (after two minutes) C: Capacitance (μF), V: Voltage (V) (20°C)																																													
3	Capacitance tolerance (%)	±20 (20°C, 120 Hz)																																													
4	Tangent of loss angle (tan δ)	<table><tr><th colspan="2">Rated voltage (V)</th><th>4</th><th>6.3</th><th>10</th><th>16</th><th>25</th><th>35</th><th>50</th></tr><tr><td rowspan="2">tan δ</td><td>φ 3</td><td>0.42</td><td>0.30</td><td>0.24</td><td>0.22</td><td>0.16</td><td>0.14</td><td>0.12</td></tr><tr><td>φ 4–φ 6.3</td><td>0.42</td><td>0.28</td><td>0.24</td><td>0.20</td><td>0.14</td><td>0.12</td><td>0.10</td></tr></table> (20°C, 120 Hz)	Rated voltage (V)		4	6.3	10	16	25	35	50	tan δ	φ 3	0.42	0.30	0.24	0.22	0.16	0.14	0.12	φ 4–φ 6.3	0.42	0.28	0.24	0.20	0.14	0.12	0.10																			
Rated voltage (V)		4	6.3	10	16	25	35	50																																							
tan δ	φ 3	0.42	0.30	0.24	0.22	0.16	0.14	0.12																																							
	φ 4–φ 6.3	0.42	0.28	0.24	0.20	0.14	0.12	0.10																																							
5	Stability at low temperature	<table><tr><th colspan="3">Rated voltage (V)</th><th>4</th><th>6.3</th><th>10</th><th>16</th><th>25</th><th>35</th><th>50</th></tr><tr><td rowspan="4">Impedance ratio</td><td rowspan="2">φ 3</td><td>Z–25°C/Z+20°C</td><td>7</td><td>4</td><td>3</td><td>2</td><td>2</td><td>2</td><td>2</td></tr><tr><td>Z–40°C/Z+20°C</td><td>17</td><td>10</td><td>8</td><td>6</td><td>4</td><td>3</td><td>3</td></tr><tr><td rowspan="2">φ 4~φ 6.3</td><td>Z–25°C/Z+20°C</td><td>7</td><td>3</td><td>3</td><td>2</td><td>2</td><td>2</td><td>2</td></tr><tr><td>Z–40°C/Z+20°C</td><td>15</td><td>8</td><td>5</td><td>4</td><td>3</td><td>3</td><td>3</td></tr></table> (120 Hz)	Rated voltage (V)			4	6.3	10	16	25	35	50	Impedance ratio	φ 3	Z–25°C/Z+20°C	7	4	3	2	2	2	2	Z–40°C/Z+20°C	17	10	8	6	4	3	3	φ 4~φ 6.3	Z–25°C/Z+20°C	7	3	3	2	2	2	2	Z–40°C/Z+20°C	15	8	5	4	3	3	3
Rated voltage (V)			4	6.3	10	16	25	35	50																																						
Impedance ratio	φ 3	Z–25°C/Z+20°C	7	4	3	2	2	2	2																																						
		Z–40°C/Z+20°C	17	10	8	6	4	3	3																																						
	φ 4~φ 6.3	Z–25°C/Z+20°C	7	3	3	2	2	2	2																																						
		Z–40°C/Z+20°C	15	8	5	4	3	3	3																																						
6	Endurance (85°C) (Applied ripple current)	<table><tr><td>Test time</td><td>2000 hrs (φ 3 is 1000hrs)</td></tr><tr><td>Leakage current</td><td>Initial specified value or less</td></tr><tr><td>Change in capacitance</td><td>Within ±20% of initial value (4V:±30%)</td></tr><tr><td>tan δ</td><td>200% or less of initial specified value (4V:300%)</td></tr></table>	Test time	2000 hrs (φ 3 is 1000hrs)	Leakage current	Initial specified value or less	Change in capacitance	Within ±20% of initial value (4V:±30%)	tan δ	200% or less of initial specified value (4V:300%)																																					
Test time	2000 hrs (φ 3 is 1000hrs)																																														
Leakage current	Initial specified value or less																																														
Change in capacitance	Within ±20% of initial value (4V:±30%)																																														
tan δ	200% or less of initial specified value (4V:300%)																																														
7	Max. storage temp. (85°C)	Test time 1000 hrs. Others have same as endurance in No. 6, Voltag application treatment.																																													
8	Applicable Standards	JIS C 5101-1, 5101-18 1998 (IEC 60384-1 1992, 60384-18 1993)																																													

Coefficients of Frequency for Ripple Current

Frequency (Hz)	50 • 60	120	1 k	10 k • 100 k
Rated Voltage (V)				
4 to 16	0.80	1	1.15	1.25
25 to 35	0.80	1	1.25	1.40
50	0.80	1	1.35	1.50

Coefficients of Temperature for Ripple Current

Temperature (°C)	+70 or less	+85
Coefficients	1.35	1

RV2 Vertical Chip Electrolytic Capacitors

Case size by working voltage & capacitance (in mm)

(mm)

WV(V) Cap.(μF)	4	6.3	10	16	25	35	50
0.1							3 x 5.3 4 x 5.3
0.22							3 x 5.3 4 x 5.3
0.33							3 x 5.3 4 x 5.3
0.47							3 x 5.3 4 x 5.3
1							3 x 5.3 4 x 5.3
2.2						3 x 5.3	4 x 5.3
3.3						3 x 5.3	4 x 5.3
4.7					3x5.3 4x5.3	4 x 5.3	5 x 5.3
10			4 x 5.3	3x5.3 4x5.3	5 x 5.3	5 x 5.3	6.3 x 5.3
22	3 x 5.3	4 x 5.3	5 x 5.3	5 x 5.3	6.3 x 5.3	6.3 x 5.3	
33	4 x 5.3	5 x 5.3	5 x 5.3	6.3 x 5.3	6.3 x 5.3		
47	4 x 5.3	5 x 5.3	6.3 x 5.3	6.3 x 5.3			
100	5 x 5.3	6.3 x 5.3	6.3 x 5.3	6.3 x 5.3			
220	6.3 x 5.3						

Standard Ratings

ELNA PART NO. / WV (V)	CAP. (μF)	SIZE (φ x L) (mm)	tan δ	ESR (Ω)	Ripple Current (mA rms)
4 V					
RV2-4V220MB55-R	22	3 x 5.3	0.42	32	14
RV2-4V330M-R	33	4 x 5.3	0.42	21	31
RV2-4V470M-R	47	4 x 5.3	0.42	15	37
RV2-4V101M-R	100	5 x 5.3	0.42	7.0	63
RV2-4V221M-R	220	6.3 x 5.3	0.42	3.2	110
6.3 V					
RV2-6V220M-R	22	4 x 5.3	0.28	21	31
RV2-6V330M-R	33	5 x 5.3	0.28	14	44
RV2-6V470M-R	47	5 x 5.3	0.28	10	52
RV2-6V101M-R	100	6.3 x 5.3	0.28	5.0	89
10 V					
RV2-10V100M-R	10	4 x 5.3	0.24	40	23
RV2-10V220M-R	22	5 x 5.3	0.24	18	39
RV2-10V330M-R	33	5 x 5.3	0.24	12	48
RV2-10V470M-R	47	6.3 x 5.3	0.24	8.5	67
RV2-10V101M-R	100	6.3 x 5.3	0.24	4.0	98
16 V					
RV2-16V100MB55-R	10	3 x 5.3	0.22	37	18
RV2-16V100M-R	10	4 x 5.3	0.20	33	26
RV2-16V220M-R	22	5 x 5.3	0.20	15	44
RV2-16V330M-R	33	6.3 x 5.3	0.20	10	63
RV2-16V470M-R	47	6.3 x 5.3	0.20	7.1	75
RV2-16V101MS-R	100	6.3 x 5.3	0.20	3.3	103
25 V					
RV2-25V4R7MB55-R	4.7	3 x 5.3	0.16	57	11

ELNA PART NO. / WV (V)	CAP. (μF)	SIZE (φ x L) (mm)	tan δ	ESR (Ω)	Ripple Current (mA rms)
RV2-25V4R7M-R	4.7	4 x 5.3	0.14	49	19
RV2-25V100M-R	10	5 x 5.3	0.14	23	32
RV2-25V220M-R	22	6.3 x 5.3	0.14	11	55
RV2-25V330M-R	33	6.3 x 5.3	0.14	7.0	67
35 V					
RV2-35V2R2MB55-R	2.2	3 x 5.3	0.14	106	8
RV2-35V3R3MB55-R	3.3	3 x 5.3	0.14	70	9
RV2-35V4R7M-R	4.7	4 x 5.3	0.12	42	20
RV2-35V100M-R	10	5 x 5.3	0.12	20	34
RV2-35V220M-R	22	6.3 x 5.3	0.12	9.1	59
50 V					
RV2-50VR10MB55-R	0.1	3 x 5.3	0.12	1990	1
RV2-50VR10M-R	0.1	4 x 5.3	0.10	1660	3
RV2-50VR22MB55-R	0.22	3 x 5.3	0.12	905	2
RV2-50VR22M-R	0.22	4 x 5.3	0.10	754	5
RV2-50VR33MB55-R	0.33	3 x 5.3	0.12	603	3
RV2-50VR33M-R	0.33	4 x 5.3	0.10	503	6
RV2-50VR47MB55-R	0.47	3 x 5.3	0.12	424	4
RV2-50VR47M-R	0.47	4 x 5.3	0.10	353	7
RV2-50V010MB55-R	1	3 x 5.3	0.12	199	6
RV2-50V010M-R	1	4 x 5.3	0.10	166	10
RV2-50V2R2M-R	2.2	4 x 5.3	0.10	75	15
RV2-50V3R3M-R	3.3	4 x 5.3	0.10	50	19
RV2-50V4R7M-R	4.7	5 x 5.3	0.10	35	26
RV2-50V100M-R	10	6.3 x 5.3	0.10	17	44


Note: ESR 120 Hz at 20°C. Allowable Ripple Current 120 Hz at 85°C

RV Vertical Chip Electrolytic Capacitors

Series RV Chip Aluminum Electrolytic Capacitors.

- For surface mount 85°C, large capacitance and series up to 1000μF.
- Carrier taping supplied.

Outline Drawing

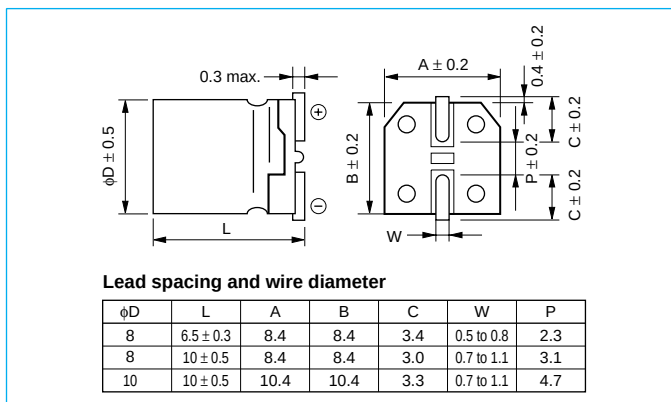

Unit: mm

Photo



Specifications

No.	Item	Performance																										
1	Temperature range (°C)	−40 to +85°C																										
2	Leakage current (μA)	Less than 0.01 CV or 3 whichever is larger (after two minutes) C: Capacitance (μF), V: Voltage (V) (20°C)																										
3	Capacitance tolerance (%)	±20 (20°C, 120 Hz)																										
4	Tangent of loss angle (tan δ)	<table><tr><td>Rated voltage (V)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>100</td></tr><tr><td>tan δ</td><td>0.28</td><td>0.24</td><td>0.20</td><td>0.14</td><td>0.12</td><td>0.10</td><td>0.10</td><td>0.10</td></tr></table>	Rated voltage (V)	6.3	10	16	25	35	50	63	100	tan δ	0.28	0.24	0.20	0.14	0.12	0.10	0.10	0.10								
		Rated voltage (V)	6.3	10	16	25	35	50	63	100																		
tan δ	0.28	0.24	0.20	0.14	0.12	0.10	0.10	0.10																				
(20°C, 120 Hz)																												
5	Stability at low temperature	<table><tr><td>Rated voltage (V)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>100</td></tr><tr><td rowspan="2">Impedance ratio</td><td>Z−25°C/Z+20°C</td><td>4</td><td>3</td><td>2</td><td>2</td><td>2</td><td>2</td><td>2</td></tr><tr><td>Z−40°C/Z+20°C</td><td>8</td><td>5</td><td>4</td><td>3</td><td>3</td><td>3</td><td>3</td></tr></table>	Rated voltage (V)	6.3	10	16	25	35	50	63	100	Impedance ratio	Z−25°C/Z+20°C	4	3	2	2	2	2	2	Z−40°C/Z+20°C	8	5	4	3	3	3	3
		Rated voltage (V)	6.3	10	16	25	35	50	63	100																		
		Impedance ratio	Z−25°C/Z+20°C	4	3	2	2	2	2	2																		
Z−40°C/Z+20°C	8		5	4	3	3	3	3																				
(120 Hz)																												
6	Endurance (85°C) (Applied ripple current)	<table><tr><td>Test time</td><td>2000 hrs</td></tr><tr><td>Leakage current</td><td>Initial specified value or less</td></tr><tr><td>Change in capacitance</td><td>Within ±20% of initial value</td></tr><tr><td>tan δ</td><td>200% or less of initial specified value</td></tr></table>	Test time	2000 hrs	Leakage current	Initial specified value or less	Change in capacitance	Within ±20% of initial value	tan δ	200% or less of initial specified value																		
		Test time	2000 hrs																									
		Leakage current	Initial specified value or less																									
		Change in capacitance	Within ±20% of initial value																									
tan δ	200% or less of initial specified value																											
7	Max. storage temp. (85°C)	Test time 1000 hrs. Others have same as endurance. Voltage application treatment.																										
8	Applicable Standards	JIS C 5101-1, 5101-18 1998 (IEC 60384-1 1992, 60384-18 1993)																										

Coefficients of Frequency for Ripple Current

Frequency (Hz) / Rated Voltage (V)	50 • 60	120	1 k	10 k • 100 k
6.3 to 16	0.80	1	1.15	1.25
25 to 35	0.80	1	1.25	1.40
50 to 63	0.80	1	1.35	1.50
100	0.70	1	1.35	1.50

Coefficients of Temperature for Ripple Current

Temperature (°C)	+70 or less	+85
Coefficients	1.35	1

RV Vertical Chip Electrolytic Capacitors

Case size by working voltage & capacitance (in mm)

(mm)

WV(V) Cap.(μF)	6.3	10	16	25	35	50	63	100
10								8 x 10
22						8 x 6.5	8 x 10	10 x 10
33					8 x 6.5	8 x 6.5	8 x 10	10 x 10
47				8 x 6.5	8 x 6.5	8 x 10	10 x 10	
68							10 x 10	
100		8 x 6.5	8 x 6.5	8 x 6.5	8 x 10	10 x 10		
220	8 x 6.5	8 x 6.5	8 x 10	8 x 10	10 x 10			
330	8 x 6.5	8 x 10	8 x 10	10 x 10				
470	8 x 10	10 x 10	10 x 10					
1000	10 x 10							

Standard Ratings

ELNA PART NO. / WV (V)	CAP. (μF)	SIZE (φ x L) (mm)	tan δ	ESR (Ω)	Ripple Current (mA rms)
6.3 V					
RV-6V221MG68-R	220	8 x 6.5	0.28	2.1	155
RV-6V331MG68-R	330	8 x 6.5	0.28	1.4	155
RV-6V471MG10-R	470	8 x 10	0.28	0.99	252
RV-6V102MH10-R	1000	10 x 10	0.28	0.46	458
10 V					
RV-10V101MG68-R	100	8 x 6.5	0.24	4.0	155
RV-10V221MG68-R	220	8 x 6.5	0.24	1.8	155
RV-10V331MG10-R	330	8 x 10	0.24	1.2	252
RV-10V471MH10-R	470	10 x 10	0.24	0.85	458
16 V					
RV-16V101MG68-R	100	8 x 6.5	0.20	3.3	155
RV-16V221MG10-R	220	8 x 10	0.20	1.5	252
RV-16V331MG10-R	330	8 x 10	0.20	1.0	252
RV-16V471MH10-R	470	10 x 10	0.20	0.71	458
25 V					
RV-25V470MG68-R	47	8 x 6.5	0.14	4.9	155
RV-25V101MG68-R	100	8 x 6.5	0.14	2.3	155
RV-25V221MG10-R	220	8 x 10	0.14	1.1	252
RV-25V331MH10-R	330	10 x 10	0.14	0.70	458

ELNA PART NO. / WV (V)	CAP. (μF)	SIZE (φ x L) (mm)	tan δ	ESR (Ω)	Ripple Current (mA rms)
35 V					
RV-35V330MG68-R	33	8 x 6.5	0.12	6.0	155
RV-35V470MG68-R	47	8 x 6.5	0.12	4.2	155
RV-35V101MG10-R	100	8 x 10	0.12	2.0	252
RV-35V221MH10-R	220	10 x 10	0.12	0.91	458
50 V					
RV-50V220MG68-R	22	8 x 6.5	0.10	7.5	155
RV-50V330MG68-R	33	8 x 6.5	0.10	5.0	155
RV-50V470MG10-R	47	8 x 10	0.10	3.5	252
RV-50V101MH10-R	100	10 x 10	0.10	1.7	458
63 V					
RV-63V220MG10-R	22	8 x 10	0.10	7.5	139
RV-63V330MG10-R	33	8 x 10	0.10	5.0	139
RV-63V470MH10-R	47	10 x 10	0.10	3.5	226
RV-63V680MH10-R	68	10 x 10	0.10	2.4	226
100 V					
RV-100V100MG10-R	10	8 x 10	0.10	16.6	94
RV-100V220MH10-R	22	10 x 10	0.10	7.5	189
RV-100V330MH10-R	33	10 x 10	0.10	5.0	189

Note: ESR 120 Hz at 20°C

Allowable Ripple Current 120 Hz at 85°C