







DO NOT SCALE
DIMENSIONS IN mm

METRIC

THIRD ANGLE
PROJECTION

NOTES:

- 1 FOR APPLICATION INFORMATION SEE AMP SPEC. 114-19019.
- 2 FOR PERFORMANCE REQUIREMENTS SEE AMP SPEC. 108-19054.
- 3 TOLERANCES UNLESS OTHERWISE SPECIFIED: $\pm 0,15$.
- 4 BULK PACKAGING: TRUE POSITIONING OF THE SOLDER TINES IS NOT GUARANTEED.

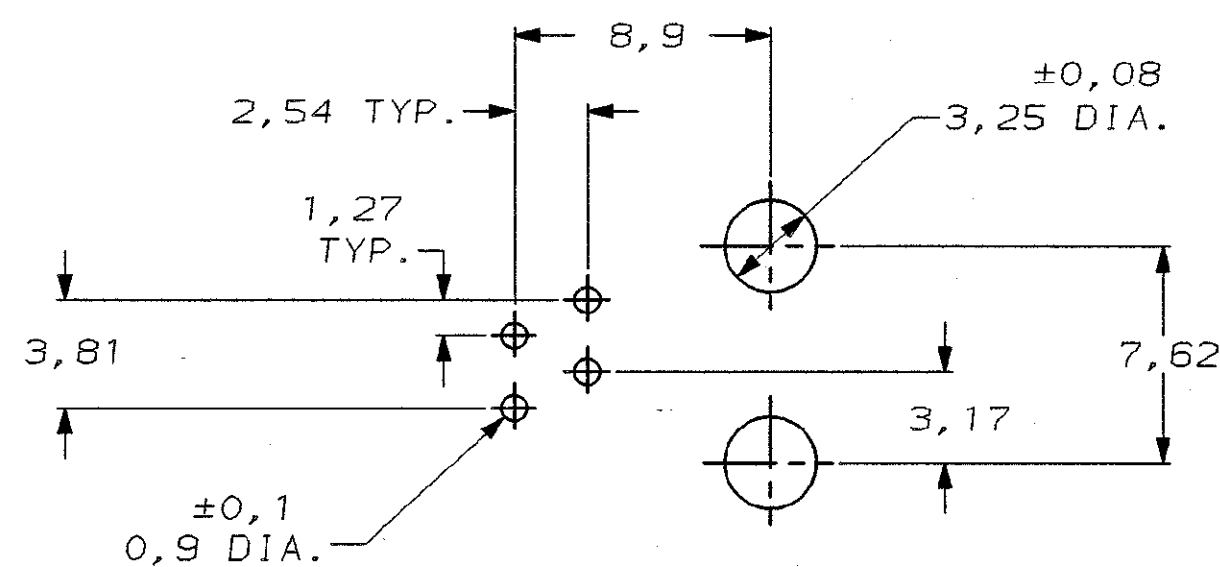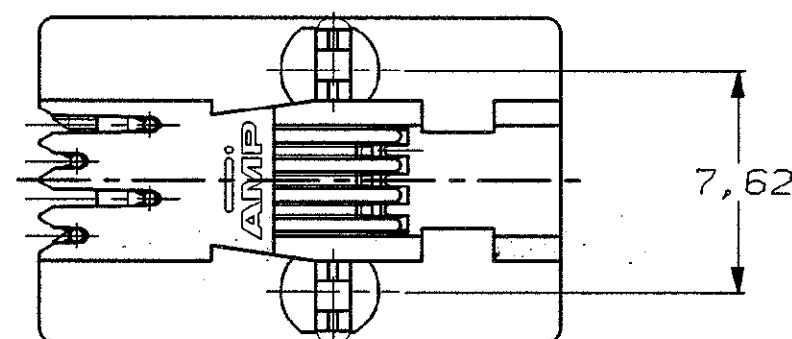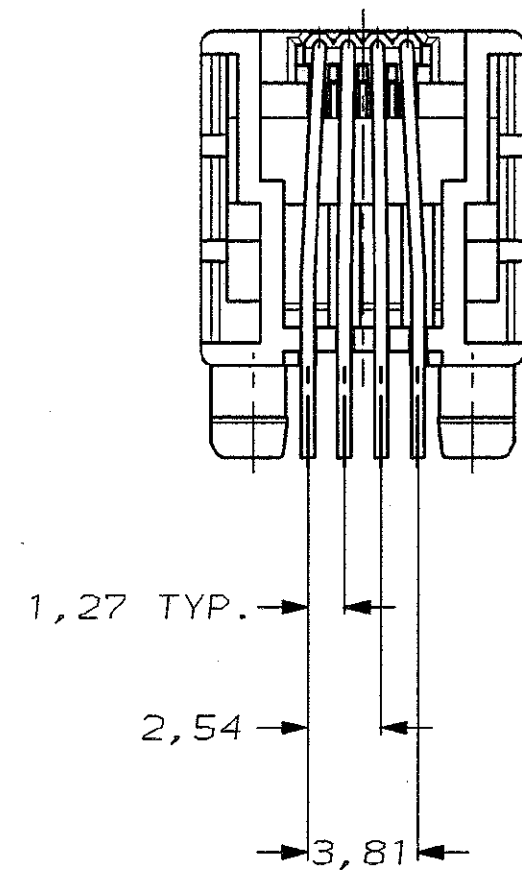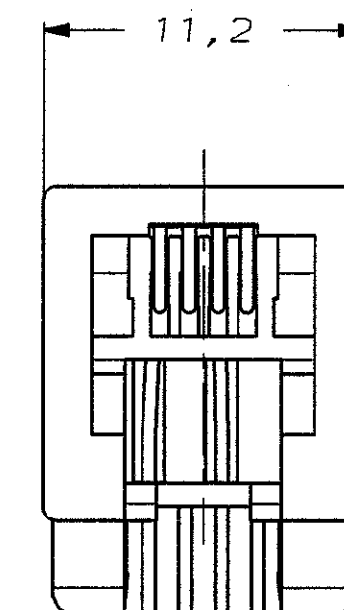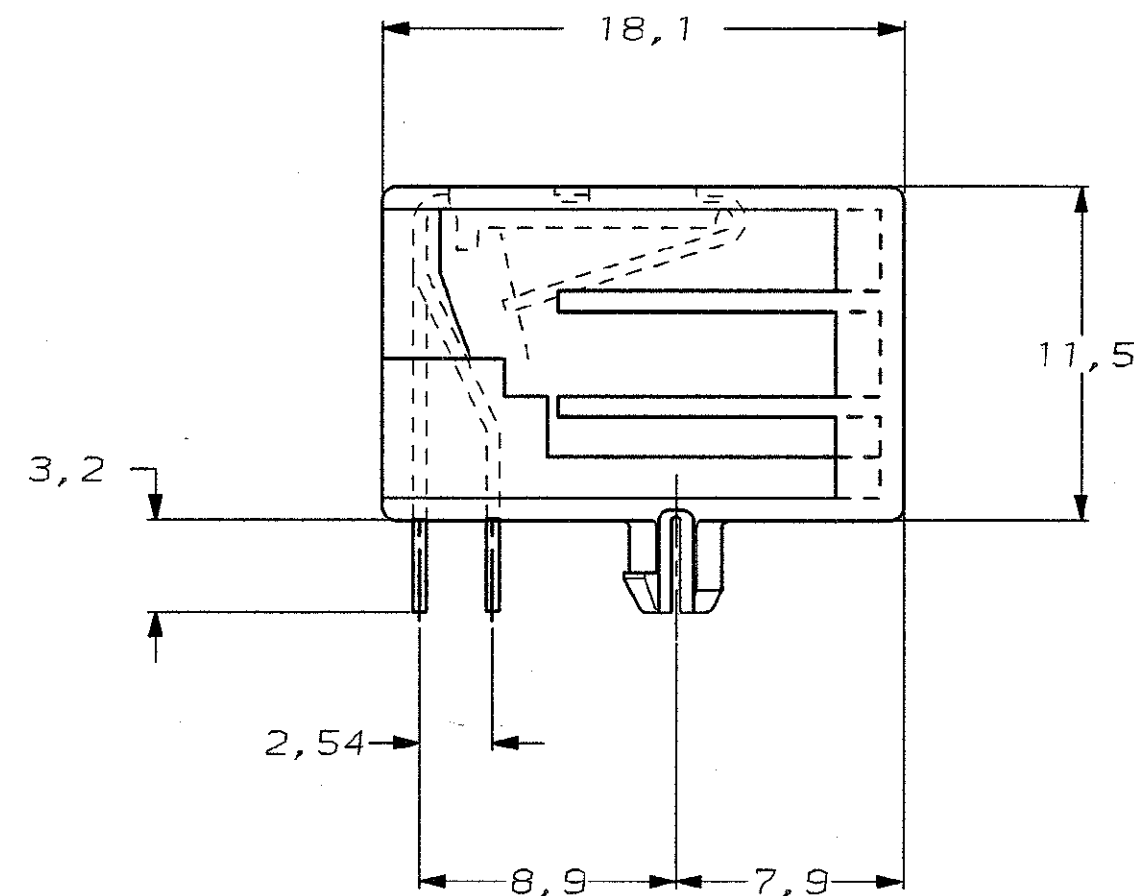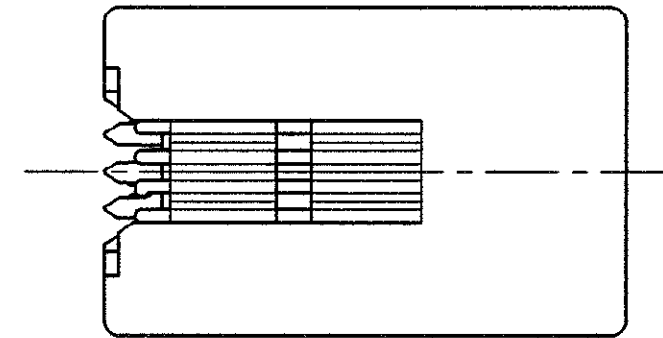

PRINTED CIRCUIT BOARD LAYOUT

[VIEW SHOWN IS CIRCUIT (NONCOMPONENT) SIDE OF BOARD.]
PRINTED CIRCUIT BOARD THICKNESS: 1,6 mm NOMINAL.
TOLERANCES UNLESS OTHERWISE SPECIFIED: $\pm 0,05$

IN CONTACT AREA: 1,2µm MIN. SEL. GOLD OVER 1,2µm MIN. NICKEL. SOLDER TINES: 2,5µm MIN. TIN-LEAD OVER 1,2µm MIN. NICKEL.	HOUSING, COLOR BLACK; PBT 20% GF, UL 94V-0 CONTACT INSERT: PBT, UL 94V-0 CONTACTS: PH. BRONZE	PACKAGED 50 PCS IN ONE TUBE	3-215875-1
		BULK PACKAGED IN A BOX 	2-215875-1
		126 PIECES IN MULTI-TUBE	1-215875-1
		TAPE MOUNTED 1000 PCS./REEL	215875-1
FINISH	MATERIAL	PACKAGING	PARTNUMBER


					CUSTOMER DRAWING		FOR REFERENCE ONLY WILL NOT BE UPDATED	
P	EH-0402-97	EVE	MVE	18 APR 97	©	COPYRIGHT 19-- BY AMP HOLLAND B.V.		
N	EH-0530-96	G.C	G.C	25-04-96	ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN AND/OR PATENTS PENDING.			
M	EH-1287-95	G.C	G.C	28-10-95	THIS DRAWING IS UNPUBLISHED RELEASED FOR PUBLICATION			
L	H-7677	C.S	C.S	27-02-95			AMP HOLLAND B.V. s-Hertogenbosch, The Netherlands.	
K	H-7677	G.C	J.T.	15-02-95	NAME			
J	H-7677	DK	J.T.	15-01-92	MODULAR JACK SIDE ENTRY 4/4 FOR PRINTED CIRCUIT BOARD.			
LTR.	REVISION RECORD	DR.	CHK.	DATE				

DR.:	J.V.LIEMPT.	CHK.:	J.TUIN.	APP.:	L.V.SOEST.	DWG.No.	C-215875	REV.LTR.	P	SHEET	1 OF 1	A2
DATE:	15 OKT 1991	DATE:		DATE:	03-02-92							

DO NOT SCALE
DIMENSIONS IN mm







METRIC

THIRD ANGLE
PROJECTION



NOTES:

- 1 SEE SHEET 2 FOR MODULAR JACK 6 POS./4 CONTACTS.
- 2 FOR APPLICATION INFORMATION SEE AMP SPEC. 114-19019.
- 3 FOR PERFORMANCE REQUIREMENTS SEE AMP SPEC. 108-19064.
- 4 TOLERANCES UNLESS OTHERWISE SPECIFIED: $\pm 0,15$
- 5 TRUE POSITIONING WILL NOT BE GUARANTEED, USING THIS PACKAGING TYPE.

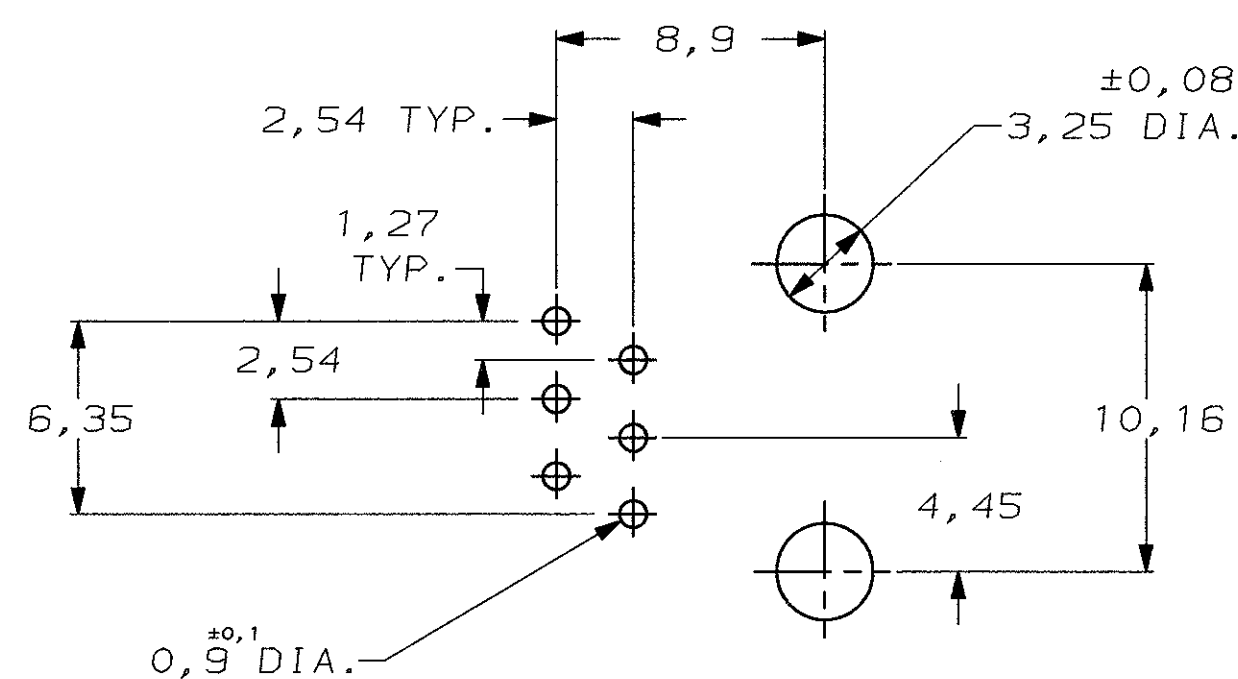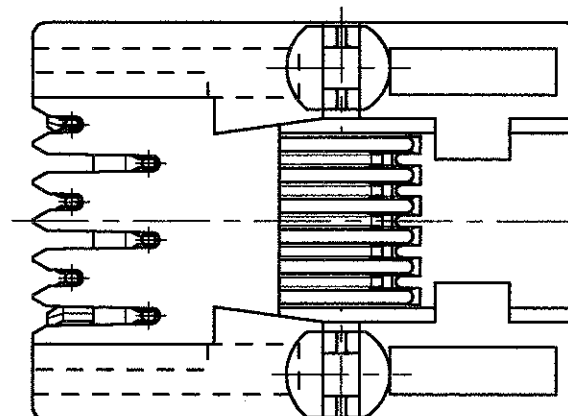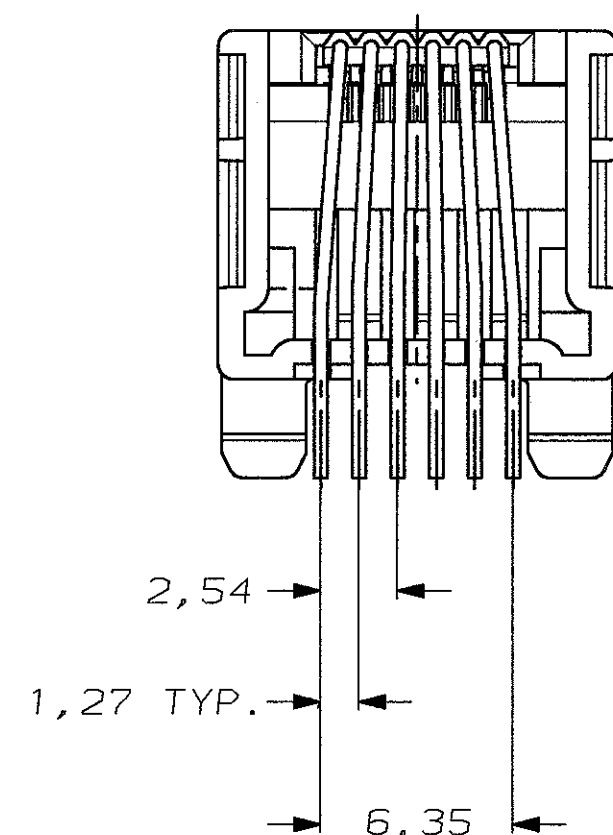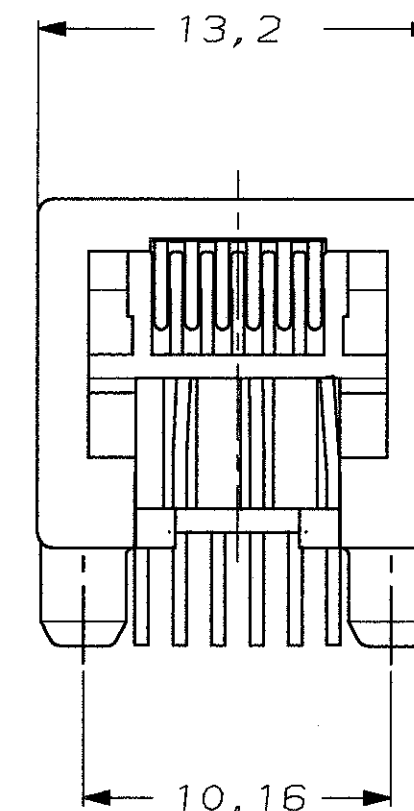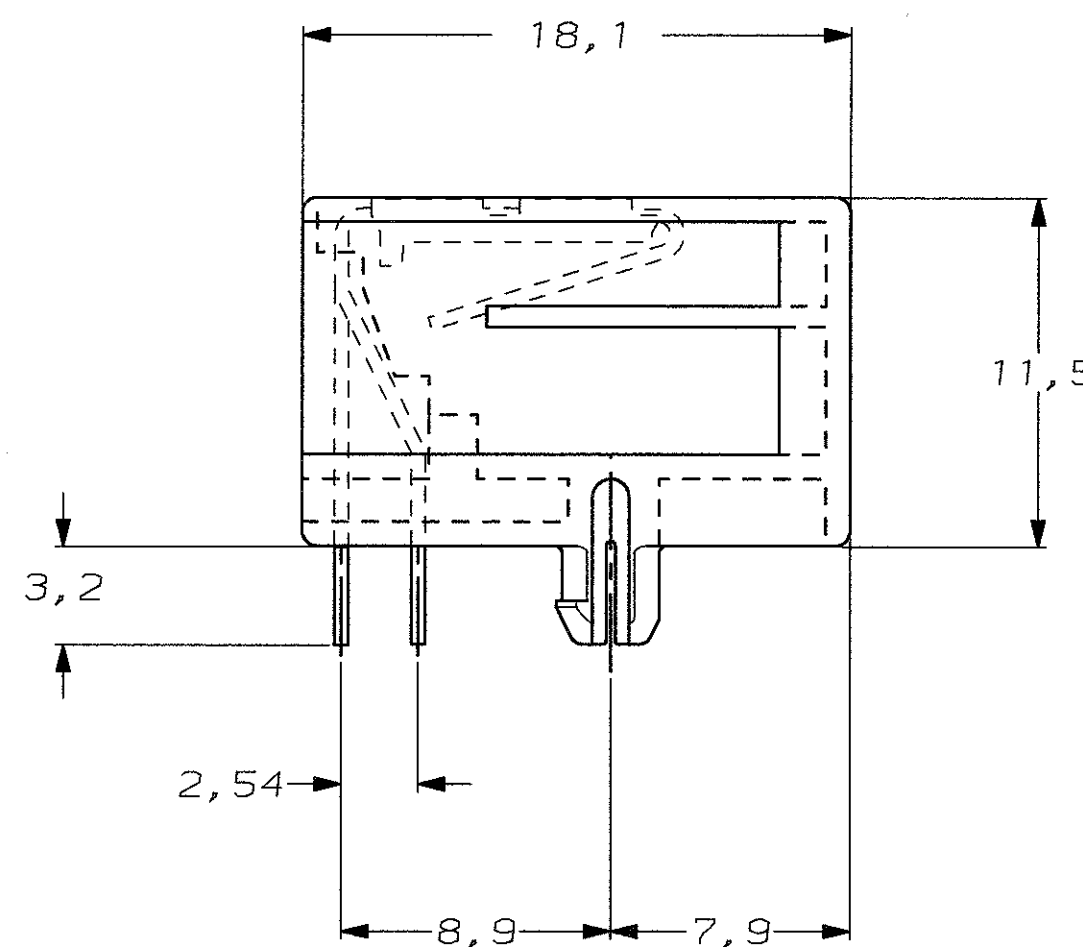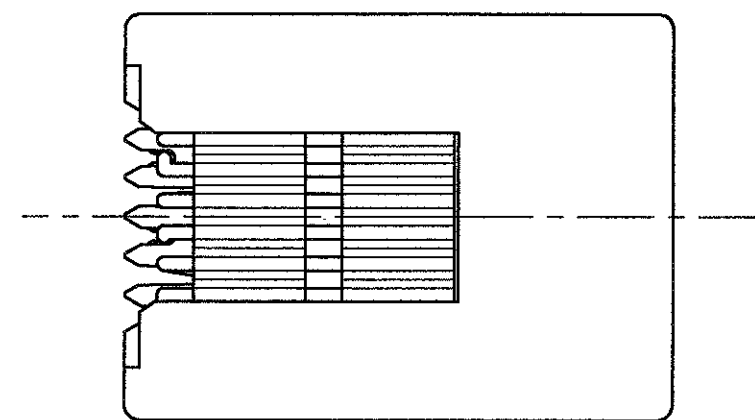

PRINTED CIRCUIT BOARD LAYOUT (6 POS./6 CONTACTS)

[VIEW SHOWN IS CIRCUIT (NONCOMPONENT) SIDE OF BOARD.]

PRINTED CIRCUIT BOARD THICKNESS: 1,6 mm NOMINAL.

TOLERANCES UNLESS OTHERWISE SPECIFIED: $\pm 0,05$

250 PIECES IN TRAY	6 POS./6 CONTACTS	IN CONTACT AREA: 1,2 μ m MIN. SEL. GOLD OVER 1,2 μ m MIN. NICKEL. SOLDER TINES: 2,5 μ m MIN. TIN-LEAD OVER 1,2 μ m MIN. NICKEL.	HOUSING COLOR BLACK; HOUSING AND CONTACT INSERT: RE-FLOW TEMPERATURE RESISTANT PA 4.6, UL 94V-0 CONTACTS: Ph BRONZE	2-215876-0
TAPE MOUNTED 800 PCS./REEL				1-215876-0
BULK PACKED 5 1000 PCS IN ONE BOX			HOUSING COLOR BLACK; PBT, UL 94 V-0 CONTACT INSERT: PBT, UL 94V-0 CONTACTS: Ph BRONZE	3-215876-1
250 PIECES IN TRAY				1-215876-3
108 PIECES IN MULTI-TUBE				1-215876-1
TAPE MOUNTED 800 PCS./REEL				215876-1
PACKAGING	REMARKS	FINISH	MATERIAL	ORDER NUMBER






CUSTOMER DRAWING				FOR REFERENCE ONLY WILL NOT BE UPDATED.			
© COPYRIGHT 19- BY AMP HOLLAND B.V.				ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN AND/OR PATENTS PENDING.			
THIS DRAWING IS UNPUBLISHED RELEASED FOR PUBLICATION				,19			
AMP				AMP HOLLAND B.V. 's-Hertogenbosch, The Netherlands.			
NAME				MODULAR JACK, SIDE ENTRY, 6/6 FOR PRINTED CIRCUIT BOARD.			
DR.: 6. CONSTANT	CHK.: 6. CONSTANT	APP.: R. SHEETS	DWG.No.	REV.LTR.	SHEET		
DATE: 24 SEP 96	DATE: 24 SEP 96	DATE: -	C-215876	U	1 OF 3	A2	

DO NOT SCALE
DIMENSIONS IN mm

METRIC

THIRD ANGLE
PROJECTION

- NOTE :
1. SEE SHEET 1 FOR MODULAR JACK 6 POS./6 CONTACTS.
 2. FOR APPLICATION INFORMATION SEE AMP SPEC. 114-19019.
 3. FOR PERFORMANCE REQUIREMENTS SEE AMP SPEC. 108-19064.
 4. TOLERANCES UNLESS OTHERWISE SPECIFIED: $\pm 0,15$.

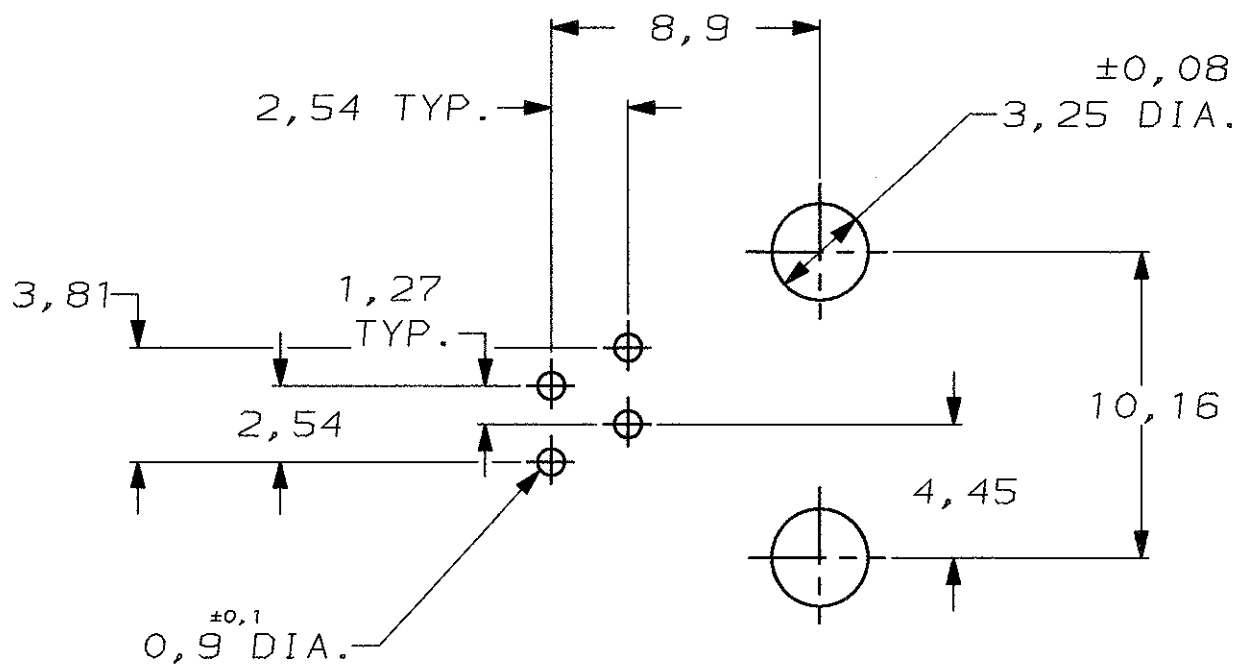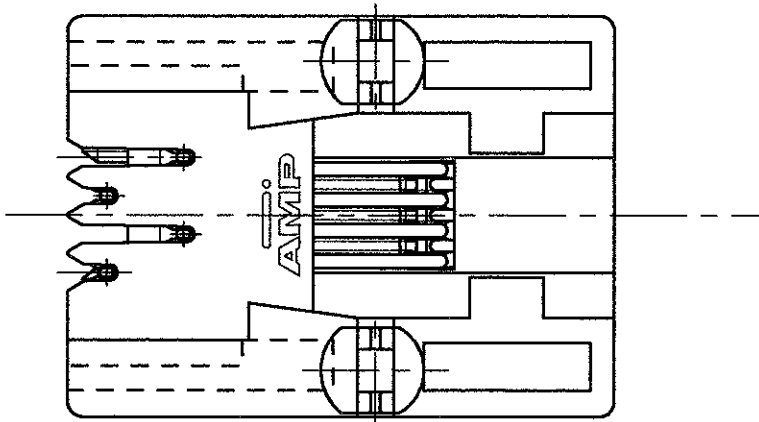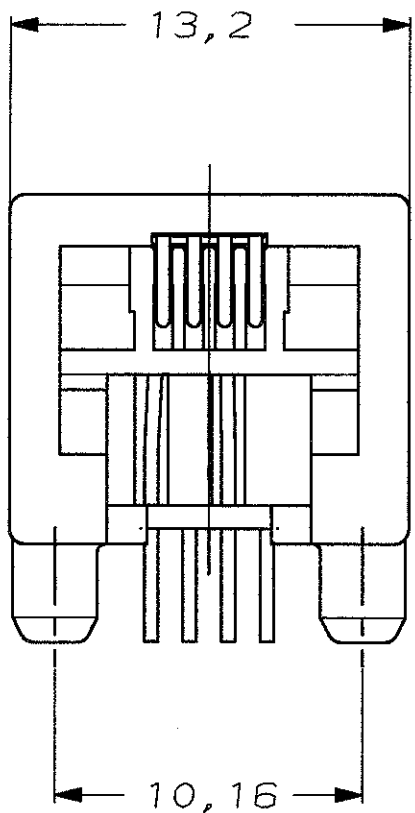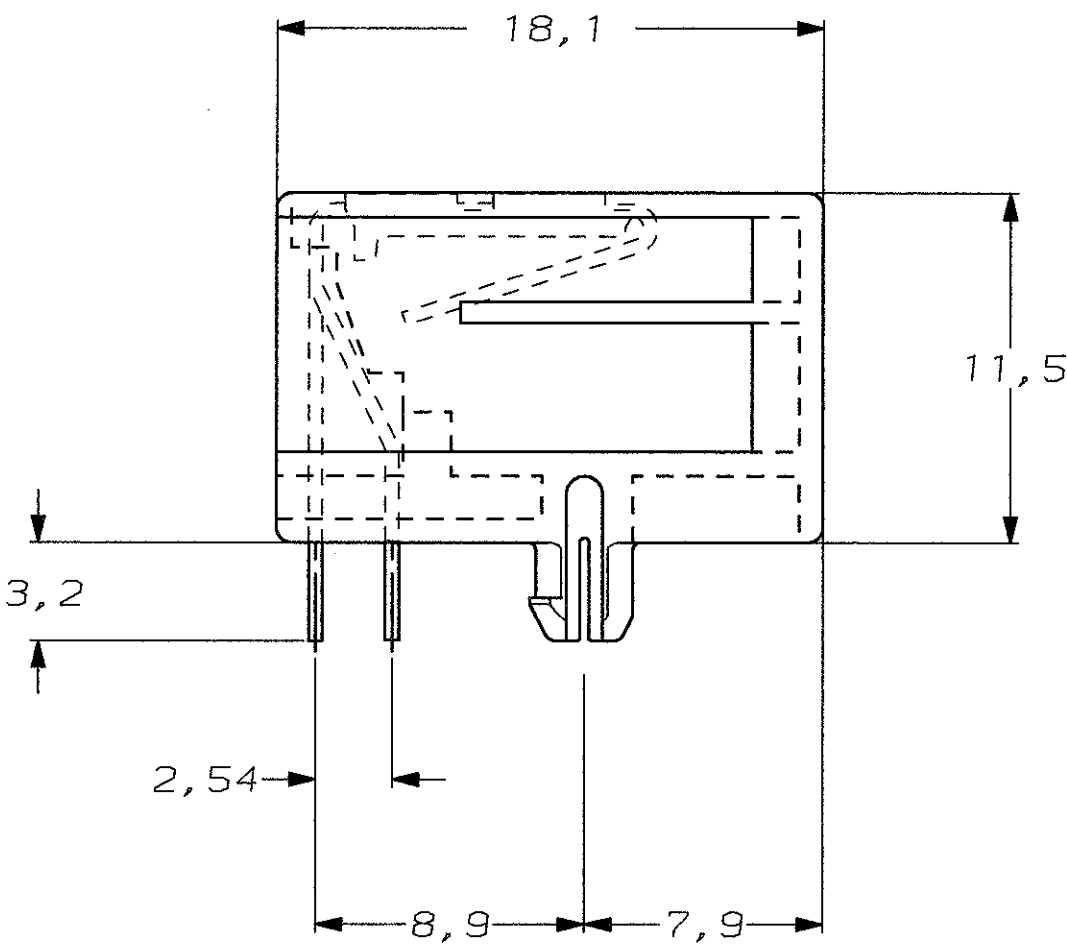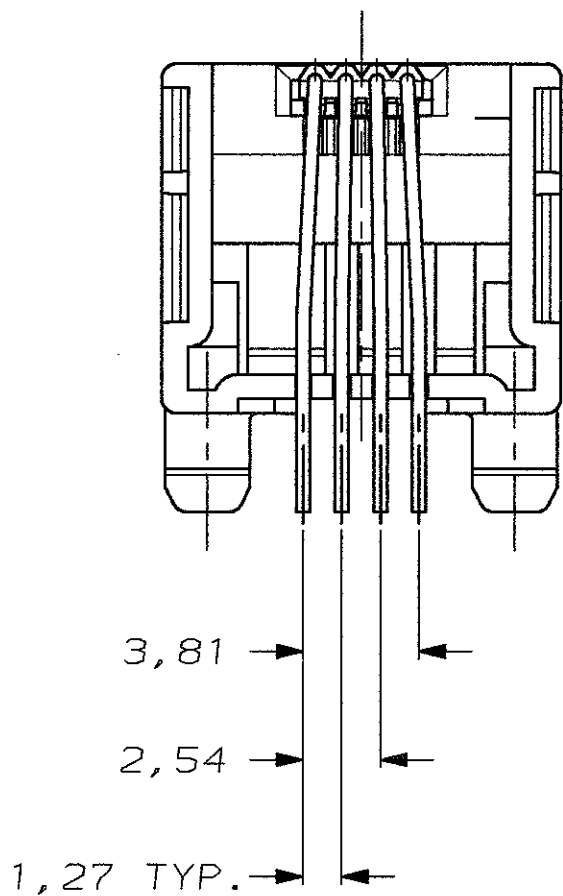








PRINTED CIRCUIT BOARD LAYOUT (6 POS./4 CONTACTS)
[VIEW SHOWN IS CIRCUIT (NONCOMPONENT) SIDE OF BOARD.]
PRINTED CIRCUIT BOARD THICKNESS: 1,6 mm NOMINAL.
TOLERANCES UNLESS OTHERWISE SPECIFIED: $\pm 0,05$

108 PIECES IN MULTI-TUBE	6 POS./4 CONTACTS	IN CONTACT AREA: 1,2 μ m MIN. SEL. GOLD OVER 1,2 μ m MIN. NICKEL. SOLDER TINES: 2,5 μ m MIN. TIN-LEAD OVER 1,2 μ m MIN. NICKEL.	HOUSING COLOR BLACK: PBT, UL 94V-0 CONTACT INSERT: PBT, UL 94V-0 CONTACTS: Ph BRONZE	1-215876-2
TAPE MOUNTED 800 PCS./REEL				215876-2
PACKAGING	REMARKS	FINISH	MATERIAL	ORDER NUMBER
CUSTOMER DRAWING FOR REFERENCE ONLY WILL NOT BE UPDATED				
© COPYRIGHT 19- BY AMP HOLLAND B.V. ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN AND/OR PATENTS PENDING.				
THIS DRAWING IS UNPUBLISHED RELEASED FOR PUBLICATION				
AMP HOLLAND B.V. 's-Hertogenbosch, The Netherlands.				
NAME MODULAR JACK, SIDE ENTRY, 6/4 FOR PRINTED CIRCUIT BOARD.				
LTR.	REVISION RECORD	DR.	CHK.	DATE
DR.: 6. CONSTANT	CHK.: 6. CONSTANT	APP.: R. SHEETS	DWG. No.	REV. LTR. SHEET
DATE: 24 SEP 96	DATE: 24 SEP 96	DATE: -	C-215876	U 2 OF 3

LOC	DIST	REVISIONS			
		LTR	DESCRIPTION	DATE	APVD
H	-	U	EH-0667-97	6 AUG 97	MvE
		V	EH-1044-97	14 OCT 97	MvE
		Y	EH-0966-98	29 JUN 98	MvE
		Z	EH-2155-98	11 DEC 98	MvE

NOTES:

- 1 TOLERANCE UNLESS OTHERWISE SPECIFIED: $\pm 0,15$.
- 2 FOR THIS PACKAGING METHOD THE TRUE POSITION OF THE SOLDER TINES IS NOT GUARANTEED.

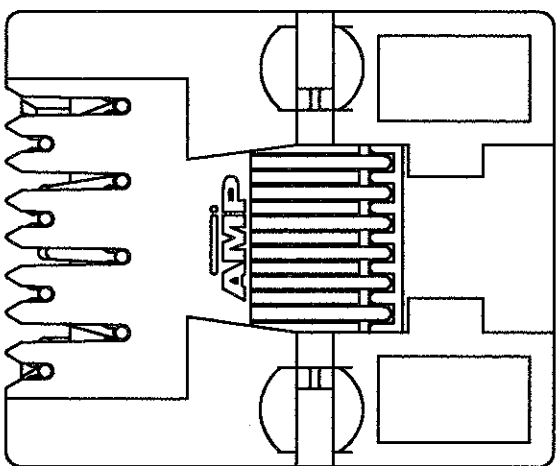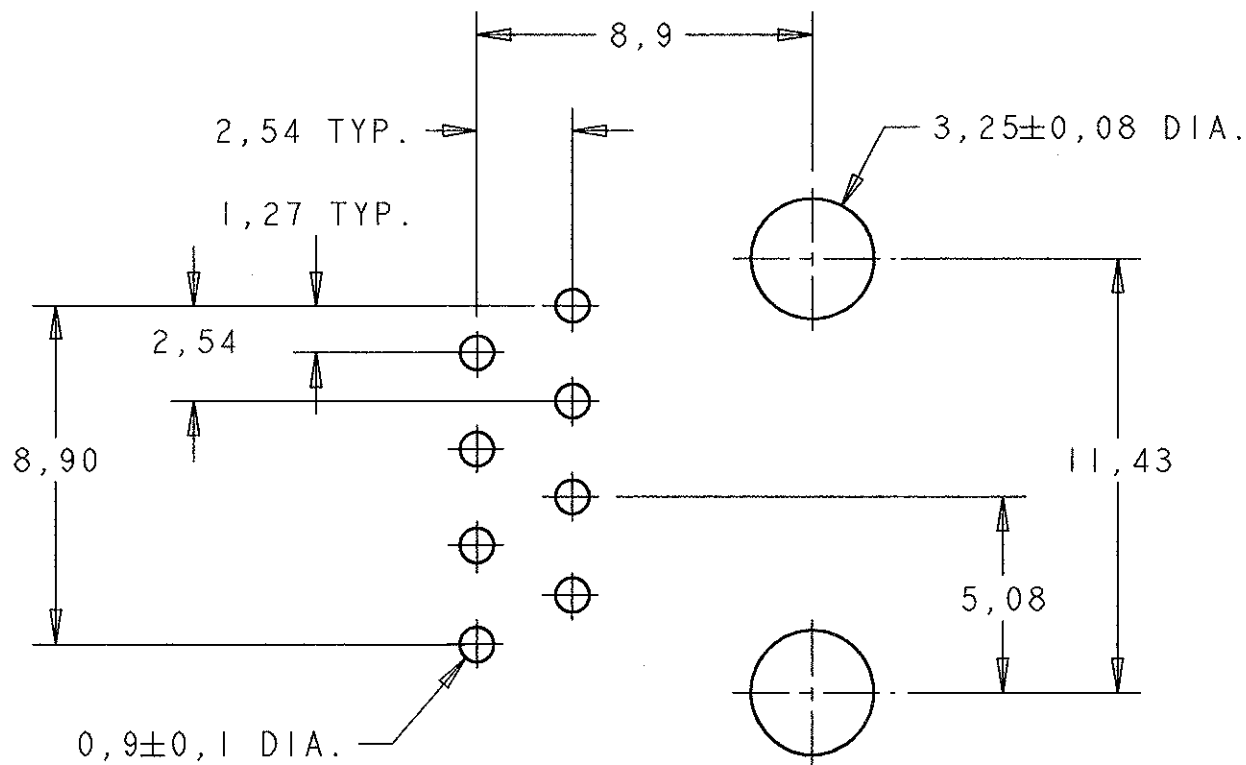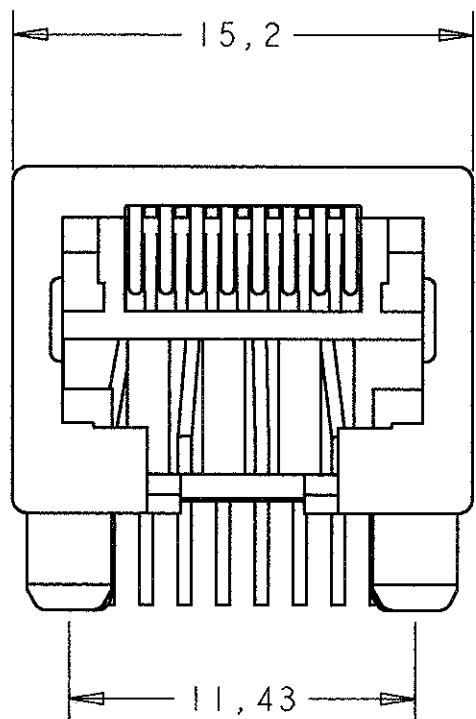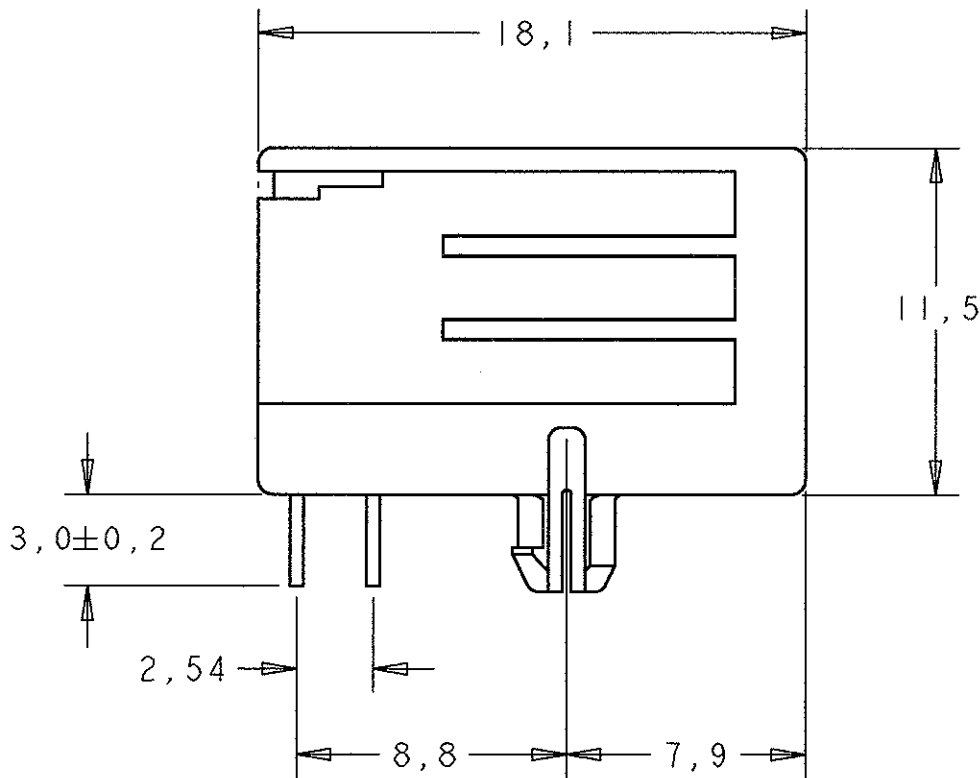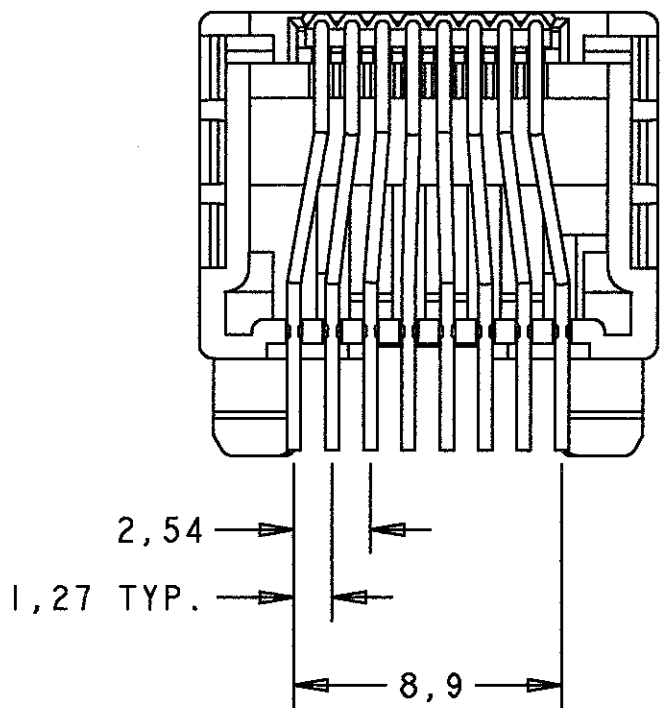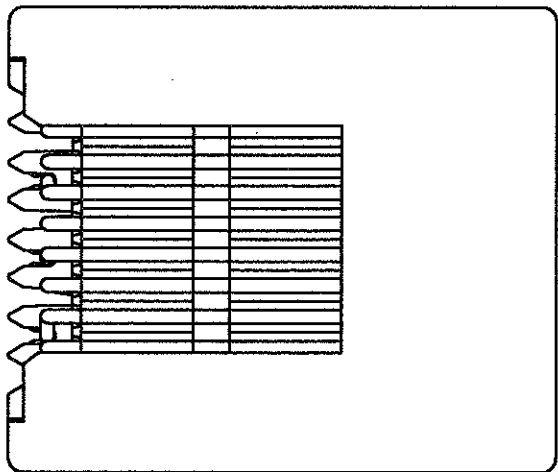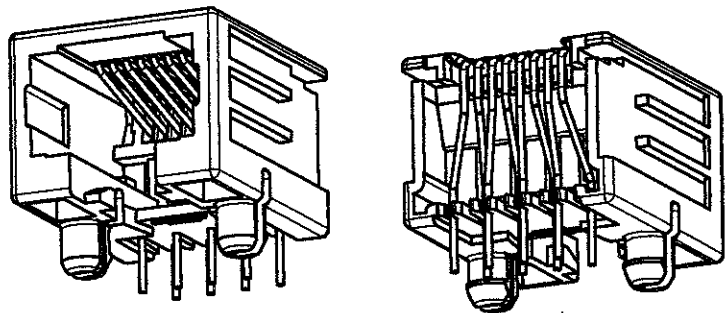

1000 PIECES BULK PACKAGED	8 POS. / 8 CONTACTS	IN CONTACT AREA: 1,2 μ m MIN. SEL. GOLD OVER 1,2 μ m MIN. NICKEL. SOLDER TINES: 2,5 μ m MIN. TIN-LEAD OVER 1,2 μ m MIN. NICKEL.	HOUSING COLOR: BLACK PBT, UL 94V-0 CONTACT INSERT: PBT, UL 94V-0 CONTACTS: PH BRONZE	2-215877-1
				1-215877-3
				1-215877-1
				215877-1
200 PIECES IN A TRAY	8 POS. / 8 CONTACTS	IN CONTACT AREA: 1,2 μ m MIN. SEL. GOLD OVER 1,2 μ m MIN. NICKEL. SOLDER TINES: 2,5 μ m MIN. TIN-LEAD OVER 1,2 μ m MIN. NICKEL.	HOUSING COLOR: BLACK PBT, UL 94V-0 CONTACT INSERT: PBT, UL 94V-0 CONTACTS: PH BRONZE	215877-1
90 PIECES IN MULTI-TUBE				215877-1
TAPE MOUNTED 700 PCS./REEL				215877-1
PACKAGING				ORDER NUMBER

DWN		EvEJJK		AMP 's-Hertogenbosch, The Netherlands							
CHK		M.vESSEN									
DESIGNED:	APVD		R. SWEETS		NAME MODULAR JACK SIDE ENTRY, 8 POS., FOR PRINTED CIRCUIT BOARD.						
	PRODUCT SPEC		108-19064								
	APPLICATION SPEC		114-19019		SIZE A2						
WEIGHT		-		CAGE CODE 00779					DRAWING NO C- 215877		
				SCALE 4:1				SHEET 1 OF 1		REV Z	

PRINTED CIRCUIT BOARD LAYOUT
[VIEW SHOWN IS CIRCUIT (NONCOMPONENT) SIDE OF BOARD.]
PRINTED CIRCUIT BOARD THICKNESS: 1,6 mm NOMINAL.
TOLERANCE UNLESS OTHERWISE SPECIFIED: $\pm 0,05$