

PRODUKTINFORMATION

Vi reserverar oss mot fel samt förbehåller oss rätten till ändringar utan föregående meddelande

ELFA artikelnr


67-307-17 Ellytkond SMD 22uF/6V
67-307-33 Ellytkond SMD 47uF/6V
67-307-41 Ellytkond SMD 100uF/6V
67-308-16 Ellytkond SMD 10uF/16V
67-308-24 Ellytkond SMD 22uF/16V
67-308-40 Ellytkond SMD 47uF/16V
67-309-15 Ellytkond SMD 4,7uF/35V
67-309-23 Ellytkond SMD 10uF/35V
67-309-31 Ellytkond SMD 22uF/35V
67-310-53 Ellytkond SMD 1uF/50V
67-310-61 Ellytkond SMD 2,2uF/50V
67-310-87 Ellytkond SMD 4,7uF/50V
67-310-95 Ellytkond SMD 10uF/50V

RVS Vertical Chip Electrolytic Capacitors

Series RVS Chip Aluminum Electrolytic Capacitors.

- For surface mount 105°C, 1000 hours guaranteed.
- Carrier taping supplied.

Outline Drawing

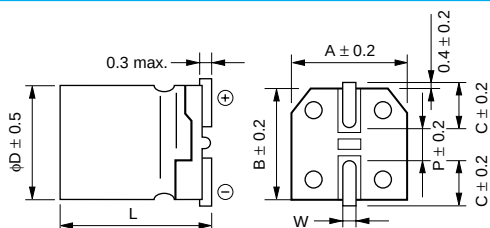

Lead spacing and wire diameter

φD	L	A	B	C	W	P
4	5.3 ± 0.2	4.3	4.3	2.0	0.5 to 0.8	1.0
5	5.3 ± 0.2	5.3	5.3	2.3	0.5 to 0.8	1.5
6.3	5.3 ± 0.2	6.6	6.6	2.7	0.5 to 0.8	2.0

Unit: mm

Photo



Specifications

No.	Item	Performance																				
1	Temperature range (°C)	–55 to +105°C																				
2	Leakage current (μA)	Less than 0.01 CV or 3 whichever is larger (after two minutes) C: Capacitance (μF), V: Voltage (V) (20°C)																				
3	Capacitance tolerance (%)	±20 (20°C, 120 Hz)																				
4	Tangent of loss angle (tan δ)	<table><tr><td>Rated voltage (V)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td></tr><tr><td>tan δ</td><td>0.30</td><td>0.26</td><td>0.22</td><td>0.16</td><td>0.13</td><td>0.12</td></tr></table> (20°C, 120 Hz)	Rated voltage (V)	6.3	10	16	25	35	50	tan δ	0.30	0.26	0.22	0.16	0.13	0.12						
Rated voltage (V)	6.3	10	16	25	35	50																
tan δ	0.30	0.26	0.22	0.16	0.13	0.12																
5	Stability at low temperature	<table><tr><td>Rated voltage (V)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td></tr><tr><td rowspan="2">Impedance ratio</td><td>Z–25°C/Z+20°C</td><td>4</td><td>3</td><td>2</td><td>2</td><td>2</td></tr><tr><td>Z–40°C/Z+20°C</td><td>8</td><td>5</td><td>4</td><td>3</td><td>3</td></tr></table> (120 Hz)	Rated voltage (V)	6.3	10	16	25	35	50	Impedance ratio	Z–25°C/Z+20°C	4	3	2	2	2	Z–40°C/Z+20°C	8	5	4	3	3
Rated voltage (V)	6.3	10	16	25	35	50																
Impedance ratio	Z–25°C/Z+20°C	4	3	2	2	2																
	Z–40°C/Z+20°C	8	5	4	3	3																
6	Endurance (105°C) (Applied ripple current)	<table><tr><td>Test time</td><td>1000 hrs</td></tr><tr><td>Leakage current</td><td>Initial specified value or less</td></tr><tr><td>Change in capacitance</td><td>Within ±20% of initial value</td></tr><tr><td>tan δ</td><td>200% or less of initial specified value</td></tr></table>	Test time	1000 hrs	Leakage current	Initial specified value or less	Change in capacitance	Within ±20% of initial value	tan δ	200% or less of initial specified value												
Test time	1000 hrs																					
Leakage current	Initial specified value or less																					
Change in capacitance	Within ±20% of initial value																					
tan δ	200% or less of initial specified value																					
7	Max. storage temp. (105°C)	Test time 1000 hrs. Others have same as endurance. Voltage application treatment.																				
8	Applicable Standards	JIS C 5101-1, 5101-18 1998 (IEC 60384-1 1992, 60384-18 1993)																				

Coefficients of Frequency for Ripple Current

Frequency (Hz)	50 • 60	120	1 k	10 k • 100 k
Rated Voltage (V)				
6.3 to 16	0.8	1	1.15	1.25
25 to 35	0.8	1	1.25	1.40
50	0.8	1	1.35	1.50

Coefficients of Temperature for Ripple Current

Temperature (°C)	+70 or less	+85	+105
Coefficients	2.1	1.75	1

RVS Vertical Chip Electrolytic Capacitors

Case size by working voltage & capacitance (in mm)

(mm)

WV(V) Cap.(μF)	6.3	10	16	25	35	50
0.1						4 x 5.3
0.22						4 x 5.3
0.33						4 x 5.3
0.47						4 x 5.3
1						4 x 5.3
2.2						4 x 5.3
3.3						4 x 5.3
4.7				4 x 5.3	4 x 5.3	5 x 5.3
10		4 x 5.3	4 x 5.3	5 x 5.3	5 x 5.3	6.3 x 5.3
22	4 x 5.3	5 x 5.3	5 x 5.3	6.3 x 5.3	6.3 x 5.3	
33	5 x 5.3	5 x 5.3	6.3 x 5.3	6.3 x 5.3		
47	5 x 5.3	6.3 x 5.3	6.3 x 5.3			
100	6.3 x 5.3					

Standard Ratings

ELNA PART NO. / WV (V)	CAP. (μF)	SIZE (φ x L) (mm)	tan δ	ESR (Ω)	Ripple Current (mA _{rms})
6.3 V					
RVS-6V220M-R	22	4 x 5.3	0.30	8.0	21
RVS-6V330M-R	33	5 x 5.3	0.30	4.0	30
RVS-6V470M-R	47	5 x 5.3	0.30	4.0	36
RVS-6V101M-R	100	6.3 x 5.3	0.30	2.2	61
10 V					
RVS-10V100M-R	10	4 x 5.3	0.26	8.0	15
RVS-10V220M-R	22	5 x 5.3	0.26	4.0	25
RVS-10V330M-R	33	5 x 5.3	0.26	4.0	31
RVS-10V470M-R	47	6.3 x 5.3	0.26	2.2	43
16 V					
RVS-16V100M-R	10	4 x 5.3	0.22	8.0	16
RVS-16V220M-R	22	5 x 5.3	0.22	4.0	28
RVS-16V330M-R	33	6.3 x 5.3	0.22	2.2	40
RVS-16V470M-R	47	6.3 x 5.3	0.22	2.2	47
25 V					
RVS-25V47M-R	4.7	4 x 5.3	0.16	8.0	12
RVS-25V100M-R	10	5 x 5.3	0.16	4.0	21
RVS-25V220M-R	22	6.3 x 5.3	0.16	2.2	36
RVS-25V330M-R	33	6.3 x 5.3	0.16	2.2	44

ELNA PART NO. / WV (V)	CAP. (μF)	SIZE (φ x L) (mm)	tan δ	ESR (Ω)	Ripple Current (mA _{rms})
35 V					
RVS-35V47M-R	4.7	4 x 5.3	0.13	8.0	14
RVS-35V100M-R	10	5 x 5.3	0.13	4.0	23
RVS-35V220M-R	22	6.3 x 5.3	0.13	2.2	50
50 V					
RVS-50V10M-R	0.1	4 x 5.3	0.12	12.0	2
RVS-50V22M-R	0.22	4 x 5.3	0.12	12.0	3
RVS-50V33M-R	0.33	4 x 5.3	0.12	12.0	4
RVS-50V47M-R	0.47	4 x 5.3	0.12	12.0	5
RVS-50V010M-R	1	4 x 5.3	0.12	12.0	7
RVS-50V22R2M-R	2.2	4 x 5.3	0.12	12.0	10
RVS-50V33R3M-R	3.3	4 x 5.3	0.12	12.0	12
RVS-50V47R7M-R	4.7	5 x 5.3	0.12	6.0	17
RVS-50V100M-R	10	6.3 x 5.3	0.12	3.0	26

Note: ESR 100 kHz at 20°C.
Allowable Ripple Current 120 Hz at 105°C