



2001-05-23

PRODUKTINFORMATION

Vi reserverar oss mot fel samt förbehåller oss rätten till ändringar utan föregående meddelande

ELFA artikelnr

70-430-78 LL4001 diod 1A50v MELF

70-430-86 LL4002 diod 1A100v MELF

70-430-94 LL4003 diod 1A200v MELF

70-431-69 LL4005 diod 1A600v MELF

70-431-77 LL4006 diod 1A800v MELF



LL4001G THRU LL4007G

1.0 AMP Surface Mount Glass Passivated Silicon Rectifiers



Voltage Range
50 to 1000 Volts
Current
1.0 Ampere


Features

- ✧ Plastic package has carries underwriters Laboratory flammability classification 94V-0
- ✧ Surge overload rating to 30 Amperes peak
- ✧ Ideal for printed circuit board.
- ✧ Reliable low cost construction utilizing molded plastic technique results in in-expensive product.
- ✧ High temperature soldering guaranteed: 250°C / 10 seconds at terminals.

Mechanical Data

- ✧ Solderability per MIL-STD-750, method 208 at terminals.
- ✧ Mounting position: Any
- ✧ Weight: 0.12 gram

MELF

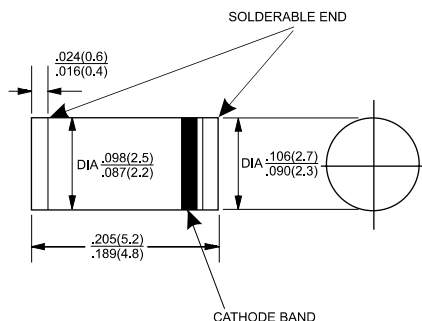

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	LL 4001G	LL 4002G	LL 4003G	LL 4004G	LL 4005G	LL 4006G	LL 4007G	Units
Maximum Recurrent Peak Reverse Voltage	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @T _A = 75°C	1.0							A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	30							A
Maximum Instantaneous Forward Voltage @1.0A	1.1							V
Maximum DC Reverse Current @ T _A =25°C at Rated DC Blocking Voltage @ T _A =125°C	5 100							uA uA
Typical Junction Capacitance (Note 1)	15							pF
Typical Thermal Resistance R _{θJC} (Note 2)	50							°C/W
Operating and Storage Temperature Range T _J , T _{STG}	- 65 to + 150							°C

Notes: 1. Measured at 1 MHz and Applied Reverse Voltage of 4.0 Volts D.C.

2. Thermal Resistance from Junction to Ambient.

RATINGS AND CHARACTERISTIC CURVES (LL4001G THRU LL4007G)

FIG.1- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

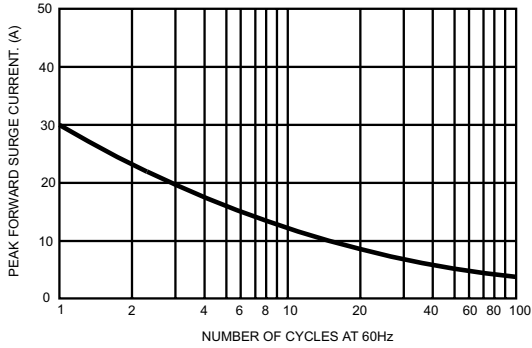


FIG.2- MAXIMUM FORWARD CURRENT DERATING CURVE

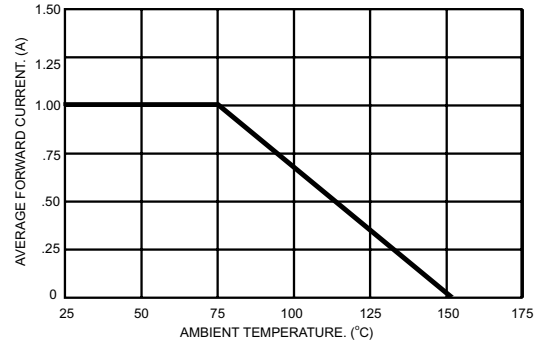


FIG.3- TYPICAL JUNCTION CAPACITANCE

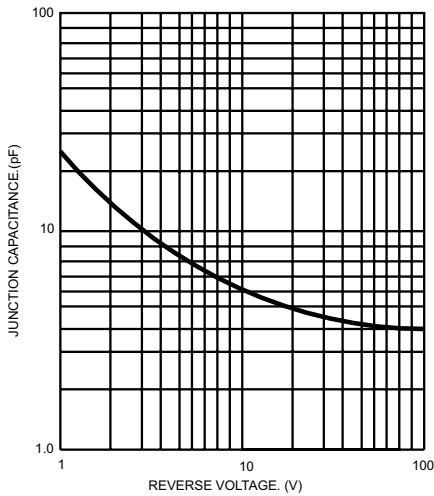


FIG.4- TYPICAL FORWARD CHARACTERISTICS

