



2001-06-26

PRODUKTINFORMATION

Vi reserverar oss mot fel samt förbehåller oss rätten till ändringar utan föregående meddelande

ELFA artikelnr

37-205-05 Relä 1 pol V23092 5VDC

37-205-13 Relä 1 pol V23092 12VDC

37-205-21 Relä 1 pol V23092 24VDC

Slim PCB Relay SNR

1 pole 6 A



- 1 C/O or 1 N/O contact
- Only 5 mm wide
- 6 A switching current
- Cadmium-free contacts
- Sensitive coil 170 mW
- 4 kV coil-contact, 6 / 8 mm clearance/creepage
- N/O Version with 8 / 8 mm clearance/creepage on request
- Protection class II
- Allows high function-/packing density

Applications: Centralized and decentralized heating control,



Contact data

Configuration	1 C/O contact or 1 N/O contact
Type of contact	single contact
Rated current	6 A
Rated voltage / max. breaking voltage AC	250 Vac / 440 Vac
Maximum breaking capacity AC	1500 VA
Contact material	AgSnO ₂ AgSnO ₂ gold plated
Minimum contact load	≥100 mA, 12V ≥10 mA, 5 V

Contact life

Type	Load	Operations
-A302	5 A, 250 Vac, resistive	1x10 ⁵
-A302	2 A, 250 Vac, cosφ0.4	2x10 ⁵
-A302	1 A, 24 Vdc, L / R=48 ms	2x10 ⁵

Coil data


Nominal voltage	5...48 Vdc
Nominal coil power	170 mW
Operate power	75 mW
Operate category	2 / b

Coil versions


Coil code	Nominal voltage Vdc	Pull-in voltage Vdc	Release voltage Vdc	Maximum voltage Vdc	Coil resistance Ω	Coil current mA
005	5	3.5	0.25	11.2	147±10%	34.0
012	12	8.4	0.6	26.8	848±10%	14.2
024	24	16.8	1.2	53.7	3390±10%	7.1
048	48	33.6	2.4	100.0	10600±15%	4.5

All figures are given for coil without preenergization, at ambient temperature +20°C
Other coil voltages on request


Max. DC load breaking capacity

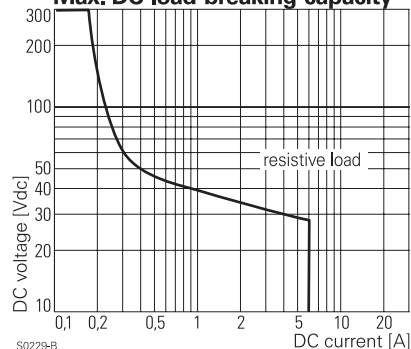

Electrical life

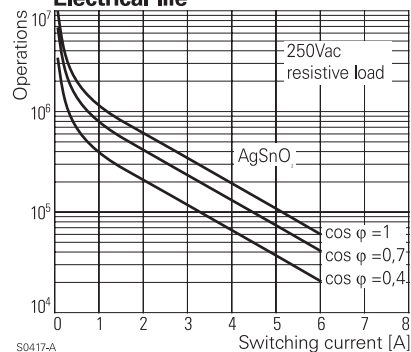

Coil operating range DC

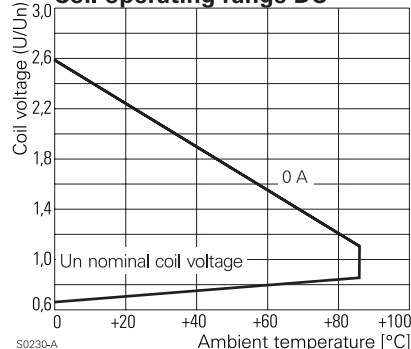

Slim PCB Relay SNR

1 pole 6 A

Insulation

Dielectric strength	coil-contacts	4000 V _{rms}
	open contact circuit	1000 V _{rms}
Surge voltage resistance	coil-contacts	6000 V (1.2 / 50 µs)
Clearance / creepage (Standard)		6 / 8 mm
Insulation to IEC 664/VDE 0110 (04/97)		
	Voltage rating	250 V
	Pollution degree	3
	Overvoltage category	III
Insulation to VDE 0110b (2/79)		
	Insulation category / reference voltage	C / 250
Tracking resistance of relay base		CTI 250


Other data

Flammability class UL	V-0
Ambient temperature	-40...+85 °C
Mechanical life	10x10 ⁶ operations
Max. switching rate at rated- / minimum load	6 min ⁻¹ / 20 s ⁻¹
Operate- / release time	5 / 2.5 ms
Bounce time N/O / N/C contact	1.5 / 5 ms
Protection category	IP67
Relay weight	6 g
Packaging unit	20 / 1000 pcs.


Dimensions

Dimensions in mm

Vertical version

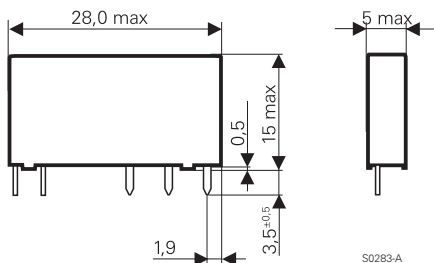


Flat pack version

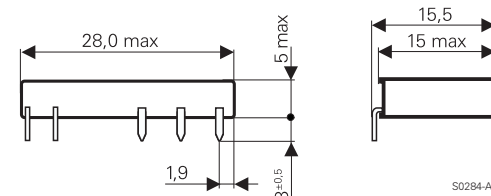

PCB layout / terminal assignment


View on solder pins

Dimensions in mm

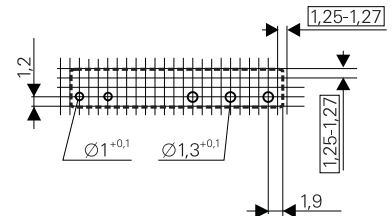


1 C/O contact

S0258-AA



S0258-AB

1 N/O contact



S0258-AC

Ordering key

V 2 3 0 9 2 - **1** - **A**

Type

Version

A PCB vertical version **B** PCB flat pack version

Version

1 washable

Coil

Coil code: please refer to coil versions table

Contact system

A standard

Contact material

2 AgSnO₂, gold plated

3 AgSnO₂

Contact configuration

01 1 C/O contact

02 1 N/O contact

N/O version with 8/8mm clearance and creepage and other types on request