

PERFORMANCE CERTIFIED BY IIT MUMBAI

QUALITY NATURAL AIR VENTILATION SYSTEM



NATURAL AIR VENTILATOR



PP - POLYPROPYLENE

STAINLESS STEEL

FEATURES

Guarantee against water leakage.

No operating & maintenance cost.

Available in different sizes & grades

80% depreciations under section 32 of IT Act.

PP (Polypropylene) : Aesthetic look with 3 colors

APPLICATIONS

SS Grade 304 : For pickling plant and chemical plant.

SS Grade 430 : For factories, workshops, warehouses, automobile industry, power generation houses, boiler houses, pharmaceutical industry.

PP (Polypropylene) : For aesthetic look.



**SEALED BALL BEARING
SYSTEM**



**BI-FOLD
FINS**



**FITS ON ANY KIND
OF BASE**





**DOUBLE EXHAUST
TECHNOLOGY**

PNP POLYTEX PVT. LTD.

A 601 / 607, Mangal Aarambh, Kora Kendra, Near McDonalds's, Borivali (W), Mumbai - 400092

Mob : +91-9223391080, Tel : 022 67259601-05, Fax : 022 67259600, sales@pnppind.com, www.pnppind.com

22"HAO TURBO VENTILATOR SS 430 & 304 GRADE

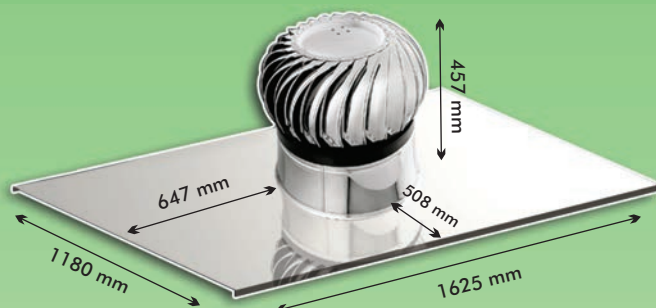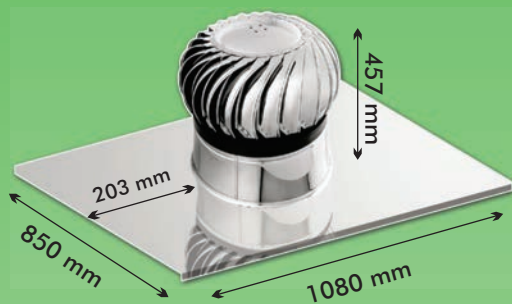

THICKNESS

Blades/Fin	0.30 mm
Top plate	0.50 mm
Top plate diameter	14.00 inch

FIN DIMENSIONS

No. of outer Fins	24 fins
No. of inner Fins	6 fins
Width of outer Fins	3.25 inch
Length of outer Fins	15.50 inch
Design of Fins	Double fold

TOP DIMENSIONS

Weight of top	4.85 Kg
Height of Top	15.00 inch
Inner Diameter of Ring	21.50 inch
Outer Diameter of Ring	21.80 inch
Middle diameter of Top	25.00 inch
Thickness of bottom ring	3.00 mm
Technology-Exhaust	Double

BEARINGS

No. of bearings	Two
Locations	Center
Sealed / not sealed	Sealed
Lubrication	Self


SHAFT

Material	Zinc Plated / SS 304
----------	----------------------


BASE

Material	Stainless Steel / Polycarbonate
----------	---------------------------------

POSITIONING

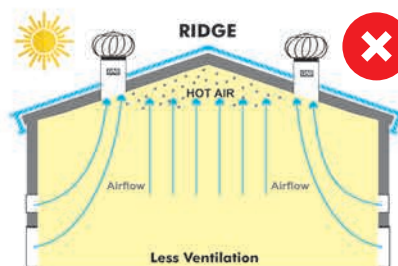

Ventilators should not be installed away from ridge or middle of the roof.

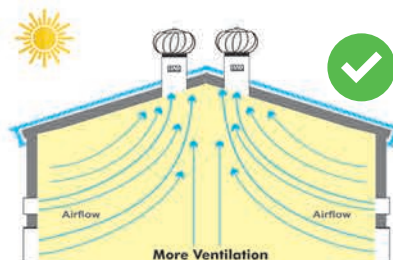

Ventilators should be installed near the ridge.

NO WATER LEAKAGE




Chances of water leakage will be more if installed on away from the ridges.




Chances of water leakage will be least if installed on the ridges.

NATURAL SUNLIGHT

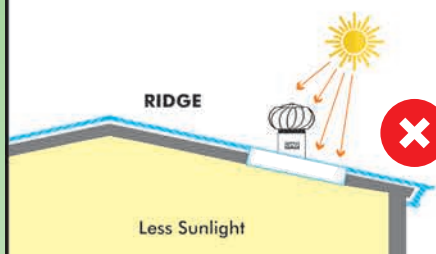

Usage of this position blocks the sunlight.

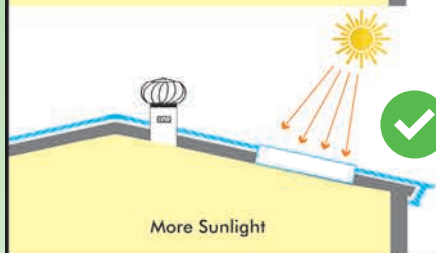

Usage of this position provides abundant sunlight.



PNP POLYTEX PVT. LTD.

• Bangalore : 91 98 4545 1036	• Kanpur : 91 92 3550 5442
• Bhillad : 91 93 2753 1927	• Kochi : 91 92 4947 3817
• Chennai : 91 92 8213 4421	• Kolkata : 91 92 3065 5308
• Delhi : 91 97 1111 4794	• Surat : 91 92 7690 9040
• Hyderabad : 91 92 4620 1036	• Mumbai : 91 92 2339 1080