          Generic Routing Encapsulation (GRE) Key Extension for Mobile IPv4

Abstract

   The Generic Routing Encapsulation (GRE) specification contains a Key
   field, which MAY contain a value that is used to identify a
   particular GRE data stream. This specification defines a new Mobile
   IP extension that is used to exchange the value to be used in the GRE
   Key field. This extension further allows the Mobility Agents to set
   up the necessary protocol interfaces prior to receiving the mobile
   node traffic. The new extension allows a Foreign Agent to request
   GRE tunneling without disturbing the Home Agent behavior specified
   for Mobile IPv4. GRE tunneling with the Key field allows the
   operators to have home networks that consist of multiple Virtual
   Private Networks (VPNs), which may have overlapping home addresses.
   When the tuple <Care of Address, Home Address, and Home Agent
   Address> is the same across multiple subscriber sessions, GRE
   tunneling will provide a means for the Foreign Agent and Home Agent
   to identify data streams for the individual sessions based on the GRE
   key. In the absence of this key identifier, the data streams cannot
   be distinguished from each other -- a significant drawback when using
   IP-in-IP tunneling.

Status of This Memo

   This is an Internet Standards Track document.

   This document is a product of the Internet Engineering Task Force
   (IETF). It represents the consensus of the IETF community. It has
   received public review and has been approved for publication by the
   Internet Engineering Steering Group (IESG). Further information on
   Internet Standards is available in Section 2 of RFC 5741.

   Information about the current status of this document, any errata,
   and how to provide feedback on it may be obtained at
   http://www.rfc-editor.org/info/rfc6245.

Table of Contents

1. Introduction

   This document specifies a new extension for use by a Foreign Agent
   (FA) operating Mobile IP for IPv4. The new extension allows a
   Foreign Agent to request Generic Routing Encapsulation (GRE)
   [RFC2784] tunneling without disturbing the Home Agent (HA) behavior
   specified for Mobile IPv4 [RFC5944]. This extension contains the GRE
   key [RFC2890] required for establishing a GRE tunnel between the FA
   and the HA.

   GRE tunneling with the Key field allows the operators to have home
   networks that consist of multiple Virtual Private Networks (VPNs),
   which may have overlapping home addresses. When the tuple <Care of
   Address, Home Address, and Home Agent Address> is the same across

   multiple subscriber sessions, GRE tunneling will provide a means for
   the FA and the HA to identify data streams for the individual
   sessions based on the GRE key. In the absence of this key
   identifier, the data streams cannot be distinguished from each other
   -- a significant drawback when using IP-in-IP tunneling.

2. Terminology

   The key words "MUST", "MUST NOT", "REQUIRED", "SHALL", "SHALL NOT",
   "SHOULD", "SHOULD NOT", "RECOMMENDED", "MAY", and "OPTIONAL" in this
   document are to be interpreted as described in [RFC2119]. Other
   terminology is used as already defined in [RFC5944].

3. GRE Key Extension

   The format of the GRE Key Extension conforms to the extension format
   specified for Mobile IPv4 [RFC5944]. This extension option is used
   by the Foreign Agent to supply GRE key and other necessary
   information to the Home Agent to establish a GRE tunnel between the
   FA and the HA.

4. Operation and Use of the GRE Key Extension

4.1. Foreign Agent Requirements for GRE Tunneling Support

   The FA MUST support IP-in-IP tunneling of datagrams for Mobile IPv4
   [RFC5944]. The FA may support GRE tunneling that can be used, for
   example, to allow for overlapping private home IP addresses
   (Section 4.2.2.5 of [X.S0011-E]). If the FA is capable of supporting
   GRE encapsulation, it should set the 'G' (GRE encapsulation) bit in
   the Flags field in the Agent Advertisement message sent to the Mobile
   Node (MN) during the Mobile IP session establishment.

   If the MN does not set the 'G' bit, the FA MAY fall back to using
   IP-in-IP encapsulation for the session per [RFC5944].

   If the MN does not set the 'G' bit and does not set the 'D'
   (Decapsulation by mobile node) bit (i.e., the mobile node does not
   request GRE tunneling and is not using a co-located care-of address),
   and the local policy allows the FA to override the 'G' bit setting
   received from the MN, the FA MUST include the GRE Key Extension as
   defined in this memo in the Registration Request (RRQ) that it
   propagates to the HA. The presence of this extension is a request
   for GRE encapsulation that takes precedence over the setting of the
   'G' bit in the Registration Request. The FA MUST NOT modify the 'G'
   bit in the Registration Request because it is protected by the
   Mobile-Home Authentication extension.

If the FA does not support GRE encapsulation, the FA MUST reset the 'G' bit in the Agent Advertisement message. In this case, if the MN sets the 'G' bit in the Registration Request message, the FA returns a Registration Reply (RRP) message to the MN with code 'requested encapsulation unavailable' (72) per [RFC5944].

If the FA allows GRE encapsulation, and either the MN requested GRE encapsulation or local policy dictates using GRE encapsulation for the session, and the 'D' bit is not set (i.e., the mobile node is not using a co-located care-of address), the FA MUST include the GRE Key in the GRE Key Extension in all Mobile IP Registration Requests (including initial, renewal, and de-registration requests) before forwarding the request to the HA. The FA may include a GRE key of value zero in the GRE Key Extension to signal that the HA assigns GRE keys in both directions. The GRE key assignment in the FA and the HA is outside the scope of this memo.

The GRE Key Extension SHALL follow the format defined in [RFC5944]. This extension SHALL be added after the MN-HA and MN-FA Challenge and MN-AAA (Mobile Node - Authentication, Authorization, and Accounting) extensions (if any) and before the FA-HA Auth extension (if any).

4.2. Home Agent Requirements for GRE Tunneling Support

The HA MUST follow the procedures specified in [RFC5944] in processing this extension in Registration Request messages.

If the HA receives the GRE Key Extension in a Registration Request and does not recognize this non-skippable extension, it MUST silently discard the message. The HA MUST use other alternative forms of encapsulation (e.g., IP-in-IP tunneling), when requested by the mobile node per [RFC5944].

If the HA receives the GRE Key Extension in a Registration Request and recognizes the GRE Key Extension but is not configured to support GRE encapsulation, it MUST send an RRP with code 'requested encapsulation unavailable (139)' [RFC3024].

If the HA receives a Registration Request with a GRE Key Extension but without the 'G' bit set, the HA SHOULD treat this as if the 'G' bit is set in the Registration Request; i.e., the presence of a GRE Key Extension indicates a request for GRE encapsulation.

If the HA receives the GRE Key Extension in a Registration Request, and it recognizes the GRE Key Extension as well as supports GRE encapsulation, the following procedures should apply:

o The HA SHOULD accept the RRQ and send an RRP with code
   'registration accepted (0)'.

o The HA MUST assign a GRE key and include the GRE Key Extension in
   the RRP before sending it to the FA.

o The HA MUST include the GRE Key Extension in all RRPs in response
   to any RRQ that included the GRE Key Extension, when a GRE key is
   available for the registration.

If the HA receives the GRE Key Extension in the initial Registration
Request and recognizes the GRE Key Extension carrying a GRE key value
of zero, it SHOULD accept the RRQ and send an RRP with code
'registration accepted (0)', and the following procedures apply:

o The HA MUST assign GRE keys for both directions and include these
   keys in the GRE Key Extension in the RRP before sending it to
   the FA.

o The HA MUST include the GRE Key Extension in the RRP in response
   to the initial RRQ that included the GRE Key Extension, when a GRE
   key is available for the registration.

4.3. Mobile Node Requirements for GRE Tunneling Support

If the MN is capable of supporting GRE encapsulation, it SHOULD set
the 'G' bit in the Flags field in the Registration Request per
[RFC5944].

5. GRE Key Extension and Tunneling Procedures

GRE tunneling support for Mobile IP will permit asymmetric GRE
keying; i.e., the FA assigns a GRE key for use in encapsulated
traffic, and the HA can assign its own GRE key. Once the GRE keys
have been exchanged, the FA uses the HA-assigned key in the
encapsulating GRE header for reverse tunneling, and the HA uses the
FA-assigned key in the encapsulating GRE header.

The format of the GRE Key Extension is as shown below.

The GRE Key Extension MAY be included in Registration Requests or
Registration Replies [RFC5944]. The GRE Key Extension is used to
inform the recipient of the Mobile IP request of the value to be used
in the GRE Key field.

```
 0                   1                   2                   3
 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1
+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+
|      Type     |    Sub-Type   |             Length            |
+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+
|                         Key Identifier                        |
+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+-+
```

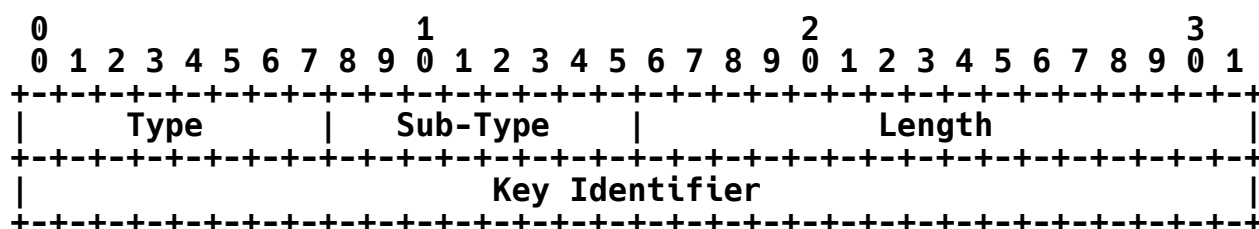   Figure 1: GRE Key Extension

   Type

      48 - An 8-bit identifier of the GRE Key Extension type
      (non-skippable)

   Sub-Type

      0

   Length

      4

   Key Identifier

      This is a four-octet value assigned during registration and
      inserted in every GRE packet of the user traffic.

6. IANA Considerations

   The GRE Key Extension defined in this memo is a Mobile IP extension
   as defined in [RFC5944]. IANA has assigned a Type value (48) for
   this extension from the non-skippable range (0-127).

   The GRE Key Extension introduces a new sub-type numbering space,
   where the value 0 has been assigned from the range 0 to 255.
   Approval of new GRE Key Extension sub-type values is to be made
   through Expert Review with Specification Required.

7. Security Considerations

   This specification does not introduce any new security
   considerations, beyond those described in [RFC5944].

Despite its name, the GRE Key Extension has little to do with
security. The word "Key" here is not used in the cryptographic sense
of a shared secret that must be protected but rather in the sense of
an "index" or demultiplexing value that can be used to distinguish
packets belonging to a given flow within a GRE tunnel.

8. Acknowledgements

Thanks to Jun Wang, Gopal Dommety, and Sri Gundavelli for their
helpful comments, offline discussions, and review of the initial
draft version of this document. Also, Pete McCann and Simon
Mizikovsky provided valuable review comments.

9. Normative References

[RFC2119]   Bradner, S., "Key words for use in RFCs to Indicate
              Requirement Levels", BCP 14, RFC 2119, March 1997.

[RFC2784]   Farinacci, D., Li, T., Hanks, S., Meyer, D., and P.
              Traina, "Generic Routing Encapsulation (GRE)", RFC 2784,
              March 2000.

[RFC2890]   Dommety, G., "Key and Sequence Number Extensions to
              GRE", RFC 2890, September 2000.

[RFC3024]   Montenegro, G., Ed., "Reverse Tunneling for Mobile IP,
              revised", RFC 3024, January 2001.

[RFC5944]   Perkins, C., Ed., "IP Mobility Support for IPv4,
              Revised", RFC 5944, November 2010.

[X.S0011-E]   3rd Generation Partnership Project 2, "cdma2000 Wireless
              IP Network Standard: Simple IP and Mobile IP Access
              Services", 3GPP2 X.S0011-002-E Version 1.0,
              November 2009, <http://www.3gpp2.org/Public_html/specs/
              X.S0011-002-E_v1.0_091116.pdf>.

Authors' Addresses

   Parviz Yegani
   Juniper Networks
   1194 North Mathilda Ave.
   Sunnyvale, California 94089
   USA
   Phone: +1 408-759-1973
   EMail: pyegani@juniper.net

   Kent Leung
   Cisco Systems Incorporated
   170 West Tasman Drive
   San Jose, California 95134
   USA
   Phone: +1 408 526 5030
   EMail: kleung@cisco.com

   Avi Lior
   Bridgewater Systems Corporation
   303 Terry Fox Drive
   Ottawa, Ontario K2K 3J1
   Canada
   Phone: +1 613-591-6655
   EMail: avi@bridgewatersystems.com

   Kuntal Chowdhury
   Cisco Systems Incorporated
   170 West Tasman Drive
   San Jose, California 95134
   USA
   EMail: kchowdhu@cisco.com

   Jay Navali
   Cisco Systems Incorporated
   170 West Tasman Drive
   San Jose, California 95134
   USA
   EMail: jnavali@cisco.com